



Ancon[®]

Channel, Bolts and Fixings

for the Construction Industry



We are one team. **We are Leviat.**

Leviat is the new name of CRH's construction accessories companies worldwide.

Under the Leviat brand, we have united the expertise, skills and resources of Ancon and its sister companies to create a world leader in fixing, connecting and anchoring technology.

The products you know and trust will remain an integral part of Leviat's comprehensive brand and product portfolio. As Leviat, we can offer you an extended range of specialist products and services, greater technical expertise, a larger and more agile supply chain and better, faster innovation.

By bringing together CRH's construction accessories family as one global organisation, we are better equipped to meet the needs of our customers, and the demands of construction projects, of any scale, anywhere in the world.

This is an exciting change. Join us on our journey.

Read more about Leviat at [Leviat.com](https://www.leviat.com)



Our product brands include:

Ancon[®]


HALFEN

HELIFIX 

 **ISEDIO**

PLAKA



60

locations

sales in
30+
countries

3000

people worldwide

Imagine. Model. Make.

Leviat.com

Channel, Bolts and Fixings



Ancon SD21 Channel Tie Fixed to Omega 21/18 Slot and MDC Support System Bolted to 30/20 Channel



Ancon 30/20 Channel



Cast-in Channels

Cast-in Channels range from simple self-anchoring slots for accepting restraint fixings to large capacity channels with integral anchors (pages 7-8). They provide the necessary adjustment required when fixing to concrete and can eliminate site drilling. Nail holes aid the fixing of channels to timber formwork and an infill prevents the ingress of concrete during casting.

Cast-in fixings do not generate expansive forces in the concrete. They can therefore be used at close centres and can often be used closer to the edges than expansion fixings.

Ancon Cast-in Channels have been independently certified. The anchor shapes of Ancon Channels are outside current European Technical Assessment documents and therefore these products cannot be CE marked.

Omega

The Omega 21/18 Channel is a self-anchoring channel for use with Ancon wall ties referenced _ _21. The shallow depth of 18mm allows the channel to be used where there is reduced cover to the reinforcement. Nail holes aid the fixing of the channel to timber formwork.

30/20

Patent No: EP0882164B

Ancon 30/20 is a high performance channel. Its unique shape allows the applied load to be fed directly from the channel lips to the anchors and the more compact section size improves its fit between reinforcement. Specially designed T-head bolts ride up the sloping sides of the channel and securely lock behind the front lips. This channel also accepts standard 20mm wide wall ties. 30/20 is filled with continuously extruded closed-cell PE-LD foam. This material is removed easily in long sections and is 100% recyclable.


Ancon 30/20 should be used in preference to 38/17 channel as 30/20 is a high performance channel and its lower material content offers considerable cost benefits.

Contents

Range of Fixings	4-5
Channel Profiles	6
Cast-in Channels	7-8
Installation Guidance	9
Surface-Fixed Channels	10
Expansion Bolts	11
Bonded Anchors	12
Steelgrip	13
Set Screws	14
Self-Drilling Screws	14
Plug and Screw Fixings	15
Concrete Fixing Screws	15
Applications	16
Other Ancon Products	16

CombiDeck

Ancon CombiDeck has been developed for use with the permanent metal deck shuttering of steel frame structures. CombiDeck edge support is supplied with an integral channel section, usually 30/20 channel, built into the side to accept Ancon 'T' head bolts. More information on this product can be found in the Ancon Masonry Support Systems literature.

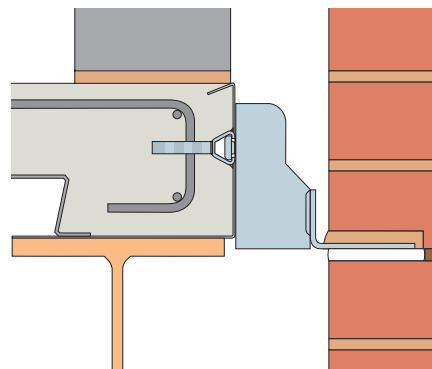

MDC Support System Fixed to CombiDeck Featuring 30/20 Channel

Surface-Fixed Channels

Plain-backed channels can be surface-fixed to steel, concrete and in some instances, masonry (page 10).

25/14

Ancon 25/14 channel has been designed to tie a masonry leaf to steel, timber or concrete frames through a layer of insulation. The channel accepts Ancon wall ties referenced __ 25, typically SD25, and is fixed with either CFS concrete screws (page 15) or HT high-thread self-drilling screws (page 14). A compression sleeve around the fixings may be required. 25/14 channel features alternate 5.3mm and 9.5mm diameter holes to accommodate both fixing types and a 16mm opening to accept a drive socket. It can be cut to length on site.

Bolt Fixings

Expansion Bolts

High Performance Expansion Bolts (FAZ II Plus) suitable for cracked and uncracked concrete (Page 11).

Bonded Anchors

These fixings create a strong chemical bond between the anchor and the host material. Resin is supplied in either ready-mixed capsules or mixed on application from a cartridge (page 12).

Fixings for Steelwork


The Ancon Steelgrip simplifies the fixing of support systems to hollow steel sections where access is only available from one side (page 13). Stainless steel set screws and self-drilling screws are also available (page 14).

Concrete Fixing Screws

CFS Concrete Fixing Screws are available to fix Ancon 25/14 to concrete through a layer of insulation (page 15).

Plug and Screw Fixings

Plug and screw fixings complete the range (page 15).

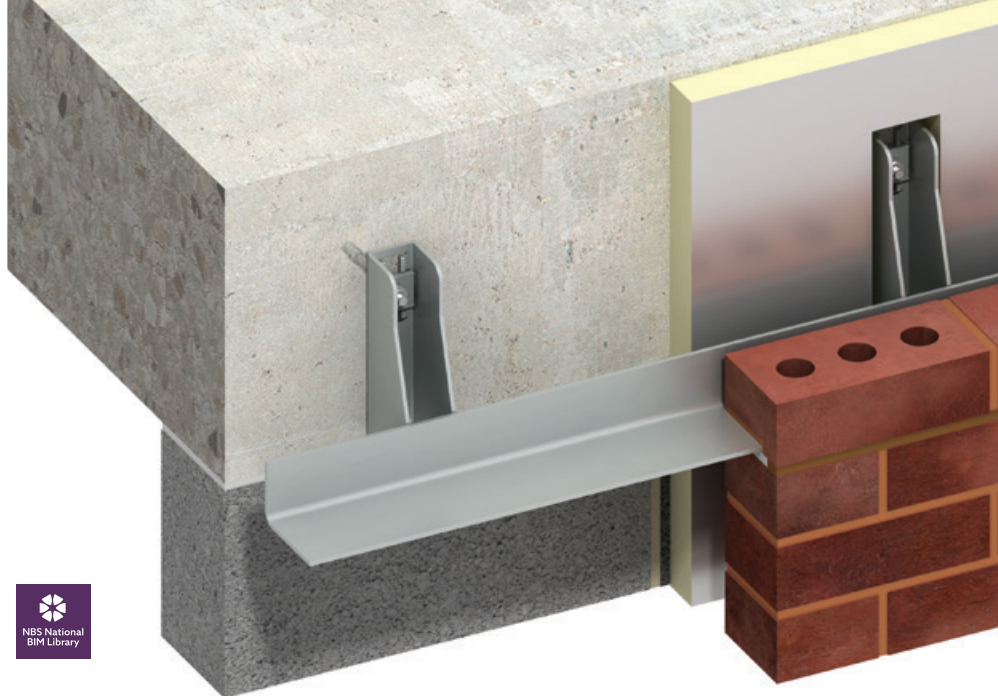

Ancon MDC System Fixed to Concrete with Single Expansion Bolts



Product Approvals & Certifications

UKCA Marking


The UKCA (UK Conformity Assessed) marking is the new UK product marking that will be used for goods being placed on the market in Great Britain.

CE UKNI Marking

The UKNI marking is a new conformity marking for products placed on the market in Northern Ireland which will be used on products that have undergone mandatory third-party conformity assessment by a body based in the UK.

CE Marking

For products used in Europe the existing CE mark will still remain. Our DoPs have been updated, please visit www.ancon.co.uk/approvals for the latest versions.

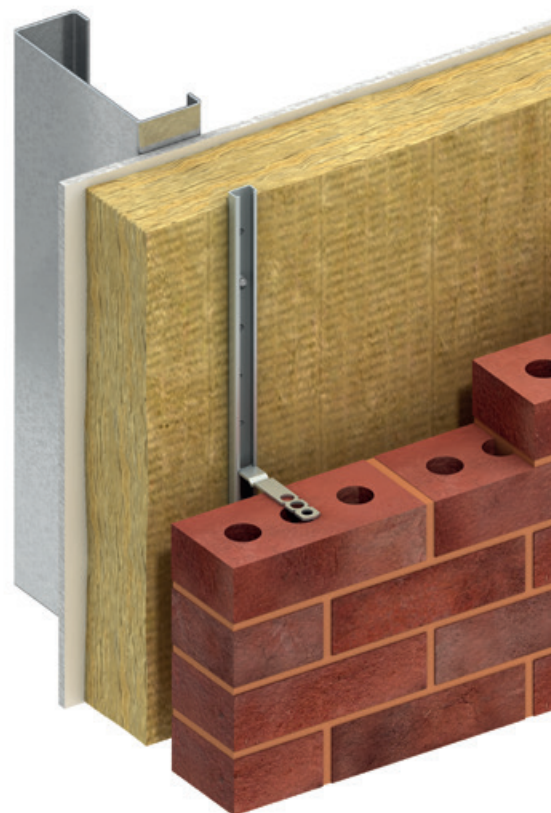

Ancon 25/14 Channel System complete with SD25 Wall Tie and Self-Drilling Screw



Ancon Corner Guards

Corner Guards


Corner Guards offer protection to exposed edges of columns and walls in areas of high traffic such as car parks, warehouses, hospitals etc. Leviat manufactures Ancon corner guards in a standard length of 1250mm in either stainless steel, galvanised steel or untreated mild steel. Stainless steel provides the greatest corrosion resistance and, where aesthetics are important, can be supplied with a satin-polished surface finish. Corner guards can be either cast-in to concrete or post-fixed to almost any material. For more information please contact us.

Channel, Bolts and Fixings


Ancon Channel

Ancon Channels are produced in a range of profiles, as illustrated.


21/18 - Omega




36/8




25/14




28/15




38/17*




30/20*




40/25



49/30

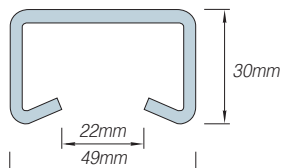

54/33

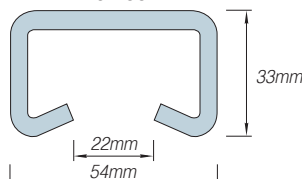

The table below shows channel lengths, availability and, where appropriate, the 'T' bolt required.

Product Range

Channel Reference	Standard Bolts	Preferred 'T' Bolt Length (mm)	Tightening Torque (Nm)	Other Size Bolts	Preferred Lengths (mm)	Stainless Steel	
						304	316
21/18	-	-	-	-	100, 3000	✓	✗
36/8	-	-	-	-	1000, 2400, 3400	✓	✗
25/14	-	-	-	-	2700, 3000	✓	✓
28/15	M10	50, 80	20	-	100, 150, 3000	✓	✓
38/17*	M12	50, 100	30	M16 x 50	100, 150, 3000	✓	✓
30/20*	M12	50, 90	50	-	100, 150, 3000	✓	✗
40/25	M16	50	70	-	1000, 3000	✓	✓
49/30	M16	50	70	M12 x 50, M20 x 55	3000	✓	✓
54/33	M16	50	70	M12 x 50	3000	✓	✗

Notes: The recommended tightening torque is for the standard bolts. *Ancon 30/20 should be used in preference to 38/17 channel. 30/20 is a high performance channel and its lower material content offers considerable cost benefits.

Section Properties


Channel References	25/14	28/15	36/8	38/17	40/25	49/30	54/33
Mass (Kg/m)	0.51	1.08	0.63	1.73	2.11	3.03	4.98
Area (cm ²)	0.64	1.36	0.79	2.19	2.67	3.84	6.30
I _y (cm ⁴)	0.16	0.38	0.09	0.74	2.03	4.26	7.53
I _z (cm ⁴)	0.60	1.37	1.13	3.93	6.09	13.15	22.75
W _{el,y} (cm ³)	0.17	0.43	0.16	0.74	1.38	2.41	3.95
W _{el,z} (cm ³)	0.48	0.98	0.63	2.07	3.04	5.37	8.42

Cast-in Channels

Channel Lugs

Channels are supplied with either integral double crimped lugs or single welded 'L' lugs, depending on the size of the channel. 'Bull Horn' lugs are welded at 90° to the line of the channel and can be specified as an alternative to the standard double crimped lugs.

Ancon Cast-in Channels have been independently certified. The anchor shapes of Ancon Channels are outside current European Technical Assessment documents and therefore these products cannot be CE marked.

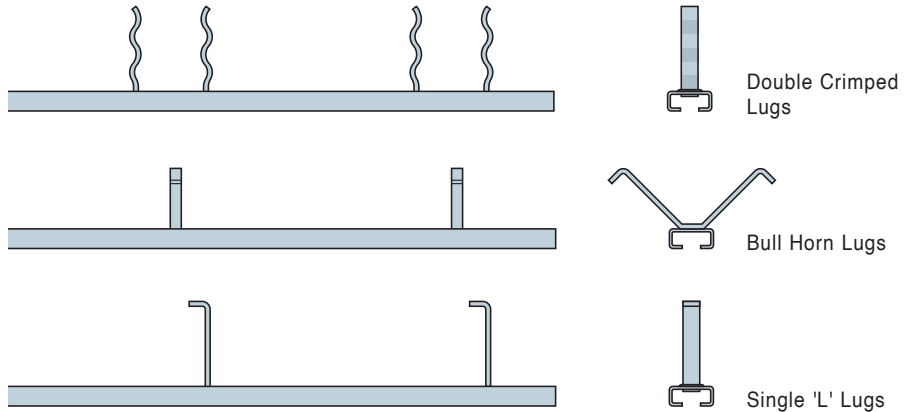


Channel Infill

All Ancon channels are supplied filled to help stop the ingress of concrete during casting. Ancon 28/15, 30/20 and 38/17 are filled with continuously extruded closed-cell PE-LD foam. This material is removed easily in long sections and is 100% recyclable. Expanded polystyrene is supplied in other channels.

Ancon 30/20 Channel




Single 'L' Lugs

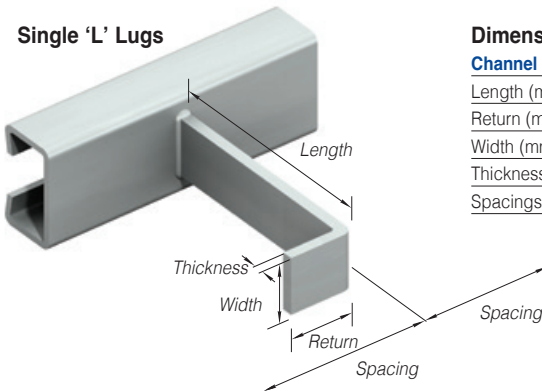

Dimensions

Channel Ref	54/33
Length (mm)	120
Return (mm)	35
Width (mm)	30
Thickness (mm)	6
Spacings (mm)	235

Double Crimped Lugs

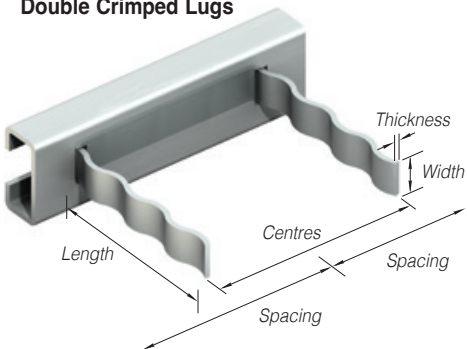


Dimensions

Channel Ref	28/15	38/17	30/20	40/25	49/30
Length (mm)	65	65	65	65	65
Centres (mm)	70	70	70	70	70
Width (mm)	11	15	11	15	20
Thickness (mm)	2.5	2.5	2.5	2.5	3.0
Spacings (mm)	235	235	220	235	235

Fixing to Channels

Fixing to channels is by 'T' head bolts. These are inserted into the channel and turned through 90°. The bolt must then be tightened to the correct torque. Tapped plate washers can be used as an alternative to 'T' bolts where non-standard bolt lengths or diameters are required.

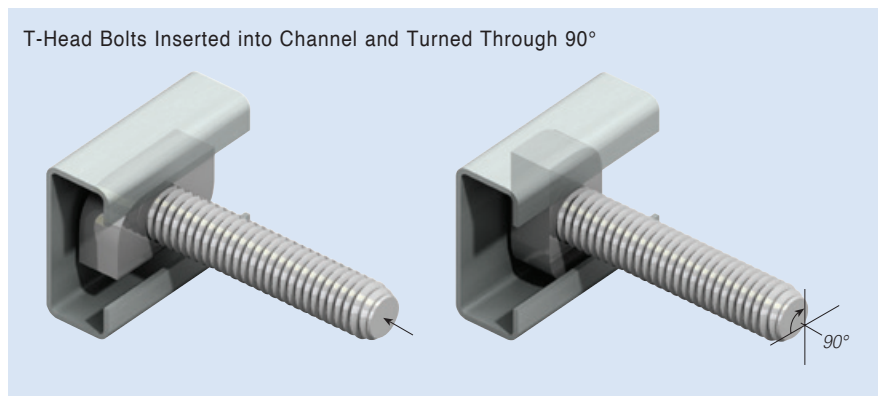


Channel, Bolts and Fixings

Design Resistances

The design resistances are based on channels with standard anchors (page 6), cast into concrete with a strength of C30/37.


Longitudinal loads are achieved by friction using fully-tightened stainless steel or grade 4.6 bolts.

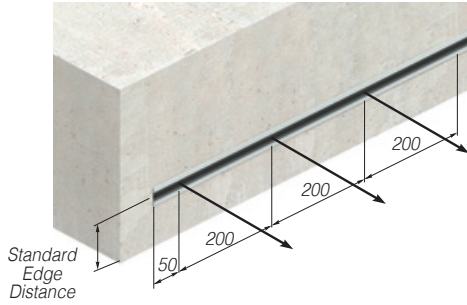

Design Resistances at Standard Edge Distances

Channel Reference	Edge Distance (mm)	Tension (kN)	Shear (kN)	Longitudinal (kN)
28/15	50	5.8	5.8	1.4
38/17*	75	9.5	10.8	2.7
30/20*	75	10.1	10.8	2.7
30/20 CombiDeck	Top	55	8.8	2.7
	Bottom	75		
40/25	100	10.8	13.5	2.7
49/30	150	16.2	18.9	2.7
54/33	160	31.1	31.1	4.1


Note: The above values should be used in conjunction with the appropriate Eurocode safety factors. $\gamma_G=1.35$ $\gamma_Q=1.5$

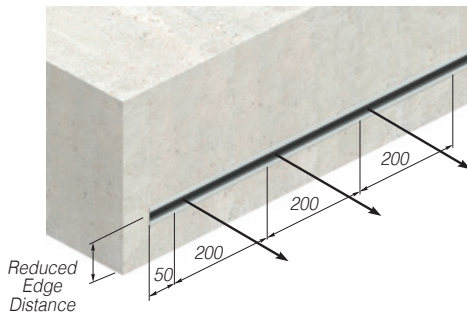

Design Resistances at Reduced Edge Distances

Channel Reference	Edge Distance (mm)	Tension (kN)	Shear (kN)	Longitudinal (kN)
28/15	40	5.4	5.4	1.4
38/17*	60	6.8	8.1	2.7
30/20*	60	8.1	8.1	2.7
40/25	80	10.1	12.2	2.7
49/30	120	13.5	13.5	2.7
54/33	160	31.1	31.1	4.1

Note: The above values should be used in conjunction with the appropriate Eurocode safety factors. $\gamma_G=1.35$ $\gamma_Q=1.5$

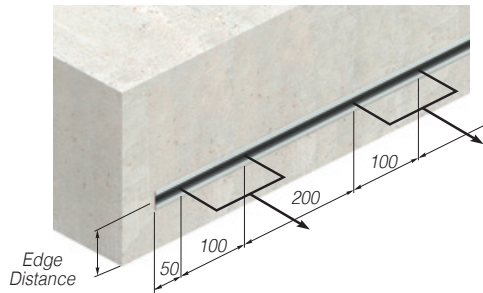


Design Resistances Bolt Pairs

Channel Reference	Edge Distance (mm)	Tension (kN)	Shear (kN)
28/15	50	9.5	9.5
38/17*	75	12.2	12.2
30/20*	75	13.5	16.2
40/25	100	16.2	16.2
49/30	150	20.3	20.3
54/33	160	33.8	33.8

** Longitudinal Load

Note: The above values should be used in conjunction with the appropriate Eurocode safety factors. $\gamma_G=1.35$ $\gamma_Q=1.5$

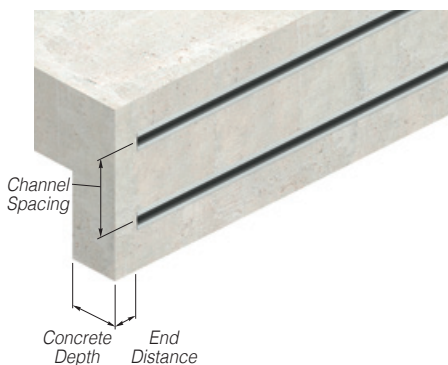

Minimum Channel Position Dimensions

Channel Reference	End Distance (mm)	Spacing (mm)	Concrete Depth (mm)
28/15	50	100	95
38/17*	50	150	95
30/20*	50	150	95
40/25	80	200	100
49/30	130	300	105
54/33	175	320	165

Notes: The design resistances shown in the tables above are for channels using the standard bolts. *Ancon 30/20 should be used in preference to 38/17 channel. 30/20 is a high performance channel and its lower material content offers considerable cost benefits.

Design Example

Cast-in channel with combined tension and shear loads


Design Action Tension	=	3.7kN	
Design Action Shear	=	4.2kN	
Design Resistance Tension	=	10.1kN	
Design Resistance Shear	=	10.8kN	
Resultant Action	=	$\sqrt{3.7^2 + 4.2^2}$	= 5.60kN
Angle	=	$\text{Tan}^{-1} \times (3.7/4.2)$	= 41.38°

Note: Angle greater than 15° therefore compare Resultant Action with Design Resistance Tension.

Proof:

Design Action Tension	≤	Design Resistance Tension	OK
Design Action Shear	≤	Design Resistance Shear	OK
Resultant Action	≤	Design Resistance Tension	OK

Therefore use: 30/20 Cast-in channel with M12 T-head bolts.

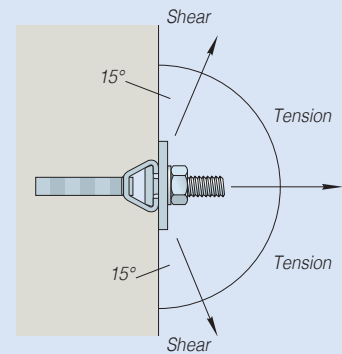

Installation Guidance


Cast-in Channels

Fixing to Timber Formwork

Ancon Cast-in Channels are normally supplied in 3000mm lengths with welded anchors, nail holes, and infill. Incorrect installation is likely to result in expensive remedial work. All nail holes need to be utilised (except with Omega Channel), to prevent excessive ingress of concrete fines between the formwork and the channel during casting.

Both nail holes should be utilised when fixing 21/18 Omega Channel 100mm long to timber formwork. Longer lengths of this channel should be nailed at each end and then fixed at 300mm centres.

Nails with a plain shank should be installed perpendicular to the channel to ensure the easy removal of the formwork and the retention of the channel in the concrete.

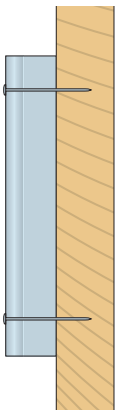

Channel Nailed to Formwork

Fixing to Steel Formwork

Channels can be secured to steel formwork by using standard 'T' head bolts in pre-drilled holes. Where metal deck floors are being used, Ancon CombiDeck has a built-in channel and will replace the standard edge trim.

Welded Fabrications

Where channels with welded anchors are cut on site, it is important to ensure that there is a whole anchor within 50mm from the end of the channel.


Where horizontal cast-in channel is used in conjunction with brickwork support systems, all external corners must incorporate a Welded Corner Fabrication. Release oil must not be applied to either the channel or the anchor.

Minimum Edge Distance

Care should be taken to ensure that the dimensions from the centre of the channel to the edges of the concrete are not less than the minimum edge distance shown on page 8. The channel must be lined and levelled correctly. In every situation, care must be taken to ensure a good fit is obtained between the face of the channel and the formwork.

Removal of Formwork

When the concrete is poured, care should be taken to ensure that it is fully compacted around the back of the channel and especially adjacent to anchors. After the concrete has cured and the formwork is removed, the nails should either be cut off or bent away from any tie or 'T' head bolt.

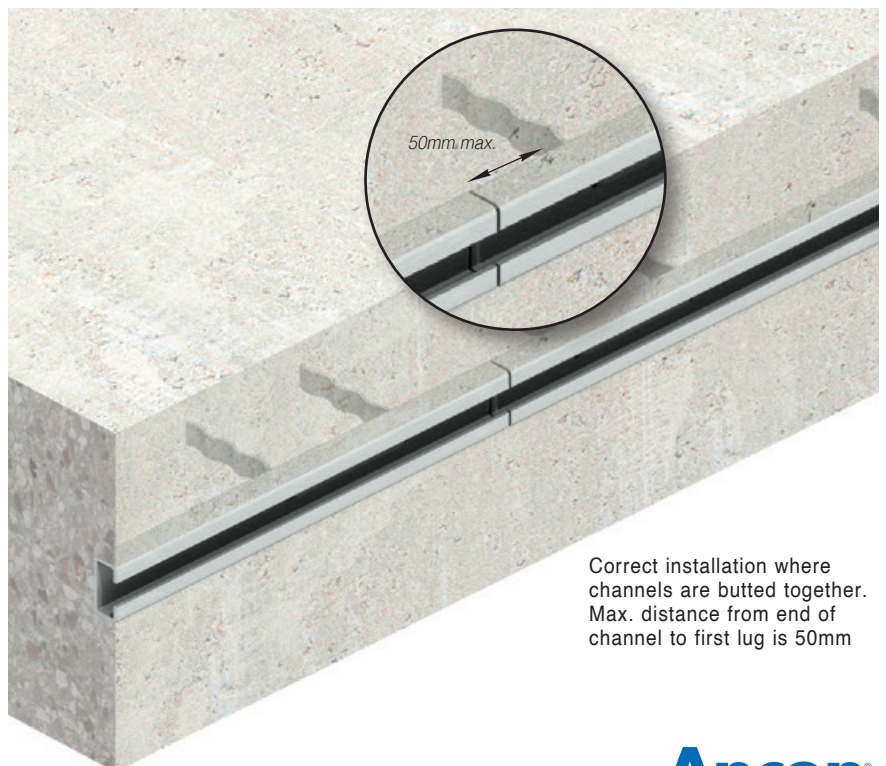

Correct installation where channels are butted together. Max. distance from end of channel to first lug is 50mm

Channel, Bolts and Fixings



Surface-Fixed Channel with Welded Plate Bolted to Concrete

Surface-Fixed Channels

Ancon channels can be supplied with holes for surface fixing to concrete, steelwork and other materials. The design resistance will depend on the fixing centres, the type of fixing and the base material.

Channels are supplied plain-backed for surface fixing to either concrete or steelwork. When bolting channel to concrete or steelwork it is important to utilise all fixing holes (except with 25/14 channels), incorporating the square washer provided and ensuring its correct orientation to achieve the design resistances.

Bolt and washer specifications are shown below and bolts should be installed following the guides on page 13 and 14.



Surface-Fixed Channel Bolted to Concrete



Surface-Fixed Channel Fixed with a T-Head Bolt to Cast-in Channel


Bolt and Washer Specifications

Channel	Bolt Diameter	Washer
28/15	M8	25 x 25 x 3
38/17	M10	30 x 30 x 3
40/25	M12	40 x 40 x 4
49/30	M16	50 x 50 x 5
54/33	M20	50 x 50 x 5

Design Resistances

The design resistances for surface-fixed channels in the table below assume partial fixity ($M=WL/6$) and are limited by either a maximum stress of 240N/mm² or a deflection of span/325.

Design resistances for other spans and/or different end fixity can be calculated using the section properties shown on page 6.

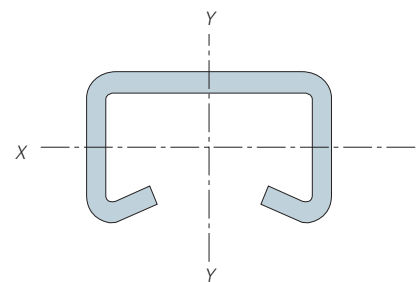


Surface-Fixed Channel References	Fixing Centres (mm)	28/15	38/17	40/25	49/30	54/33
Design Resistances (kN)	150	4.13	7.10	11.20	16.80	32.20
	200	3.10	5.33	9.94	16.80	28.44
	300	2.06	3.55	6.62	11.57	18.96
	450	1.38	2.37	4.42	7.71	12.64
	600	0.98	1.78	3.31	5.78	9.48

Expansion Bolts

FAZ II Plus High Performance Bolts

These are high performance throughbolts manufactured in grade A4 316 (1.4401 or 1.4571) stainless steel. They have double expansion clips that reduce axial and edge spacing and achieve high performance even in cracked concrete.

They fix into a hole which is similar to the diameter of the bolt. This allows the hole to be drilled through the hole in the item to be fixed.



FAZ II Plus Expansion Bolts should be specified in accordance with the design procedures described in ETAG001 Annex C: Design Methods for Anchorages. FAZ II Plus bolts carry a European Technical Approval (ETA-19/0520) and are suitable for use in cracked and non-cracked concrete within the strength class range of C20/25 to C50/60. Design resistances should be calculated for each individual application. For guidance on specific applications please contact Leviat.

Bolt Reference	FAZII Plus 6/10	FAZII Plus 8/10	FAZII Plus 10/10	FAZII Plus 10/30	FAZII Plus 12/30	FAZII Plus 12/50	FAZII Plus 16/25	FAZII Plus 16/50
Thread Size	M6	M8	M10	M10	M12	M12	M16	M16
Overall Length (mm)	65	75	95	115	130	150	148	173
Hole Dia. In Concrete (mm)	6	8	10	10	12	12	16	16
Drill Depth* (mm)	90	105	115	115	145	145	185	185
Hole Dia. In Fixture (mm)	7	9	11	11	13	13	17	17
Min. Embedment (mm)	55	55	75	75	85	85	105	105
Width Across Nut (mm)	10	13	17	17	19	19	24	24
Tightening Torque (Nm)	8	20	45	45	60	60	110	110
Max. Fixing Thickness (mm)	10	10	10	30	30	50	25	50


*Minimum drill depth for throughbolt installation at maximum embedment.

Before Installation


The following checks must be carried out prior to the installation of High Performance Bolts.

- 1 The appropriate length and diameter drill bit is used.
- 2 The correct edge distance and spacing are used in accordance with the design requirements.
- 3 The anchor/fixing is the correct size.
- 4 The correct setting tools are used.


Installation

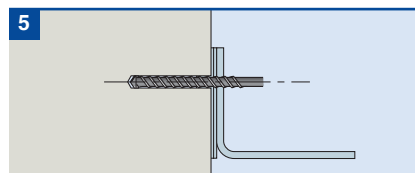

Drill the hole using a hammer drill, through the pre-drilled hole in the fixture, into the concrete. This hole should be drilled perpendicular to the substrate surface, and to the correct diameter and depth. Either plunge the drill bit in and out of the hole three times or use a blow pump to remove any debris.

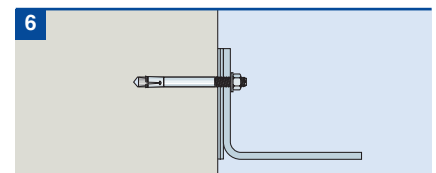


Insert the bolt through the component to be fixed and into the concrete. Add any packing shims that may be required.

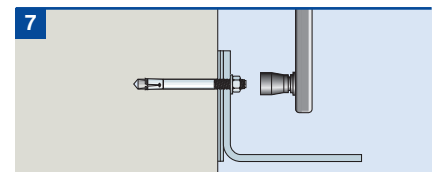

Tighten bolt to the recommended torque.

Channel, Bolts and Fixings



Bonded Anchors

Capsule Anchors

The capsule contains styrene-free vinyl ester resin, quartz granules and a hardener, and provides an expansion-free anchorage for the stainless steel studs. These can be used in a variety of solid materials including concrete, stone and masonry. Resin options are available for cracked and non-cracked concrete.



Anchor Reference	FCS RG M8 x 110	FCS RG M10 x 130	FCS RG M12 x 160	FCS RG M16 x 190	FCS RG M20 x 260
Overall Length (mm)	110	130	160	190	260
Hole Dia. in Concrete (mm)	10	12	14	18	25
Drill Depth* (mm)	80	90	110	125	170
Hole Dia. in Fixture (mm)	9	11	14	18	22
Embedment* (mm)	80	90	110	125	170
Tightening Torque (Nm)	10	20	40	60	120
Max Fixing Thickness (mm)	10	16	21	32	52

* Typical drill hole and embedment depths

Injection Anchors

The cartridge contains a two-part system of vinyl ester resin and hardener which mixes in the nozzle during pumping. The general purpose resin can be used with most materials including concrete, blockwork and brickwork. Resin options are available for both cracked and non-cracked concrete.

For guidance on specific applications please contact Leviat.



Anchor Reference	FIS VL06/ FIS A M6 x 75	FIS VL08/ RG M8 x 110	FIS VL10/ RG M10 x 130	FIS VL12/ RG M12 x 160	FIS VL16/ RG M16 x 190	FIS VL/ RG M20 x 260
Overall Length (mm)	75	110	130	160	190	260
Hole Dia. in Concrete (mm)	8	10	12	14	18	24
Drill Depth* (mm)	66	90	106	131	127	222
Hole Dia. in Fixture (mm)	7	9	11	14	18	22
Embedment* (mm)	50	80	90	110	125	170
Tightening Torque (Nm)	5	10	20	40	60	120
Max Fixing Thickness (mm)	16	10	16	21	32	50

* Typical drill hole and embedment depths

Bonded anchors should be specified in accordance with the design procedures described in EOTA Technical Report TR029: "Design of Bonded Anchors" or "BS EN 1992-4: 2018". Design resistance should be calculated for each individual application. For guidance on specific applications please contact Ancon.

Fixings for Steel Frames

Ancon Steelgrip


Ancon Steelgrip is a high performance fixing, which simplifies the fixing of masonry support systems to hollow steel sections, or other applications where access is only available from one side.

This bolt is only available for use with Ancon systems. It features a serrated washer that corresponds with the serrations on all Ancon brackets. The serrated surfaces interlock, and as the head is tightened to the correct torque the sleeve expands.

The Steelgrip consists of a zinc plated sleeve and cone, and a stainless steel screw and serrated washer.




UK Patent No: 2410307

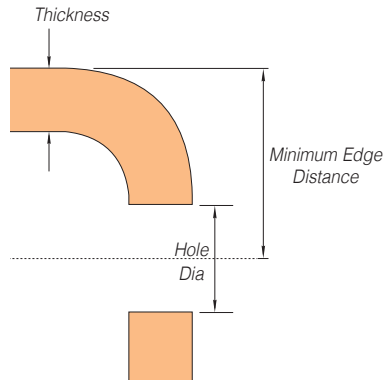

Ancon Steelgrip 12 Min. Edge Distance (mm)

Thickness (mm)	6	8	10	12
Cold Rolled Sections	24	26	28	30
Hot Rolled Sections	24	30	35	46

Note: Minimum spacing 50mm

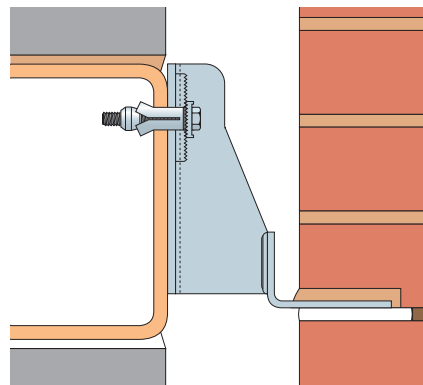

	Thread Size (mm)	Shim Allowance* (mm)	Overall Length (mm)	Resistance Tension (kN)	Resistance Shear (kN)	Steelwork Hole Dia. (mm)	Fixture Hole Dia. (mm)	Bolt Torque (Nm)
Ancon Steelgrip 12	M12	12	70	20.3	13.5	20	20	80

Note: Steelgrip is only for use with Ancon Systems.

*Shim allowance varies depending on steel thickness and bracket type. For more information please contact Leviat.

Design Guidance

The design resistances shown are static loads in either tension or shear, however in many applications the anchor will be subject to a combination of shear and tension. The combined actions must satisfy the following equation:


$$\frac{\text{Design Action Tension}}{1.4 \times \text{Design Resistance Tension}} + \frac{\text{Design Action Shear}}{\text{Design Resistance Shear}} \leq 1.0$$

Before Installation


The following checks must be carried out prior to the installation of Ancon Steelgrip.

- 1 The appropriate diameter drill bit is used.
- 2 The correct edge distance is used in accordance with either the information in the table or that specified on drawings produced by Ancon.
- 3 The correct setting tool is used.


Installation

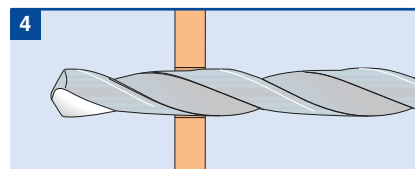

Drill hole to correct size as stated.

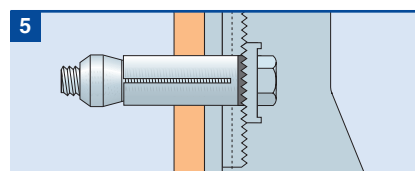


Insert the fixing through the fixture and into the pre-drilled hole ensuring the serrations are the correct orientation to interlock.

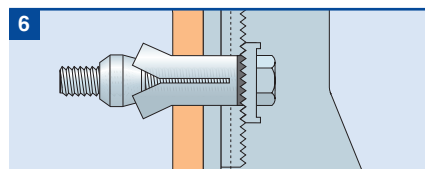

Begin to tighten with torque wrench.

Adjustments to the line and level of the fixture can be made before the bolt has been fully tightened. Fully tighten to the recommended torque.

Channel, Bolts and Fixings

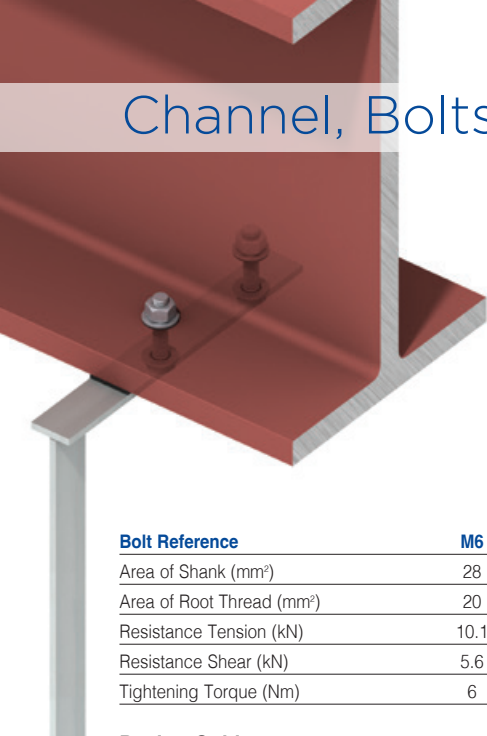

Set Screws

Ancon stainless steel set screws, nuts and washers are available in a range of thread sizes (M6 to M20) and are manufactured from grades A2 (1.4301) and A4 (1.4401) stainless steel, property class 70. Set screws can be shrink-wrapped and are supplied complete with nylon washers to prevent bi-metallic corrosion when fixing to steel.

Bolt Reference	M6	M8	M10	M12	M16	M20
Area of Shank (mm ²)	28	36	58	84	157	245
Area of Root Thread (mm ²)	20	36	58	84	157	245
Resistance Tension (kN)	10.1	18.5	29.2	42.5	79.1	123.5
Resistance Shear (kN)	5.6	10.3	16.2	23.6	44.0	68.6
Tightening Torque (Nm)	6	14	27	48	120	230

Design Guidance

The design resistances above have been calculated in accordance with BS EN 1993-1-8: 2005. The values given make no allowance for prying effects.

The design resistances shown are static loads in either tension or shear, however in many applications the anchor will be subject to a combination of shear and tension. The combined actions must satisfy the following equation:

$$\frac{\text{Design Action Tension}}{1.4 \times \text{Design Resistance Tension}} + \frac{\text{Design Action Shear}}{\text{Design Resistance Shear}} \leq 1.0$$

Self-Drilling Screws

These screws feature a shaped drill tip of hardened steel that allows installation without pre-drilling. They should be fixed using a driver with a speed of around 1800rpm. Drive sockets are available.

High thread screws accommodate insulation between a surface-fixed channel and a steel frame. Also suitable for fixing to timber. Contact Leviat for timber frame applications.



Self-Drilling Screws

	Material Thickness	SDTSS-38-5PT	SDTCS-38-5PT-W	SDTSS-35-2PT	SDTSS-55-2PT
Material		Stainless Steel	Coated Steel	Stainless Steel	Stainless Steel
Diameter (mm)		5.5	5.5	5.5	5.5
Length (mm)		38	38	35	55
Drilling Capacity (mm)		4.0-12.0	4.0-12.0	1.2-3.2	1.2-3.2
Resistance Tension (kN)	1.2mm	-	-	1.16	1.16
	1.4mm	-	-	1.54	1.54
	1.6mm	-	-	1.68	1.68
	1.8mm	-	-	2.09	2.09
	2.0mm	-	-	2.60	2.60
	2.5mm	-	-	3.52	3.52
	3.0mm	-	-	4.10	4.10
	4.0-12.0mm	6.45	8.84	-	-
Resistance Shear (kN)		3.75	4.70	3.75	3.75
Insulation/Material Thickness		0-10mm	0-13mm	0-16mm	0-30mm



High Thread Stainless Steel Screws

	Material Thickness	HTSS-65-2PT-W	HTSS-82-2PT-W	HTSS-100-2PT-W	HTSS-115-2PT-W	HTSS-135-2PT-W	HTSS-150-2PT-W	HTSS-180-2PT-W	HTSS-240-2PT-W
Material		Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Diameter (mm)		5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5
Length (mm)		65	82	100	115	135	150	180	240
Drilling Capacity (mm)		1.2 - 3.2	1.2 - 3.2	1.2 - 3.2	1.2 - 3.2	1.2 - 3.2	1.2 - 3.2	1.2 - 3.2	1.2 - 3.2
Resistance Tension (kN)	1.2mm	1.28	1.28	1.28	1.28	1.28	1.28	1.28	1.28
	1.4mm	1.63	1.63	1.63	1.63	1.63	1.63	1.63	1.63
	1.6mm	1.83	1.83	1.83	1.83	1.83	1.83	1.83	1.83
	1.8mm	2.12	2.12	2.12	2.12	2.12	2.12	2.12	2.12
	2.0mm	2.64	2.64	2.64	2.64	2.64	2.64	2.64	2.64
	2.5mm	3.79	3.79	3.79	3.79	3.79	3.79	3.79	3.79
	3.0mm	4.75	4.75	4.75	4.75	4.75	4.75	4.75	4.75
Resistance Shear (kN)		3.75	3.75	3.75	3.75	3.75	3.75	3.75	3.75
Insulation/Material Thickness		30-46mm	35-61mm	43-79mm	60-94mm	65-114mm	80-129mm	110-159mm	165-220mm
Fixing Centres for 25/14 Channel		450mm	450mm	450mm	450mm	450mm	337.5mm	337.5mm	337.5mm

Notes: A factor of safety of 2 has been applied to ultimate values to determine a design resistance. Fixing centres are those required to provide a Type 3 wall tie performance. See Ancon Wall Tie literature for more information. Contact Leviat for timber frame applications.

Plug and Screw Fixings

The DUOPOWER 8 x 40 plug is a two component plug suitable for fixing to brickwork, blockwork and both cracked and un-cracked concrete.

The Fischer DUOPOWER adjusts itself automatically to the building material and transfers the highest loads through the three product functions of folding, expanding and knotting.

It requires an 8mm diameter hole, 50mm deep into the substrate.

The fixing into the DUOPOWER plug is a stainless steel M6 x 50mm hex head coach screw.

The design resistance will depend on the substrate type.

Please contact Leviat for further information.



Nail Anchor Fixings

The FNAII 6 x 30 M6 A4 nail anchor is a stainless steel, highly corrosion resistant anchor.

Manufactured entirely from non-combustible material, the FNAII is a load-activated expansion anchor designed for rapid installation. The short anchor depth means that clashes with reinforcement are minimised and drill time is reduced. In addition, the optimised expansion clip holds the anchor in place when inserted into the drill hole and prevents it falling out during overhead installation.

The FNA II requires a 6mm diameter hole, 45mm deep for installation and is suitable for fixing into both cracked and un-cracked concrete.

The fixing is simply hammered into place through the fixture and requires no torque to be applied.

Suitable for use with concrete grades of between C20/25 and C50/60, the FNAII has a safe working load of 2.4kN (valid for tensile, shear or oblique loading). For combined load scenarios refer to EN 1992-4.

Please contact us for further information.




CFS Concrete Fixing Screws

CFS screws allow Ancon 25/14 channel to be fixed to concrete through a layer of insulation. Screws are available to accommodate a combined backing board and insulation thickness of up to 267mm. A 6mm pilot hole is required. An Ancon Compression Sleeve is required around the fixing, the same depth as the insulation. More information, including wall tie and screw spacings, is available in Ancon's 25/14 Restraint System datasheet.

Insulation Thickness (mm)	Ancon Screw Reference	Screw Length (mm)	Minimum Concrete Embedment (mm)	Pilot Hole Dia. x Depth (mm)
0	CFS060*	60		
35-45	CFS100	100		
45-55	CFS110	110		
55-65	CFS120	120		
65-75	CFS130	130	50	6 x 60
75-95	CFS150	150		
95-125	CFS180	180		
125-145	CFS200	200		
145-177	CFS212	212		
177-217	CFS252	252	30	6 x 40
217-267	CFS302	302		

Note: Zinc plated carbon steel screws. Supplied with nylon shoulder washers. For use with Ancon stainless steel compression sleeves as part of the 25/14 restraint system when fixing to concrete.

* For fixing channel directly back to concrete where no insulation is present. Shoulder washer & compression sleeve not required, standard M8 nylon washer supplied to be used between screw and channel.

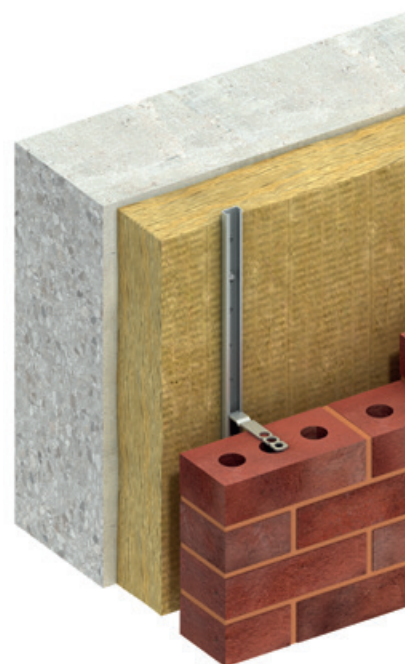

Applications



Student Centre,
LSE, London, UK



Deutsche Bank
Sydney NSW, Australia



Magistrates Court
Mansfield, UK



Retail Development
Buchanon Galleries, Glasgow, UK

Other Ancon Products

Wall Ties and Restraint Fixings

Leviat manufactures Ancon ties in a variety of lengths and types for restraining brickwork, blockwork and stonework. These ties can be fixed to concrete and structural steelwork, as well as any type of masonry.



Masonry Support Systems

Masonry cladding on concrete or steel framed buildings is normally supported by stainless steel masonry support systems. We have developed the most comprehensive range of stainless steel support systems and restraints. Products include AnconOptima, a standard system available from stock. A full design and drawing service accompanies our bespoke support systems.



Tension Systems

The use of tie bars in structures and buildings as an architectural as well as a structural element is increasing. Ancon Tension Systems comprise a range of components which can be supplied in carbon steel or stainless steel in a variety of sizes and finishes. The system looks particularly impressive when used with large areas of glazing or timber trusses.



Shear Load Connectors

Ancon DSD and ESD Shear Load Connectors are used to transfer shear across expansion and contraction joints in concrete. They are more effective than standard dowels at transferring load and allowing movement to take place, and can be used to eliminate double columns at structural movement joints in buildings.



Punching Shear Reinforcement

Used within a slab to provide additional reinforcement around columns, Ancon Shearfix is the ideal solution to the design and construction problems associated with punching shear. The system consists of double-headed studs welded to flat rails, positioned around the column head. The shear load from the slab is transferred through the studs into the column.



Reinforcing Bar Couplers

The use of reinforcing bar couplers can provide significant advantages over lapped joints. Design and construction of the concrete can be simplified and the amount of reinforcement required can be reduced. The Ancon range includes threaded and mechanically bolted couplers.





Leviat[®]
A CRH COMPANY

Innovative engineered products and construction solutions that allow the industry to build safer, stronger and faster.



Worldwide contacts for Leviat:

Australia

Leviat
98 Kurrajong Avenue,
Mount Druitt Sydney, NSW 2770
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leviat
Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Leviat
Industrielaan 2
1740 Ternat
Tel: +32 - 2 - 582 29 45
Email: info.be@leviat.com

China

Leviat
Room 601 Tower D, Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing · P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Leviat
Business Center Šafránková
Šafránková 1238/1
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Leviat
Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

Leviat
6, Rue de Cabanis
FR 31240 L'Union
Toulouse
Tel: +33 - 5 - 34 25 54 82
Email: info.fr@leviat.com

Germany

Leviat
Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

Leviat
309, 3rd Floor, Orion Business Park
Ghodbunder Road, Kapurbawdi,
Thane West, Thane,
Maharashtra 400607
Tel: +91 - 22 2589 2032
Email: info.in@leviat.com

Italy

Leviat
Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

Leviat
28 Jalan Anggerik Mokara 31/59
Kota Kemuning, 40460 Shah Alam
Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Leviat
Oostermaat 3
7623 CS Borne
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

Leviat
2/19 Nuttall Drive, Hillsborough,
Christchurch 8022
Tel: +64 - 3 376 5205
Email: info.nz@leviat.com

Norway

Leviat
Vestre Svanholmen 5
4313 Sandnes
Tel: +47 - 51 82 34 00
Email: info.no@leviat.com

Philippines

Leviat
2933 Regus, Joy Nostalg,
ADB Avenue
Ortigas Center
Pasig City
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

Leviat
Ul. Obornicka 287
60-691 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

Leviat
14 Benoi Crescent
Singapore 629977
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Leviat
Polígono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Leviat
Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Leviat
Grenzstrasse 24
3250 Lyss
Tel: +41 - 31 750 3030
Email: info.ch@leviat.com

United Arab Emirates

Leviat
RA08 TB02, PO Box 17225
JAFZA, Jebel Ali, Dubai
Tel: +971 (0)4 883 4346
Email: info.ae@leviat.com

United Kingdom

Leviat
President Way, President Park,
Sheffield, S4 7UR
Tel: +44 - 114 275 5224
Email: info.uk@leviat.com

United States of America

Leviat
6467 S Falkenburg Rd.
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed

Email: info@leviat.com

Leviat.com

Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.



For more information on these products, contact:

Leviat

President Way
President Park
Sheffield, S4 7UR
United Kingdom

Tel: +44 (0) 114 275 5224

Fax: +44 (0) 114 276 8543

Email: info.ancon.uk@leviat.com

For sales enquiries:

Email: sales.ancon.uk@leviat.com

For technical enquiries:

Email: tech.ancon.uk@leviat.com

Ancon.co.uk

Leviat.com

Imagine. Model. Make.

Leviat.com