

**KNAUF**



# KNAUF PRODUCT BROCHURE

**INTERIORS**



***Build for the world we live in***









# **We recognise the importance of the buildings in which we all live, work and relax.**

We spend 90% of our lives inside buildings, so it is of the utmost importance that the homes we live in, the hospitals where we care for our sick, the schools in which we educate our children and the offices in which business operates are world class, safe, comfortable, sustainable and enjoyable.

The extensive portfolio of products and systems from Knauf UK & Ireland is developed to support that vision.

As a business, we look to the future; building on the knowledge we have acquired with a planned programme of research and development to make sure we continue to keep ahead of current thinking.

Looking to the future also means that our business must be sustainable. We are always conscious of the wider consequences of our actions, both today and tomorrow. We work hard to minimise our impact on the environment and are proud of our recycling, waste reduction and energy efficiency initiatives.

# CONTENTS

<b>GENERAL INFORMATION</b>	<b>5</b>	<b>PASSIVE FIRE PROTECTION</b>	<b>41</b>	<b>AQUAPANEL®</b>	<b>76</b>
Post Brexit Product Conformity	6	Fire Encasement	42	AQUAPANEL® Cement Boards	77
Knauf CE Marking	6	Passive Fire Protection Range	44	AQUAPANEL® Fixings	78
Customer Services	7	<b>JOINTING</b>	<b>45</b>	AQUAPANEL® Accessories	79
Technical Services	8	Powdered Jointing Compounds	46	<b>FLOORING PANELS</b>	<b>81</b>
Training Services	9	Ready-mixed Jointing Compounds	48	Choose the right products for your substrate	82
Design Services	10	Specialist Jointing	50	Dry Screed Floor Panels	83
		Jointing Tapes	50	Acoustic Panels	84
<b>STANDARD AND HIGH PERFORMANCE PLASTERBOARDS</b>	<b>12</b>	Jointing Corner Beads	51	<b>FLOORING ACCESSORIES</b>	<b>86</b>
Standard Plasterboards	13	Jointing Edge Beads	52	Dry Screed Floor Accessories	87
High Performance Plasterboards	15	<b>FINISHING SOLUTIONS</b>	<b>53</b>	<b>GIFAFLOOR ACCESS SYSTEMS</b>	<b>90</b>
Insulating Laminates	23	Ready-mixed Airless Finish	54	Access Frame Systems	91
Plasterboard Accessories	24	Roller Applied Plaster	56	Access Frame Components	92
<b>METAL SECTIONS</b>	<b>26</b>	Ready-mixed Primer	57	<b>APPENDIX</b>	<b>93</b>
Partition Studs	27	<b>ACOUSTIC AND DESIGN</b>	<b>58</b>	Index	94
'U' Channels	29	Choose the right range for your ceiling	59	Notes	98
Shaftwall System	30	Demountable Ceilings – T-grid	60		
'C' Form Ceiling and Wall Lining System	31	Demountable Self-Supporting Ceilings	66		
MF Ceiling System	32	Non-Demountable Ceilings	68		
CD Ceiling and Wall Liner	33	Sound Absorbing Wall Panel	72		
Metal Section Accessories	34	Non-Demountable Ceilings – Accessories	73		
Coated Metal	35	Suspension Systems Summary	74		
<b>FIXINGS AND ACCESSORIES</b>	<b>38</b>	Painting Service	75		
Fixings	39				





## **General Information**

**Our commitment to quality products and great service extends to every contact we have with our customers. That is why we've developed our Product Brochure to be more than numbers on a page.**

**It contains product and service information along with useful contact details.**



# POST BREXIT PRODUCT CONFORMITY

The introduction of UKCA [UK Conformity Assessed] marking is a new UK product marking that will be used for goods being placed on the market of Great Britain. The UKCA marking alone cannot be used for goods placed on the Northern Ireland market, which requires CE marking or UK[NI] marking.

Goods which are affixed with 'CE' marking and meeting obligations of the EU's Construction Product Regulation may still be placed on the UK market until 1st January 2025. From 1st July 2025 'CE' marking will not be recognised in Great Britain for areas covered by government guidance.

However, products bearing the 'CE' marking will still be valid for sale in the UK so long as they are also UKCA marked and compliant with the relevant UK guidance around conformity. Knauf will continue to monitor Government guidelines in respect of product conformity, and introduce legislative changes as they become entrenched in UK law. Any, and all changes will be clearly communicated to all customers of Knauf UK & Ireland.



## KNAUF CE MARKING

From 1 July 2013 the Construction Products Regulation (CPR) came fully into force making it mandatory for products that fall within the scope of a harmonised European standard (hEN) to display CE marking. The CE mark indicates that a particular construction product can be legally placed in European Economic Area (EEA) member states and is based on the principal that the product specification, and therefore the product, is 'fit for purpose'.

All Knauf products affected by the CPR are now fully compliant and CE marked. The example below shows where you can find EN compliance information within this Price List for all products that fall under their scope.

### SUPPORTING YOU WITH CE MARKING QUERIES

More information about the changes in regulation and the implications for the Knauf product range can be found on our website at [www.knauf.co.uk](http://www.knauf.co.uk)

### ALSO AVAILABLE ON THE KNAUF WEBSITE ARE:

---

DOP DOCUMENTS FOR DOWNLOADING

---

CONTACT DETAILS FOR ANY QUERIES

---

SDS DOCUMENTS FOR DOWNLOADING

You can find more details about product compliance underneath the pricing tables within this Price List.



## STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock



## GENERAL INFORMATION

### CUSTOMER SERVICES

We understand that partnerships not transactions drive sustainable business growth.

Commercial excellence is an essential component of our brand experience with every department playing a vital role.

To succeed in a competitive market, we're committed to delight our customers at every single touchpoint, from specifying right through to installation.

We endeavor to;

- Be responsive
- Provide industry leading first time resolution to your enquiries
- On the occasions when things go wrong, we will acknowledge, understand, resolve, and mutually agree an outcome

**29,000+**

Inbound customer calls fielded with a average response time of **13 seconds**

**66,000+**

Inbound email enquiries processed in an average of **2hrs 15mins** of receipt

### OUR RANGE OF SERVICES

**UK 0800 521 050**  
**ROI 01 4620739**

#### ORDER COORDINATION SERVICES

**(option 1)**

✉ Email [cservice@knauf.com](mailto:cservice@knauf.com)

✉ Electronic Data Interchange (EDI) If you wish to trade with us via EDI please contact customer services [cservice@knauf.com](mailto:cservice@knauf.com)

#### AFTERSALES SERVICES

**(option 3)**

✉ Sales, Customer Service and Supply Chain  
Email: [csadmin@knauf.com](mailto:csadmin@knauf.com)

✉ Product Quality  
Email: [stuart.elliott@knauf.com](mailto:stuart.elliott@knauf.com)

#### QUOTATION SERVICES

Please contact your local sales representative or

✉ Email [internalsales@knauf.com](mailto:internalsales@knauf.com)

## GENERAL INFORMATION

### TECHNICAL SERVICES

Average annual number of emails **6,500**

Average annual number of WebChats **3,200**

Average WebChat score **4.6 / 5**

Average WebChat time in queue **<1 minute**

We care about what you do and the outcomes of your building projects. Knauf provide extensive pre-construction, specification and on-site support, assisting at every stage of a project with our market-leading technical and sales support personnel

Our technical services team is always here to help with advice on the best systems for achieving your specified performance criteria.

Speak to our team via the phone, email or webchat:

#### CONTACTS:

Phone: 0800 521 050 (Option 2)

Email: [technical-uk@knauf.com](mailto:technical-uk@knauf.com)

WebChat: [www.knauf.co.uk](http://www.knauf.co.uk)  
Monday – Friday  
09:00 – 17:00  
(excluding Public Holidays)

#### SPECIFICATION SUPPORT

Find your local Project Specification Manager at [www.knauf.co.uk/contact-us](http://www.knauf.co.uk/contact-us)



#### ON-SITE SUPPORT

Find your local Project Technical Manager at [www.knauf.co.uk/contact-us](http://www.knauf.co.uk/contact-us)



Data from 2022



## GENERAL INFORMATION

### TRAINING SERVICES

The Knauf Learning Zones at Immingham and Sittingbourne offer industry leading, CITB approved training courses for the construction industry. We provide in-depth training on a wide variety of Knauf products and systems. Alternatively, if you are looking for a bespoke course, contact us on the details below.

Whether the trainees are already skilled tradespeople, wishing to add to their existing knowledge, or people with no previous experience, there is a course in our range to benefit all.

We believe in future proofing and protecting the workforce. We build for the world we live in.

#### CONTACTS

Contact us to discuss your training needs or to book a course:

Telephone: [01795 424499](tel:01795424499)

Email: [knauftraining@knauf.com](mailto:knauftraining@knauf.com)

Website: [www.knauf.co.uk](http://www.knauf.co.uk)

#### AVAILABLE COURSES:

Drylining – Direct bonding and metal lining systems

Fire protection – Encasement systems

General overview of interior products and systems

Metal stud partitions, shaft wall, wall linings

Metal suspended ceiling systems

Flooring – Brio and GIFA systems

Façades – Steel framing systems

Taping and jointing

Demountable ceiling systems

Drywall for site managers / Quality Control

Airless Spray Finishing



## GENERAL INFORMATION

### DESIGN SERVICES

We want to make specifying our products easy and straightforward for your projects. Knauf Throughwall is a one-manufacturer solution that provides the integral parts of an exterior wall system. It comprises of products from both Knauf and Knauf Insulation.

As part of our offer, we can provide a comprehensive design service and support for our customers. Starting with an indicative SFS design leading to a complete set of elevation design drawings in CAD. Additionally, we can provide thermal calculations for the building based on your specification. Speak to our exterior Business Development Team to discuss how our design service can support you with your project.

#### DESIGN SUPPORT

Find your local Exterior Business Development Manager at [www.knauf.co.uk/contact-us](http://www.knauf.co.uk/contact-us)





**Build for** *the world*  
*we live in*

**HEALTHCARE**

**RESIDENTIAL  
EDUCATION**

**COMMERCIAL**





2.

## **Standard and High Performance Plasterboards**

**Our comprehensive plasterboard range includes products specifically designed for increased resistance to fire, moisture, sound, impact and even X-rays – there's a solution for every environment.**



## STANDARD PLASTERBOARDS

Knauf offers standard plasterboards in a wide range of sizes to meet all basic drylining requirements. Use in conjunction with Knauf jointing compounds, finishes, fixings, plasterboard adhesive and metal systems to receive the Knauf Systems Performance Warranty.

### KNAUF WALLBOARD

Knauf Wallboard is plasterboard with an ivory paper face ideally suited to receive a plaster or ready-mixed finish, or for direct decoration.

#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
9.5	900	1800	243699	✓	100	162.0	1.00
	1200	2400	243690	✓	92	265.0	1.63
12.5	900	1800	243667	✓	80	129.6	1.06
	1200	2400	243643	✓	72	207.4	1.69
		3000	168040	✗	60	216.0	1.77
15.0	1200	2400	168044	✓	60	172.8	1.76

Compliance: BS EN 520, Type A. Material Pricing Group: I3

#### TAPERED EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
9.5	1200	2400	243692	✓	92	265.0	1.63
12.5	900	1800	243668	✓	80	129.6	1.06
	1200	2400	243647	✓	72	207.4	1.69
		2500	243651	✓	72	216.0	1.76
		2700	243657	✓	60	194.4	1.59
		3000	63461	✓	60	216.0	1.77
15.0	900	2400	613382	✓	48	103.7	1.06
	1200	2400	168043	✓	60	172.8	1.76
		2700	243677	✓	48	155.5	1.59
		3000	58260	✓	48	172.8	1.76

Compliance: BS EN 520, Type A. Material Pricing Group: I3

# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## STANDARD PLASTERBOARDS

### KNAUF BASEBOARD

Knauf Baseboard is a handy-sized plasterboard suitable for use as a base for plastering. The board is ideal for patching and repair jobs..

#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
9.5	900	1220	243477	✓	96	105.4	0.65

Compliance: BS EN 520, Type P. Material Pricing Group: 14

### KNAUF PLANK

Knauf Plank is a 19mm thick plasterboard for use as a key component in many partition and floor systems, where it acts as an acoustic mass layer.

#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
19.0	600	2400	243627	✓	80	115.2	1.63

Compliance: BS EN 520, Type A. Material Pricing Group: 15

#### TAPERED EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
19.0	600	2400	81063	✓	80	115.2	1.63

Compliance: BS EN 520, Type A. Material Pricing Group: 15



**FOR THE PERFECT FINISH AND PERFORMANCE, USE WITH KNAUF METAL, FIXINGS, JOINTING AND FINISHING PRODUCTS**



# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## HIGH PERFORMANCE PLASTERBOARDS

Knauf High Performance Plasterboards offer the convenience of Knauf Wallboard, but with significantly higher performance in key areas. The Knauf High Performance Plasterboard range includes solutions for installations requiring enhanced fire, moisture, vapour, sound, impact and X-ray resistance.

### KNAUF VAPOUR PANEL

Knauf Vapour Panel has a metallised polyester foil laminated on the grey paper face, creating an effective vapour barrier.

#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	900	1800	243714	✓	80	129.6	1.06
	1200	2400	243706	✓	72	207.4	1.69

Compliance: BS EN 14190. Wallboard complies to BS EN 520 and is categorised as Type A. Vapour Check Performance: 12.5mm Vapour Panel 78.5 MNs/g. Material Pricing Group: I6

#### TAPERED EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	243708	✓	72	207.4	1.69
12.5	1200	2700	243712	✗	60	194.4	1.59
15.0	1200	2400	243716	✓	60	172.8	1.76

Compliance: BS EN 14190. Wallboard complies to BS EN 520 and is categorised as Type A. Vapour Check Performance: 12.5mm Vapour Panel 78.5 MNs/g. Material Pricing Group: I6

### KNAUF FIRE PANEL

Knauf Fire Panel elevates the fire resistance of a plasterboard. The additives in Knauf Fire Panel make it an ideal board for use in Knauf Performer partitions lining escape routes, Knauf Shaftwall, Knauf MF ceilings systems and structural steel encasement. Easily identifiable by the pink paper face, the boards can be finished with ready-mixed finishes, traditional plaster or direct decoration. Use with the full Knauf metal, jointing and fixing range to ensure performance.

#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	900	1800	613376	✓	64	103.7	1.05
	1200	2400	243481	✓	60	172.8	1.74

Compliance: BS EN 520, Types A and F. Material Pricing Group: P5

#### TAPERED EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	244412	✓	60	172.8	1.74
		2700	243489	✓	60	194.4	1.96
		3000	243493	✓	48	172.8	1.74
15.0	1200	2400	243501	✓	48	138.2	1.67
		2700	243507	✓	48	155.5	1.89
		3000	243513	✓	42	151.2	1.83

Compliance: BS EN 520, Types A and F. Material Pricing Group: P5

#### STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock

# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## HIGH PERFORMANCE PLASTERBOARDS

### KNAUF SOUND PANEL

Knauf Sound Panel offers enhanced levels of sound performance and a greater density, making it ideal for residential applications or where a minimum of 10kg/m<sup>2</sup> is required.

TAPERED EDGE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	404632	✓	32	92.1	0.94
		2700	414141	✗	28	90.7	0.92

Compliance: BS EN 520, Types A and D. Material Pricing Group: I7

### KNAUF SOUNDSHIELD PLUS

Knauf Soundshield Plus is the ideal plasterboard where sound reduction is of particular importance. Its high mass and tuned core give enhanced acoustic performance, excellent fire resistance and severe duty impact rating when used as part of a Knauf Performer, Isolator or Silent Spacesaver partition system. Use with Knauf Performance Plus Screws and the full range of Knauf jointing and finishing products.

TAPERED EDGE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	292622	✓	56	161.2	1.87
		2700	292620	✓	48	155.5	1.81
		3000	292627	✓	42	151.2	1.75
15.0	1200	2400	292646	✓	48	138.2	1.79
		2700	292677	✓	42	136.1	1.76
		3000	292678	✓	36	129.6	1.67

Compliance: BS EN 520, 12.5= Types A and D, 15mm = Types A, D, F and I. Material Pricing Group: I7



USE WITH PERFORMANCE PLUS SCREWS



## HIGH PERFORMANCE PLASTERBOARDS

### KNAUF MOISTURE PANEL

Knauf Moisture Panel has been purpose designed for high performance in internal areas of high humidity such as bathrooms and kitchens. Made with unique additives and paper, the green faced board is fully tested for use with Knauf Performer 'C' Stud Partitions. Use with the full range of Knauf jointing products and finishes. Apply Knauf Betokontakt prior to applying gypsum (not needed for readymix Airless finish).

#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	292680	✓	60	172.8	1.54

Compliance: BS EN 520, Types A and H2. Material Pricing Group: P2

#### TAPERED EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	222210	✓	60	172.8	1.54
		2700	68551	✓	60	194.4	1.73
		3000	243622	✗	54	194.4	1.73
15.0	1200	2400	168091	✓	60	172.8	1.78
		3000	400134	✓	48	172.8	1.78

Compliance: BS EN 520, Types A and H2. Material Pricing Group: P2



**USE WITH KNAUF BETOKONTAKT**

# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## HIGH PERFORMANCE PLASTERBOARDS

### KNAUF CORE BOARD

Knauf Core Board is purpose designed for use in the Knauf Shaftwall System. It has both fire and moisture resistant qualities. When used in conjunction with Knauf CT Stud, the Knauf Shaftwall System can be built from outside the shaft, making the build easier whilst ensuring performance in a critical build area.



#### SQUARE EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
19.0	600	3000	81062	✓	32	57.6	0.94

Compliance: BS EN 520, Types A, D, F, H1, I and R. Material Pricing Group: P6



#### USE WITH KNAUF SHAFTWALL SYSTEM

### KNAUF PERFORMANCE PLUS

Knauf Performance Plus, our highest specification plasterboard, has a high-density core with added performance-enhancing ingredients. The result is a grey faced board with extremely high levels of sound, moisture, fire and impact resistance, ideally suited to schools, hospitals and other large commercial projects. Use with Knauf Performance Plus Screws and apply Knauf Betokontakt before applying gypsum (not required for Airless finish).



#### TAPERED EDGE

DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	400177	✓	60	172.8	2.00
		3000	400185	✓	48	172.8	2.00
15.0	1200	2400	400189	✓	48	138.2	1.79
		3000	400195	✓	36	129.6	1.67

Compliance: BS EN 520, Type A, D, F, H1, I and R. Material Pricing Group: P4



#### USE WITH BETOKONTAKT AND PERFORMANCE PLUS SCREWS

# KNAUF

## AQUAPANEL®

### **Knauf AQUAPANEL® Interior Ceiling System**

is the perfect solution for ceilings exposed to moisture, chlorine and salt.

All components are designed and tested to achieve the highest performance of construction.

**Knauf AQUAPANEL®  
Cement Boards** are water-resistant and made of inorganic materials, which prevents mildew from forming and spreading.

Our suspended ceiling structure features metal components coated to achieve a C5 class for corrosion resistance, making it suitable for indoor areas with high humidity and chemicals.

SCAN HERE  
TO SEE  
MORE





# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## HIGH PERFORMANCE PLASTERBOARDS

### KNAUF FIREBOARD

Knauf Fireboard is a fleece-lined plasterboard available in a wide range of thicknesses to provide up to four hours of fire protection in structural steel encasement.

#### SQUARE EDGE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
15.0	1200	2400	61995	✘	40	115.2	1.48
20.0	1200	1800	61996	✘	40	86.4	1.43
25.0	1200	1800	61997	✘	32	69.1	1.43
30.0	1200	1800	61998	✘	26	56.1	1.43

Compliance: EN 15283-1. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Fireboard, please contact Knauf Customer Services.



**USE WITH KNAUF FIREBOARD SPACHTEL (JOINT FILLER)**

### KNAUF SAFEBOARD **UNIQUE TO KNAUF**

Knauf Safeboard is an X-ray resistant plasterboard with barium sulphate in its core. Installed using the same methods as traditional plasterboard, Knauf Safeboard effectively removes or significantly reduces the amount of lead needed within X-ray shielding partitions whilst simplifying construction and supply chains. Contains no hazardous materials.

#### ROUND TAPERED EDGE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	625	2400	702784	✘	42	63.0	1.14

Compliance: EN 520. Types D and F. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Fireboard, please contact Knauf Customer Services.



**USE WITH KNAUF SAFEBOARD JOINT FILLER**

**SCAN HERE  
TO SEE OUR  
PARTITION  
RANGE**



**SPEAK TO OUR SPECIFICATION AND TECHNICAL  
TEAMS ABOUT IMPROVING THE PERFORMANCE  
OF YOUR NEXT PROJECT USING THESE PRODUCTS**

# KNAUF

## EXPERTS IN WET AREA SOLUTIONS.

### AQUAPANEL®

AQUAPANEL® cement board systems can be used as a render carrier board, tile backer for wall and floor applications, interior ceiling, roof top and internal and external soffit linings.



SCAN HERE  
TO SEE OUR  
BROCHURE



## HIGH PERFORMANCE PLASTERBOARDS

### KNAUF VIDIWALL

Knauf Vidiwall is a gypsum fibreboard manufactured from gypsum and cellulose fibres. This dense, impact resistant sheet material is suitable for all areas of drywall construction where increased durability, rigidity and mechanical strength are required.

#### STEPPED EDGE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	1200	2400	423072 <sup>CF</sup>	✘	40	115.2	1.71
		2700	423072 <sup>CF</sup>	✘	40	129.6	1.93
		3000	423072 <sup>CF</sup>	✘	45	162.0	2.40
15.0	1200	2400	423073 <sup>CF</sup>	✘	35	100.8	1.80
		2700	423073 <sup>CF</sup>	✘	35	113.4	2.02
		3000	423073 <sup>CF</sup>	✘	35	126.0	2.25

Compliance: EN 15283-2. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Vidiwall, please contact Knauf Customer Services. CF not able to order through EDI. Specific product configuration details required. Please contact Knauf Customer Services to order. 'CF' not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.



**USE WITH VIDIWALL SCREWS, SEE PAGE 42**



# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## INSULATING LAMINATES

### KNAUF XPS LAMINATE PLUS

CFC and HCFC-free extruded polystyrene bonded to 9.5mm Knauf Wallboard offers an enhanced thermal performance at a reduced thickness. Ideal for use in refurbishment, new build and warm roof situations where an enhanced level of thermal insulation is required.

TAPERED EDGE

✓✓✓ THERMAL PERFORMANCE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
27	1200	2400	268262	✓	36	103.6	0.72
35	1200	2400	268264	✓	28	80.6	0.59
40	1200	2400	268265	✓	25	72.0	0.54
45	1200	2400	268266	✓	22	63.4	0.48
55	1200	2400	268267	✓	16	46.1	0.37

Compliance BS EN 13950. Material Pricing Group: P7. Thermal Conductivity: 0.033W/mK. MOQ: 1 pallet. Loading Guide: 20 pallets for a full load/10 pallets for a half load on an artic vehicle.\*

# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## PLASTERBOARD ACCESSORIES

Our Plaster Accessories have been developed to perfectly complement our high-quality Knauf Plaster and Ready-mixed Finishes range.

### KNAUF WALLBOARD PRIMER

Knauf Wallboard Primer is a surface treatment that equalises suction across plasterboard joints prior to decoration. Apply with a brush or roller.



TUB SIZE (L)	MATERIAL NO.	EX STOCK	PALLET DETAILS	
			TUBS	TONNES (APPROX.)
12	258279	✓	36	0.54

Material Pricing Group: P9. Shelf life: 9 months. Estimating guide: approximately 133m<sup>2</sup> per tub (one coat). Available in part pallet quantities.

### KNAUF PLASTERBOARD SEALER

Knauf Plasterboard Sealer prevents an uneven finish when decorating. Used for sealing plasterboard and new walls for painting.



TUB SIZE (L)	MATERIAL NO.	EX STOCK	PALLET DETAILS	
			TUBS	TONNES (APPROX.)
5	730293	✓	96	0.6

Compliance: BS EN 14496. Material Pricing Group: P9. Shelf life: 9 months. Estimating guide: 65m<sup>2</sup> per tub. Available as part pallet quantities.

### KNAUF PLASTERBOARD ADHESIVE (BONDING COMPOUND)

A multi-purpose gypsum-based adhesive used to direct bond Knauf Plasterboards and Knauf Insulating Laminates to masonry surfaces.

Note: For backgrounds that either have high suction or low suction, use Knauf High Suction Plasterboard Primer or Knauf Betokontakt respectively. See **p 58**.



BAG SIZE (kg)	MATERIAL NO.	EX STOCK	PALLET DETAILS	
			BAGS	TONNES (APPROX.)
25	258166	✓	60	1.50

Compliance: BS EN 14496. Material Pricing Group: PB. Shelf life: 4 months. Estimating guide: 4.6m<sup>2</sup> per bag (dot and dab).

# STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

## PLASTERBOARD ACCESSORIES

### KNAUF COVE

Decorative plaster moulding with a paper face for direct application of paint finishes.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS		
WIDTH	LENGTH			PACKS PER PALLET	LENGTHS PER PACK	TONNES (APPROX.)
127	3000	258395	✓	40	5	0.56
	3600	258399	✓	50	5	0.84
90	3000	258397	✓	39	7	1.06

Orders must be placed for whole packs. Compliance BS EN 14209. Material Pricing Group: PC

### KNAUF COVE ADHESIVE

Gypsum-based adhesive to affix Knauf Cove. One bag is sufficient to fix 18–24 linear metres of cove.



CARTRIDGE SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
5	258171	✓	180	0.9

Shelf life: 4 months. Compliance: BS EN 14496. Available as part pallet. Material Pricing Group: PC

### RELATED PRODUCTS

Knauf Intumescent and Acoustic Mastic: See **p 44**. Putty Pads: See **p 44**.





**3.**

## **Metal Sections**

**Combining maximum performance with minimum fuss, Knauf Metal Sections are easy to install in any interior. They are manufactured using high quality steel and are available in a wide range of sizes.**


## METAL SECTIONS

### PARTITION STUDS

Knauf 'C' Studs, Acoustic 'C' Studs, 'I' Studs and 'MW' Studs are the essential components for creating a number of Knauf partition systems. When used with Knauf 'U' Channels these partition studs can be used to achieve a wide range of performance criteria and varying partition heights.

#### KNAUF 'C' STUDS

Galvanised lightweight steel section for use in non-load-bearing Knauf partition systems.




DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS		
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)	
0.55	50	2400	35	243861	✓	10	14	
		2500	35	243863	✗	10	15	
		2700	35	243865	✓	10	15	
		3000	35	243869	✓	10	17	
		3600	35	243870	✓	10	21	
		3000	35	243876	✓	10	18	
	60	3600	35	243877	✗	10	22	
		70	2400	35	243880	✓	10	16
			2700	35	243887	✓	10	18
			3000	35	243889	✓	10	20
	92	3600	35	243898	✓	10	24	
			35	243909	✓	10	28	
		4200	35	243923	✓	10	26	
			35	243930	✓	10	31	
	146	2700	35	243847	✗	10	27	
			35	243848	✗	10	30	
35			243849	✗	10	35		
35			243851	✓	10	41		
35			243917	✗	10	30		
0.7	70	4200	35	243919	✗	10	35	
		92	3600	35	243933	✗	10	34
	4200		35	243935	✗	10	40	
	4200		35	243858	✗	10	53	

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> partition (based on 600mm centres). Material Pricing Group: PE

#### KNAUF ACOUSTIC 'C' STUDS

Galvanised lightweight steel section for use in non-load-bearing Knauf partition systems, specifically designed to improve the acoustic performance of the resulting partition.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.6	50	2400	50	243820	✗	10	15
		2700	50	243821	✗	10	16
		3000	50	243823	✓	10	17
	70	2400	50	243824	✗	10	18
		3000	50	243826	✗	10	22
		3600	50	243829	✓	10	26
		4200	50	243839	✓	10	30


Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> partition (based on 600mm centres). Material Pricing Group: PE

## METAL SECTIONS

### PARTITION STUDS

#### KNAUF 'I' STUDS

High-quality galvanised lightweight steel sections for use in non-load-bearing Knauf partition system to achieve greater maximum heights than Knauf C Studs. I Studs can also be used as part of a Knauf Independent I Stud Lining system.




DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.55	50	2700	40	243944	✓	10	21
		3000	40	243947	✓	10	23
	60	3600	40	243952	✓	10	34
		4200	40	243954	✗	10	40
0.7	60	3600	40	449759	✗	10	43
		4200	40	449712	✗	10	51
	70	3600	40	243958	✓	10	39
		4200	40	243963	✓	10	46
0.9	92	5000	40	243973	✓	10	77
		6000	40	243974	✓	10	93
	146	6000	40	243941	✗	10	116

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> partition (based on 600mm centres). Material Pricing Group: PF

#### KNAUF 'MW' STUD

Galvanised lightweight steel section for use in non-load-bearing Knauf partition systems where increased acoustic performance is required.




DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.6	100	3000	50	38697	✗	8	23

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> partition (based on 600mm centres). Material Pricing Group: PE

#### KNAUF STAGGERED STUD CLIP

Spacer used to locate Knauf 'I' Studs in Knauf Silent Spacesaver partition systems. For use with Knauf 'I' Studs.



DIMENSIONS (mm)					MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	STUD SIZE	LENGTH	WIDTH	DEPTH			ITEMS/PACK	kg (APPROX.)
0.55	60	38	10	30	258332	✗	100	1.3
0.9	92	38	54	30	258331	✗	100	2.5

Compliance: BS EN 14195. Estimating Guide: 3.3 clips per linear metre of partition (based on 300mm staggered centres). Material Pricing Group: PF

#### KNAUF RESILIENT BAR

Robust Detail compliant resilient metal section which is fixed to floors and partitions to reduce direct sound transmission. Knauf Resilient Bar can be used in any Robust Detail where it states that a resilient bar must be used.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	HEIGHT			LENGTHS/PACK	kg (APPROX.)
0.55	50	3000	15	156828	✓	10	11

Compliance: BS EN 14195. Material Pricing Group: PO




# METAL SECTIONS

## PARTITION 'U' CHANNELS

### 'U' CHANNELS

Galvanised steel section for use as the standard head and floor track. For use in Knauf partitions and wall linings.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.55	52	3000	25	243994	✓	10	13
	62	3000	25	243995	✓	10	14
	72	3000	25	243996	✓	10	16
	94	3000	25	243997	✓	10	18
	148	3000	25	243993	✓	10	25

Compliance: BS EN 14195. Estimating Guide: 2 linear metres per metre run of partition, head and floor track. Material Pricing Group: PE

### KNAUF DEEP FLANGE 'U' CHANNEL / 50mm DEEP FLANGE

Galvanised steel section for use as an optional head track where increased deflection is expected. For our new, innovative Deflection Head Fire Seal please see **p 44**.

\*For use in Knauf partition systems.




DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.60	52	3000	50	243999	✓	10	25
	72	3000	50	255951	✓	10	27

Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of partition, head track only. Material Pricing Group: PE

### KNAUF DEEP FLANGE 'U' CHANNEL / 70mm DEEP FLANGE

Galvanised steel section for use as an optional head track where increased deflection is expected. For our new, innovative Deflection Head Fire Seal please see **p 44**.

\*For use in Knauf partition systems.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.70	52	3000	70	244000	✓	10	32
	62	3000	70	255950	✓	10	33
	72	3000	70	255953	✓	10	35
	94	3000	70	255955	✓	10	39
	148	3000	70	243998	✓	10	47

Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of partition, head track only. Material Pricing Group: PE

### KNAUF 'UW' CHANNEL

Galvanised steel section for use as the standard head and floor track. For use with Knauf 'MW' Stud partitions.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.60	102	4000	40	3378	✗	8	14

Compliance: EN 14195. Estimating Guide: 2 linear metres per metre run of partition, head and floor track. Material Pricing Group: PE

\* Use of Knauf Deflection Head Fire Seal is dependent on the amount deflection needed. Please refer to **p 71** for more details.

#### STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock

## SHAFTWALL SYSTEM


Knauf Shaftwall systems offer economic solutions to provide non-load-bearing lift or stair enclosures, utilising a lightweight framework built from one side.



### USE WITH KNAUF CORE BOARD

### KNAUF 'C-T' STUD

Unique galvanised steel section used in the Knauf Shaftwall system to allow quick and safe construction from one side with the minimum number of components.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.92	60	3000	38.5	243804	✓	10	42
		4500	38.5	243811	✓	10	63
	92	4500	38.5	243818	✓	10	73
		5500	38.5	243819	✗	10	89
	146	5500	38.5	243801	✓	10	110
		6500	38.5	243802	✗	10	130

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> of Shaftwall (based on 600mm centres). Material Pricing Group: PN

### KNAUF 'J' CHANNEL

High-quality galvanised steel section used as head and floor track and perimeter framing section of the Knauf Shaftwall system.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.92	62	3000	30/60	243977	✓	10	32
		4500	30/60	243983	✓	10	49
	94	4500	30/60	243988	✓	10	59
		5500	30/60	243989	✓	10	72
	148	5500	30/60	243975	✓	10	93
		6500	30/60	243976	✓	10	110

Compliance: BS EN 14195. Estimating Guide: 2 linear metres per metre run of Shaftwall, head and floor track. Material Pricing Group: PN

### KNAUF CORE BOARD CHANNEL

High-quality galvanised steel section used to provide fixing for horizontal Knauf Core Board joints to ensure fire protection of the Knauf Shaftwall system.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.55	20	3600	10/20	243799	✓	10	8


Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of Shaftwall. Material Pricing Group: PN

## METAL SECTIONS

# WALL AND SOFFIT LINING SYSTEMS

### KNAUF 'C' CHANNEL

Galvanised lightweight steel section for use in Knauf wall lining systems and Knauf C-Form Ceiling Systems.




DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
47	2400	17	243792	✗	10	11
	2700	17	243795	✓	10	12
	3000	17	70887	✓	10	13
	4000	17	70889	✓	10	18

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> of wall lining (based on 600mm centres). Material Pricing Group: PG

### KNAUF CHANNEL INTERSECTION CONNECTOR

Locates primary and secondary channels in the Knauf C-Form Ceiling Systems.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
A	B			ITEMS/PACK	kg (APPROX.)
36	49	258298	✓	100	2

Compliance: BS EN 14195. Estimating Guide: 1.1 Connectors per m<sup>2</sup> of C-Form ceiling. Material Pricing Group: PG

### KNAUF 'C' CHANNEL CONNECTOR

Used to join two sections of Knauf 'C' Channel in Knauf C-Form Ceiling Systems.




DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
WEBB	FLANGE	WIDTH			ITEMS/PACK	kg (APPROX.)
45	15	98	258296	✓	100	3

Compliance: BS EN 14195. Material Pricing Group: PG

### KNAUF 'U' CHANNEL – PERIMETER SUPPORT

Galvanised steel section for use as standard head and floor track for Knauf Wall Liner system and as perimeter channel for Knauf C-Form Ceiling Systems.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.55	20	3000	20/30	255956	✓	10	9

Compliance: BS EN 14195. Estimating Guide: 2 linear metres per metre run of wall liner. 1 linear metre per linear metre of perimeter for ceiling systems. Material Pricing Group: PE

### KNAUF UNIVERSAL BRACKET

Supplied flat, the Knauf Universal Bracket locates the Knauf 'C' Channel to the background support. Can be separated to form 2x single channel hangers. For use in Knauf Wall Liner and C-Form Ceiling Systems.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
WEBB	FLANGE			ITEMS/PACK	kg (APPROX.)
46	127	258291	✓	100	7

Compliance: BS EN 14195. Estimating Guide: Fix at 900mm vertical centres for wall lining. 0.7 hangers per m<sup>2</sup> of ceiling: C-Form. Material Pricing Group: PG

### KNAUF SOFFIT CLEAT

Cleat to connect ceiling system to the structural soffit of the building. Pre-drilled to take the required fixings.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
				ITEMS/PACK	kg (APPROX.)
25 x 25		258329	✗	100	2

Compliance: BS EN 14195. Material Pricing Group: PG

NOTE: for Strap Hanger, please see p 33

#### STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock



## METAL SECTIONS

### MF CEILING SYSTEM

#### KNAUF MF CONNECTING CLIP

Secures the Knauf MF Ceiling Channel to the Knauf MF Primary Support Channel.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE				ITEMS/PACK	kg (APPROX.)
2.65		258294	✘	200	2

Compliance: EN 14195. Material Pricing Group: PG

#### KNAUF MF CEILING CHANNEL

Galvanised steel main channel section for the Knauf MF Ceiling system to which the Knauf Plasterboard is fixed. Always fix the board using Knauf Drywall Screws.




DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	LENGTH	DEPTH	WIDTH			LENGTHS/PACK	kg (APPROX.)
0.55	3600	26	80	243990	✔	50	97

Compliance: EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> of ceiling (based on 600mm centres with 15mm plasterboard). Material Pricing Group: PG

#### KNAUF MF PERIMETER CHANNEL

Galvanised steel section to be used around the perimeter of Knauf MF Ceiling systems.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.55	27	3600	20/30	243991	✔	20	22

Compliance: EN 14195. Estimating Guide: 1 linear metre per linear metre of perimeter for ceiling systems. Material Pricing Group: PG

#### KNAUF MF PRIMARY SUPPORT CHANNEL

Galvanised steel section to be used as the main cross-section and hanger support section of the Knauf MF Ceiling system.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.80	45	3600	15	258292	✔	20	34

Compliance: EN 14195. Estimating Guide: 0.83 linear metres per m<sup>2</sup> of ceiling (for single or double layered systems). Material Pricing Group: PG

#### KNAUF MF NUT AND BOLT

Nut and bolt for fixing strap hanger to the soffit cleat.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
DIAMETER				ITEMS/PACK	kg (APPROX.)
6		258293	✘	200	3

Material Pricing Group: PG

#### KNAUF STRAP HANGER

Suspension strap to support Knauf C-Form and Knauf MF Ceiling systems, this product connects to the soffit cleat and can be simply cut to the length required for ease of installation.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	LENGTH	WIDTH			ITEMS/PACK	kg (APPROX.)
0.55	25000	25	258287	✘	-	-

Compliance: EN 14195. Material Pricing Group: PG

## METAL SECTIONS

# CD CEILING AND WALL LINER

## KNAUF CD 'U' MOUNTING BRACKET

Locates Knauf CD Channel to background support. Supplied with 35mm self-tapping fixing screws.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
SIZE/WEBB	FLANGE	LENGTH			ITEMS/PACK	kg (APPROX.)
53	30	125	258290	✘	100	7

Compliance: EN 13964. Material Pricing Group: PG

## KNAUF CD 'C' CHANNEL

Galvanised lightweight steel section for use as a primary and secondary support channel for Knauf CD and Wall Liner systems.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	FLANGE	LENGTH			LENGTHS/PACK	kg (APPROX.)
0.55	60	27	3000	243790	✘	10	21

Compliance: EN 13964. Material Pricing Group: PG

## KNAUF CD 'U' CHANNEL

Galvanised steel section for use with the Knauf CD Ceiling and Wall Liner systems.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE/WEBB	FLANGE	LENGTH			LENGTHS/PACK	kg (APPROX.)
0.55	30	27	3000	322589	✘	10	21

Compliance: EN 13964. Material Pricing Group: PG

## KNAUF CD CHANNEL HANGER

Locates into the primary support channel in the Knauf CD Ceiling system.




DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	WIDTH			ITEMS/PACK	kg (APPROX.)
90	58.5	258292	✘	100	4

Compliance: EN 13964. Material Pricing Group: PG

## KNAUF CD CHANNEL INTERSECTION CONNECTOR

Connects primary and secondary channels in the Knauf CD Ceiling system.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
A	B			ITEMS/PACK	kg (APPROX.)
58	62	258297	✘	100	5

Compliance: EN 13964. Material Pricing Group: PG

## KNAUF CD 'C' CHANNEL CONNECTOR

Used to extend Knauf CD Channel.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
SIZE/WEBB	FLANGE	LENGTH			ITEMS/PACK	kg (APPROX.)
58.5	25	80	258295	✘	100	10

Compliance: EN 13964. Material Pricing Group: PG

## METAL SECTIONS

### METAL SECTION ACCESSORIES

#### KNAUF DRYWALL MOVEMENT CONTROL JOINT

Aluminium section used to bridge gaps left for expansion and contraction in drywall partitions. Please note: it is not suitable as a central joint for internal plastering.




DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	LENGTH			LENGTHS/PACK	kg (APPROX.)
60	3048	258335	✓	10	4

Compliance: BS EN 13658. Material Pricing Group: P9

#### KNAUF FLAT FIXING PLATE

Lightweight galvanised steel fixing plate for use within partitions, wall linings and ceilings. Used as a part of a deflection head as well as to improve rigidity or for horizontal board joints where required.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE	LENGTH			LENGTHS/PACK	kg (APPROX.)
0.70	70	2400	258300	✓	10	12

Compliance: BS EN 14195. Material Pricing Group: PO

#### KNAUF FIXING CHANNEL

Lightweight galvanised steel fixing plate with flanges for additional rigidity over the flat fixing plate, for use with partitions and wall linings.




DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
0.70	96	2400	9.5	258299	✗	10	16

Compliance: BS EN 14195. Material Pricing Group: PO

#### KNAUF ANGLE SECTIONS

Galvanised mild steel angles for use with partitions, column and beam encasements and suspended ceilings.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE	LENGTH	ANGLE (DEG°)			LENGTHS/PACK	kg (APPROX.)
0.70	25 x 25	3000	90	258285	✓	10	11
0.70	25 x 50	3000	90	258286	✓	10	16

Compliance: BS EN 14195. Material Pricing Group: PO

#### KNAUF FIXING CLIP

Part of the Knauf Encasement system.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	HEIGHT			ITEMS/PACK	kg (APPROX.)
45	28	258330	✓	50	2

Compliance: BS EN 14195. Estimating Guide: 4 clips per linear metre of column. 2 clips per linear metre of beam. Material Pricing Group: PO



# COATED METAL SECTIONS - CEILINGS

## COATED METAL

Forming part of the Aquapanel interior ceiling system these C3 and C5 corrosion resistant profiles are ideal for use in wet areas, from swimming pools and spas through to bathrooms, wet rooms and communal showers. Used as part of a complete AQUAPANEL® Interior Ceiling System that prevents damage from water, chlorine and salt, and provides perfect protection from moisture and mildew.

### KNAUF COATED 'C' CHANNEL

Coated steel section for use as support channel for Knauf AQUAPANEL® Ceiling system.



COATING	DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
	GAUGE	SIZE/WEBB	LENGTH	FLANGE			ITEMS/PACK	kg (APPROX.)
C3	0.60	60	4000	27	57983	✘	12	27
C3	0.60	60	cut to order	27	322198 <sup>CF</sup>	✘	12	–
C5	0.60	60	4000	27	322196	✘	12	27
C5	0.60	60	cut to order	27	322197 <sup>CF</sup>	✘	12	–

Compliance: EN 13964:2014 Material Pricing Group: PG

<sup>CF</sup> not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.

### KNAUF COATED 'U' CHANNEL

Coated steel section for use as perimeter channel in Knauf AQUAPANEL® Ceiling system.



COATING	DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
	GAUGE	SIZE/WEBB	LENGTH	FLANGE			ITEMS/PACK	kg (APPROX.)
C3	0.60	28	3000	27	59877	✘	16	18
C5	0.60	28	3000	27	322228	✘	16	18

Compliance: EN 13964:2014. Material Pricing Group: PG

### KNAUF COATED 'C' CHANNEL INTERSECTION CONNECTOR

Connects primary and secondary channels in the Knauf AQUAPANEL® Ceiling system.



COATING	MATERIAL NO.	EX STOCK	PACK DETAILS	
			ITEMS/PACK	kg (APPROX.)
C3	157014	✘	50	2
C5	322206	✘	50	2

Compliance: EN 13964:2014. Material Pricing Group: PO

### KNAUF COATED 'C' CHANNEL CONNECTOR

Connects base and support profiles in the Knauf AQUAPANEL® Ceiling system.



COATING	MATERIAL NO.	EX STOCK	PACK DETAILS	
			ITEMS/PACK	kg (APPROX.)
C3	466068	✘	50	2.3
C5	324008	✘	50	2.3

Compliance: EN 13964:2014. Material Pricing Group: PO

### KNAUF COATED 'U' MOUNTING BRACKET

Locates Knauf 'C' Channel to background support.



COATING	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
	SIZE/WEBB	LENGTH	FLANGE			ITEMS/PACK	kg (APPROX.)
C3	60	120	27	322021	✘	50	3
C3	60	200	27	323977	✘	50	4
C5	60	120	27	322018	✘	50	3
C5	60	200	27	323996	✘	50	4

Compliance: EN 13964:2014. Material Pricing Group: PO

#### STOCK AVAILABILITY


- ✓ Indicates that products are available ex-stock
- ✘ Indicates that products may not be available for immediate delivery ex-stock

# METAL SECTIONS

## COATED METAL

### KNAUF COATED NONIUS TOP

Coated suspending brackets for use in Knauf AQUAPANEL® Ceiling system.



COATING	DIMENSIONS (mm)	MATERIAL NO.	EX STOCK	PACK DETAILS	
	A			ITEMS/PACK	kg (APPROX.)
C3	147.5	785365	✗	50	1.7
C3	245.0	785369	✗	50	2.5
C3	342.5	785368	✗	50	3.3
C3	440.0	787799	✗	50	4.2
C3	537.5	785367	✗	50	4.9
C3	635.0	785370	✗	50	5.8
C3	732.5	785408	✗	50	6.8
C3	830.0	785410	✗	50	7.8
C3	927.5	785412	✗	50	8.7
C3	1122.5	785413	✗	50	10.5
C3	1415.0	785414	✗	50	13.1
C3	1707.5	785415	✗	50	15.0
C5	147.5	785711	✗	50	1.7
C5	245.0	785886	✗	50	2.5
C5	342.5	785885	✗	50	3.3
C5	440.0	785343	✗	50	4.2
C5	537.5	785887	✗	50	4.9
C5	635.0	785888	✗	50	5.8
C5	732.5	785889	✗	50	6.8
C5	830.0	785890	✗	50	7.8
C5	927.5	785695	✗	50	8.7
C5	1122.5	785696	✗	50	10.5
C5	1415.0	785891	✗	50	13.1
C5	1707.5	785892	✗	50	15.0

Compliance: EN 13964:2014. Material Pricing Group: PO

### KNAUF COATED NONIUS HANGER

Coated suspending brackets for use in Knauf AQUAPANEL® Ceiling system.



COATING	DIMENSIONS (mm)	MATERIAL NO.	EX STOCK	PACK DETAILS	
	LENGTH			ITEMS/PACK	kg (APPROX.)
C3	100	157088	✗	50	2
C5	100	322195	✗	50	2

Compliance: EN 13964:2014. Material Pricing Group: PO

### KNAUF NONIUS CLIP

Clip for use in combination with the Knauf Coated Nonius Top for adjustment of ceiling heights. Any scratches on the coated clips must be coated with Corrosion Resistant Paint when installed. The non-coated clips must be fully coated with Corrosion Resistant Paint when installed.



COATING	MATERIAL NO.	EX STOCK	PACK DETAILS	
			ITEMS/PACK	kg (APPROX.)
C3	591247	✗	100	0.7
C5	591249	✗	100	0.7

Compliance: EN 13964:2014. Material Pricing Group: PO

Note: For delivery lead times for Coated Metal, please contact Knauf Customer Services.

## METAL SECTIONS

### COATED METAL

#### KNAUF COATED METAL HANGER TO PROFILE SCREW LN 3.9 11

Secure Knauf Coated Nonius Hanger to Knauf Coated 'C' Channel. Screws must be fully coated with Corrosion Resistant Paint when installed.



MATERIAL NO.	EX STOCK	PACK DETAILS	
		ITEMS/PACK	kg (APPROX.)
46175	×	1000	1.37

Compliance: EN 13964:2014. Material Pricing Group: PO

#### CORROSION RESISTANT PAINT

Corrosion resistant paint for use in the Knauf AQUAPANEL® Interior and Exterior Ceiling Systems. Any scratched or uncoated metal and all Blackstar screws must be coated with Corrosion Resistant Paint when installed.



TUB SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
LITRES			ITEMS/PACK	kg (APPROX.)
0.75	64776	×	6	5

Material Pricing Group: PO

Note: For delivery lead times for Coated Metal, please contact Knauf Customer Services.

#### STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock



A modern office interior featuring glass partitions, recessed ceiling lights, and a person working at a desk. The scene is captured from a low angle, emphasizing the height of the ceiling and the sleek design of the office space. The lighting is soft and even, highlighting the clean lines and materials of the environment.

4.

## Fixings and Accessories

**Well made and expertly crafted, our fully warranted accessories guarantee consistent quality across the Knauf range. Designed with compatibility, endurance and optimum performance in mind.**

## FIXINGS

### KNAUF DRYWALL SCREWS – SELF TAPPING

Self-tapping black phosphate screws with countersunk Ph2 heads for fixing plasterboards to metal framing. Ideal for use with light gauge metal up to 0.7mm thick. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS/PACK	kg (APPROX.)
25	3.5	258309	✓	1000	1.5
32	3.5	258310	✓	1000	1.8
38	3.5	258311	✓	1000	2.1
42	3.5	258312	✓	1000	2.5
50	3.9	258313	✓	500	1.8
60	4.2	258314	✓	500	2.0
75	4.2	258315	✓	500	3.0

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

### KNAUF COLLATED DRYWALL SCREWS – SELF TAPPING

Strips of 50 collated black phosphate, self-tapping screws with countersunk Ph2 heads for fixing plasterboards to metal framing. Ideal for use with light gauge metal up to 0.7mm thick. Head stamped with KF for ease of identification.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS/PACK	kg (APPROX.)
25	3.5	158103	✓	1000	1.9
35	3.5	158106	✓	1000	2.0
45	3.5	322296	✓	1000	2.7

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

### KNAUF DRYWALL SCREWS – JACKPOINT SELF DRILLING

Self-drilling black phosphate screws with countersunk Ph2 heads for fixing plasterboard to metal frame 0.7mm to 1.2mm thick. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS/PACK	kg (APPROX.)
25	3.5	258318	✓	1000	1.6
35	3.5	258319	✓	1000	2.1
42	3.5	258320	✓	1000	2.4
55	3.5	258321	✓	1000	3.7

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

### KNAUF DRYWALL WOOD SCREWS

Self-tapping black phosphate coarse threaded wood screws with countersunk Ph2 heads for fixing plasterboard to timber frames. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS/PACK	kg (APPROX.)
38	3.5	258316	✓	1000	2.1
42	3.5	258317	✓	1000	2.5
50	3.9	656081	✓	500	1.5
65	4.1	656080	✓	500	2.1

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD



**USE KNAUF FIXINGS FOR 100% SYSTEM PERFORMANCE WARRANTY. GENUINE KNAUF FIXINGS HAVE A KF HEAD STAMP.**

## FIXINGS

### KNAUF VIDIWALL SCREWS

Knauf Vidiwall Screws are designed for single and double layer Knauf Vidiwall partition systems. Knauf Vidiwall Screws provide a solid fix into dense gypsum fibreboards.

DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS/PACK	kg (APPROX.)
30	3.5	339277	✘	1000	1.71
45	3.5	339276	✘	1000	2.52

Compliance EN 14566. Material Pricing Group: PD





**5.**

## **Passive Fire Protection**

**Knauf offers a full encasement solution for structural steel as well as a range of passive fire protection products for use within Knauf Partition Systems. Providing innovative and fully warranted solutions to partition wall and encasement system requirements.**

# PASSIVE FIRE PROTECTION

## FIRE ENCASUREMENT

### KNAUF FIREBOARD

Knauf Fireboard is a fleece-lined plasterboard available in a wide range of thicknesses to provide up to two hours of fire protection in structural steel encasement.

#### SQUARE EDGE



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
15.0	1200	2400	61995	✗	40	115.2	1.48
20.0	1200	1800	61996	✗	40	86.4	1.43
25.0	1200	1800	61997	✗	32	69.1	1.43
30.0	1200	1800	61998	✗	26	56.1	1.43

Compliance: EN 15283-1. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Fireboard, please contact Knauf Customer Services.

### KNAUF FIREBOARD JOINT FILLER AND FINISH SPACHTEL

Knauf Fireboard-Spachtel is a gypsum based powder that is mixed with water to form a pliable joint filler. On exposed encasements, Knauf Fireboard-Spachtel can also be used as a finish, providing a smooth surface for decoration.



DIMENSIONS	MATERIAL NO.	EX STOCK	PALLET DETAILS
WEIGHT (kg)			TUBS PER PALLET
10	603402	✓	100

Shelf life: 6 months. Mix ratio: 2.5kg product to 2 litres of water. Working time: 45mins. Available as part pallet quantities.

### KNAUF GLASS FIBRE TAPE

Knauf Glasfaser-Fugendeckstreifen is a fibre-glass tape used in all joints in Knauf Fireboard installation.



DIMENSIONS		MATERIAL NO.	EX STOCK	PALLET DETAILS	
LENGTH (m)	WIDTH (mm)			PIECE PER PALLET	PACK SIZE
25	50	3698	✓	1800	40

Material Pricing Group: P9

### KNAUF HARTMUT

Knauf Hartmut is ideal for fixing through the Knauf partition stud to an abutting Knauf Fireboard system.



DIMENSIONS	WIDTH	MATERIAL NO.	EX STOCK	PALLET DETAILS	
—	50	131376	✓	PACK PER PALLET	PACK SIZE
				224	50

Material Pricing Group: PD. Includes M5 x 60mm screw

### KNAUF FIXING CLIP

Part of the Knauf Encasement system.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	HEIGHT			ITEMS/PACK	kg (APPROX.)
45	28	258330	✓	50	2


Compliance: BS EN 14195. Estimating Guide: 4 clips per linear metre of column. 2 clips per linear metre of beam. Material Pricing Group: PO

# PASSIVE FIRE PROTECTION

## FIRE ENCASUREMENT

### KNAUF 'C' CHANNEL

Galvanised lightweight steel section for use in Knauf wall lining systems and Knauf C-Form Ceiling Systems.




DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
SIZE/WEBB	LENGTH	FLANGE			LENGTHS/PACK	kg (APPROX.)
47	2400	17	243792	✘	10	11
	2700	17	243795	✔	10	12
	3000	17	70887	✔	10	13
	4000	17	70889	✔	10	18

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m<sup>2</sup> of wall lining (based on 600mm centres). Material Pricing Group: PG

### KNAUF ANGLE SECTIONS

Galvanised mild steel angles for use with partitions, column and beam encasements and suspended ceilings.



DIMENSIONS (mm)				MATERIAL NO.	EX STOCK	PACK DETAILS	
GAUGE	SIZE	LENGTH	ANGLE (DEG°)			LENGTHS/PACK	kg (APPROX.)
0.70	25 x 25	3000	90	258285	✔	10	11
0.70	25 x 50	3000	90	258286	✔	10	16

Compliance: BS EN 14195. Material Pricing Group: PO

## PASSIVE FIRE PROTECTION RANGE

### PASSIVE FIRE PROTECTION RANGE

#### KNAUF INTUMESCENT AND ACOUSTIC MASTIC

Knauf Intumescent and Acoustic Mastic is a rapid curing, water-based acrylic expanding fire resistant mastic. It can be used for linear joint sealing. Colour: Blue.




TYPE	SIZE (ml)	MATERIAL NO.	EX STOCK	PACK DETAILS
				PER PACK
Foil	600	258281	✓	12
Cartridge	310	258280	✓	12

Material Pricing Group: P9

#### KNAUF PUTTY PADS

Sheets of intumescent, mouldable putty designed for use inside and outside plastic electrical sockets. Is fire rated for of up to 2 hours and has an acoustic rating of up to 60dB(Rw) within Knauf systems.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
SIZE	THICKNESS			PADS PER BOX	kg (APPROX.)
170 x 170	3.5	268269	✓	20	2.2
230 x 170	3.5	268271	✓	20	4.8

Material Pricing Group: PA

#### RELATED PRODUCTS

Knauf Fire Panel: see **p 15**. Soundshield Plus: see **p 16** and Performance Plus: see **p 18**.





# 6.

## Jointing

**Our powdered and ready-mixed jointing range has been developed to give the best possible results and comply with BS EN 13963:2014. It is the ideal choice when bedding tapes and beads, and finishing joints. Can be hand or machine applied. Knauf jointing products give you a smooth finish and are easy to sand.**

## POWDERED JOINTING COMPOUNDS

There are several reasons why Knauf Premium Powdered Joint Compounds are so highly preferred by the applicators. Firstly, we are always in close contact with our applicators on site and we ask them what they really want and need. This input was consequently translated into high quality formulations, which result in white compounds with an outstanding performance quality. Lump-free, easy mixing, soft but stable consistency, easy troweling and easy, low dust sanding.

Knauf Finishing Products should be applied to Knauf Plasterboard to ensure system performance warranty, and as detailed in the GPDA's Product Compatibility Statement.

### KNAUF FILL & FINISH 30 PREMIUM

A fast-setting multi-purpose gypsum-based compound for bedding tapes and beads, as well as finishing. For hand application. 30 minute working time.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
10	622329	✓	100	1

Shelf life: 9 months. Compliance: EN 13963, Type 3B. Estimating Guide: To bed and fill to shoulders: 45m<sup>2</sup> per 10kg bag. Available in part pallet quantities. Material Pricing Group: P8

### KNAUF FILL & FINISH 60 PREMIUM

A fast-setting multi-purpose gypsum-based compound for bedding tapes and beads, as well as finishing. For hand application. 60 minute working time.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
10	622332	✓	100	1

Shelf life: 9 months. Compliance: EN 13963, Type 3B. Estimating Guide: To bed and fill to shoulders: 45m<sup>2</sup> per 10kg bag. Available in part pallet quantities. Material Pricing Group: P8

### KNAUF JOINT FILLER PREMIUM

A fast-setting gypsum compound for bedding joints by hand application.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
10	622340	✓	100	1
20	622342	✓	42	0.84

Shelf life: 9 months. Compliance: EN 13963, Type 3B. Estimating Guide: 55m<sup>2</sup> per 10kg bag, 110m<sup>2</sup> per 20kg bag. Available in part pallet quantities. Material Pricing Group: P8

### KNAUF JOINT CEMENT PREMIUM

A lightweight air-drying compound for bedding tapes and finishing joints by hand or machine application. Knauf Joint Cement Premium produces an exceptional finish with minimal sanding effort.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
20	622337	✓	42	0.84

Shelf life: 12 months. Compliance EN 13963, Type 3A. Estimating Guide: For two coats of finish: 80m<sup>2</sup> per 20kg bag. Available in part pallet quantities. Material Pricing Group: P8

# JOINTING

## POWDERED JOINTING COMPOUNDS

### KNAUF UNIFLOTT

Knauf Uniflott is a specially formulated joint compound for use with Knauf perforated plasterboards to create a seamless finish.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
25	253631	×	42	1.05

Shelf life: 9 months. Compliance EN 13963, Type 4B. Estimating Guide: One bag will finish approximately 21m<sup>2</sup> of board. Available in part pallet quantities. Material Pricing Group: P8

### KNAUF UNIFLOTT APPLICATOR

Reusable cartridge with spray nozzle for applying Knauf Uniflott into acoustic plate joints with an applicator gun or cartridge press. Easy to clean and insert.



MATERIAL NO.	EX STOCK	PACK DETAILS
		ITEMS PER PACK
4707	×	1

Material Pricing Group: P9. Available in part pallet quantities.

## READY-MIXED JOINTING COMPOUNDS

Knauf Ready-mixed Jointing Compounds offer an easy-to-sand and low shrinkage alternative to traditional jointing compounds. Knauf Finishing Products should be applied to Knauf Plasterboard to ensure system performance warranty, and as detailed in the GPDA's Product Compatibility Statement.



### KNAUF FILL & FINISH

An easy-to-sand jointing compound for bedding tapes and finishing joints in drywall partitions and ceilings. Ready-mixed for quick and easy application.

TUB SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			TUBS	TONNES (APPROX.)
20	601443	✓	33	0.66

Shelf life: 12 Months. Compliance: EN 13963, Type 3A. Estimating Guide: 30m<sup>2</sup> per 20kg tub. Material Pricing Group: QP. Available in part pallet quantities.



### KNAUF FILL & FINISH LIGHT

Lightweight ready-mixed compound for bedding tapes and finishing joints in drywall partitions and ceilings. Very low shrinkage finish which is easier to sand than traditional jointing compounds. Suitable for use with Bazooka and Banjo machine application.

TUB SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			TUBS	TONNES (APPROX.)
5	601462	✓	72	0.36
20	601440	✓	33	0.66

Shelf life: 12 Months. Compliance: EN 13963, Type 3A. Estimating Guide: 45m<sup>2</sup> per 20kg tub / 11.25m<sup>2</sup> per 5kg tub. Material Pricing Group: QP. Available in part pallet quantities.



**NOW AVAILABLE IN RECYCLED PLASTIC PACKAGING**



# KNAUF

EASY APPLICATION  
EASY CLEAN-UP  
EASY SANDING



KNAUF Fill & Finish Light

KNAUF Fill & Finish



LOW MESS  
LOW SHRINKAGE  
LOW VOC

SEE OUR READY-MIXED PRODUCTS IN ACTION  
BY SCANNING THE QR CODE TO WATCH OUR  
READY-MIXED VERSUS POWDERED JOINTING VIDEO



## SPECIALIST JOINTING

### KNAUF SAFEBOARD JOINT FILLER

A powdered joint filler for use with Knauf Safeboard X-ray shielding plasterboard.



TUB SIZE		MATERIAL NO.	EX STOCK	PACK DETAILS	
kg				TUBS	TONNES (APPROX.)
5		133092	✓	60	0.30

Shelf life: 6 Months. Compliance EN 13963, Type 4B. Estimating Guide: 10m<sup>2</sup> per 5kg tub. Material Pricing Group: P9. Available in part pallet quantities.

## JOINTING TAPES

### KNAUF JOINT TAPE

White paper tape for reinforcing joints by hand or machine application. Knauf Joint Tape is recommended on ceilings and to create the strongest joints. Internal corners are made simple with a centerline for easy folding.



ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS	kg (APPROX.)
150	51	258337	✓	10	12

Compliance EN 13963. Material Pricing Group: P8

### KNAUF FIBRE TAPE

Multi-purpose self-adhesive tape for reinforcing joints and patch repairs to plasterboard when gypsum based skim coating is used. Not to be used as part of a performance system.



ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS	kg (APPROX.)
90	50	493679	✓	24	7.5

Compliance EN 13963. Material Pricing Group: P9

### KNAUF CORNER FLEX TAPE

Fibre composite tape for providing protection to external corners of drylined partitions.



ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS	kg (APPROX.)
30	62	258336	✓	12	16

Material Pricing Group: P9

### KNAUF FIBRE-GLASS TAPE

Made from a fibreglass material, the tape provides strong joints which avoid cracking and have a flawless, flat surface when used with Knauf ready-mixed and powdered jointing. Minimal shrinkage is achieved by the tapes lower absorption of water from the filler. Ideal for refurbishments.



DIMENSIONS		MATERIAL NO.	EX STOCK	PALLET DETAILS	
LENGTH (m)	WIDTH (mm)			PIECE PER PALLET	PACK SIZE
25	50	3698	✓	1800	40


Material Pricing Group: P9

## JOINTING CORNER BEADS

Knauf Paper Faced Metal Corner Beads provide a quick and easy way to produce beautiful, sturdy, cost-effective corners that withstand the wear and tear of normal building use. The beads are installed with a unique paper tape 'nose coating' that resists scuffing and fuzzing from knives and sanding. Knauf flexible tapes provide solutions for uneven or curved corners.

### KNAUF DALLAS B1 EXTERNAL BEAD

Knauf Dallas B1 External Bead is used to create 90° outside corners. Suitable on any thickness of Knauf Plasterboard.



DIMENSIONS			MATERIAL NO.	EX STOCK	PACK DETAILS	
METAL (mm)	PAPER (mm)	LENGTH (m)			LENGTHS	kg (APPROX.)
16	20.5	2.6	545983	✓	50	17.25
16	20.5	3.0	545994	✓	50	18.6

Material Pricing Group: PA

### KNAUF LAS VEGAS B2 INTERNAL BEAD

Knauf Las Vegas B2 Internal Bead is used to create 90° internal corners. Suitable on any thickness of Knauf Plasterboard.



DIMENSIONS			MATERIAL NO.	EX STOCK	PACK DETAILS	
METAL (mm)	PAPER (mm)	LENGTH (m)			LENGTHS	kg (APPROX.)
9.5	16	2.6	547280	✓	50	17.25
9.5	16	3.0	547314	✓	50	22.25

Material Pricing Group: QH

### KNAUF DRYWALL ANGLE BEAD

Galvanised steel corner protection for external corners of drywall partitions.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
SIZE	LENGTH			LENGTHS/PACK	kg (APPROX.)
25 x 25	2400	258333	✓	50	20
25 x 25	3000	258334	✓	50	24

Compliance EN 13658. Material Pricing Group: P9

## JOINTING EDGE BEADS

### KNAUF FLEXIBLE METAL TAPE

Knauf Flexible Metal Tape allows you to create corners to any angle, even on irregular shaped structures such as cathedral or drop ceilings or bay windows, and a variety of other applications.



ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS	kg (APPROX.)
30.5	50	314834	✓	10	18.6

Material Pricing Group: QH

### KNAUF DRYWALL EDGE BEAD

Galvanised steel edge trim for drywall applications. Used to protect exposed plasterboard edges while forming a defined edge to the plasterboard.



ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
THICKNESS (mm)	LENGTH (mm)			LENGTHS PER PACK	kg (APPROX.)
12.5	3000	258304	✓	50	25
15	3000	258305	✓	50	27

Compliance EN 13658. Material Pricing Group: P9

## SYSTEM PERFORMANCE WARRANTY

### GPDA (GYPSUM PRODUCTS DEVELOPMENT ASSOCIATION) PRODUCT COMPATIBILITY STATEMENT:

For the purposes of preparation for decoration, gypsum based finishing products (e.g. jointing compounds and finishing plasters) can be applied to the front face of plasterboard manufactured in accordance with BS EN 520 2004 A1+ 2009, provided the products are manufactured in accordance with the current, relevant standard, e.g. Finishing Plaster – BS EN 13279-1: 2008. Jointing Materials – BS EN 13963: 2014, except where:

- (1) colour matching is required between plasterboard and jointing.
- (2) required by the manufacturer, Moisture Resistant plasterboard variants need to be primed prior to plastering.
- (3) specific finishing materials are required by the system warranty provider to maintain or achieve the system performances, for example, fire resistance and acoustic insulation.





## Finishing Solutions

**Knauf takes the hassle out of finishing with a full range of finishing materials. From powdered and ready-mixed jointing compounds, tapes and beads through to Knauf Airless spray finish, the faster, cleaner more sustainable alternative to traditional plasters.**



## READY-MIXED AIRLESS FINISH

Knauf ready-mixed Airless Finish is a highly efficient direct alternative to traditional plaster for finishing walls and ceilings. It offers an excellent quality smooth white finish and is purpose-designed for machine application via a high pressure piston pump. Supplied pre-mixed to the correct consistency for spray application, no direct water supply is required on site and wastage is typically less than 1%.

### KNAUF AIRLESS FINISH

Used as a direct finish coat onto smooth backgrounds such as taped and jointed plasterboard, precast panels, aircrete panels or refurbishment over previously decorated surfaces. This product is ideal for smooth finishes over Knauf Plasterboard with a two-coat application onto taped and jointed drylining systems. Knauf Airless Finish is applied 1–2mm thick with a drying time of approximately 12-24 hours prior to decorating. It is applied using an airless high pressure piston pump machine.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
25	470362	✓	40	1.00

Shelf life: 12 Months. Estimating Guide: Approx 15m<sup>2</sup> per 25kg bag at 1mm thickness. Material Pricing Group: I1



**kNAUF**

# KNAUF AIRLESS FINISH

**Up to 3 times faster**  
than traditional methods

**Reduced water**  
and easier clean-up

**High productivity:**  
200-250m<sup>2</sup> per day with 2 people

Contact [technical-uk@knauf.com](mailto:technical-uk@knauf.com)  
to arrange a training session or demo

SCAN HERE  
TO WATCH OUR  
TOP TIPS VIDEO



## READY-MIXED FINISHES

### KNAUF EASY PLASTER

Knauf Easy Plaster is a ready-mixed lightweight patching plaster specially designed for small to large repairs to cracks in walls and ceilings. It will not shrink or crack and is ideal for filling holes up to 40mm deep with a two-coat application. The plaster can be painted or wallpapered once dry (24 hour drying time).



TUB SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			TUBS	TONNES (APPROX.)
2.5	282343	✓	150	0.44
6	282344	✓	60	0.42

Shelf life: 12 Months. Estimating Guide: 0.75m<sup>2</sup> per litre at 6mm thickness. Available in part pallet quantities. Material Pricing Group: 11

**NOW AVAILABLE IN RECYCLED PLASTIC PACKAGING**

## ROLLER APPLIED PLASTER

Our ready-mixed roller applied plaster products have been designed to be simple and effective to use. Use with a 9" medium pile roller.

### KNAUF PROROLL LIGHT

Use as a finish on Knauf ProRoll Max or onto plasterboard backgrounds for a superior finish. Apply in coats up to 1mm thick, up to a maximum of 3mm in multiple coats.



TUB SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			TUBS	TONNES (APPROX.)
12.5	593010	✓	40	0.5

Shelf life: 12 months. Estimating Guide: Up to 10m<sup>2</sup> per tub at 1mm thickness. Available in part pallet quantities. Material Pricing Group: 11

### KNAUF PROROLL MAX

Use to level the surface of existing internal walls and ceilings. Ideal for covering textured backgrounds. Use with Knauf ProRoll Light for a superior finish. Apply in coats up to 2mm thick, up to a maximum of 4mm in multiple coats.



TUB SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			TUBS	TONNES (APPROX.)
13.5	593011	✓	40	0.54

Shelf life: 12 months. Estimating Guide: Up to 10m<sup>2</sup> per tub at 1mm thickness. Available in part pallet quantities. Material Pricing Group: 11



# FINISHING SOLUTIONS

## READY-MIXED PRIMERS

### KNAUF BETOKONTAKT

Knauf Betokontakt is a polymer-based product designed to provide a key to backgrounds which are smooth or have limited suction. Can be applied with a brush, roller or by spraying. Use with Knauf Moisture Panel and or Knauf Performance Plus for areas of application of gypsum plaster skim. See **p16** and **p17**.



TUB SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			TUBS	TONNES (APPROX.)
20	545454	✓	32	0.64

Shelf life: 18 months. Estimating Guide: Up to 88m<sup>2</sup> per tub. No need to dilute. Available in part pallet quantities. Material Pricing Group: 12



**NOW AVAILABLE IN RECYCLED PLASTIC PACKAGING**






8.

## Acoustic and Design

An expansive selection of acoustic ceiling and wall lining tiles with different expressions, design opportunities and acoustic profiles.

# Choose the right range for your ceiling

Choosing the right ceiling tile for the right application can be difficult, which is why we have created the selector below to help make specification easier.

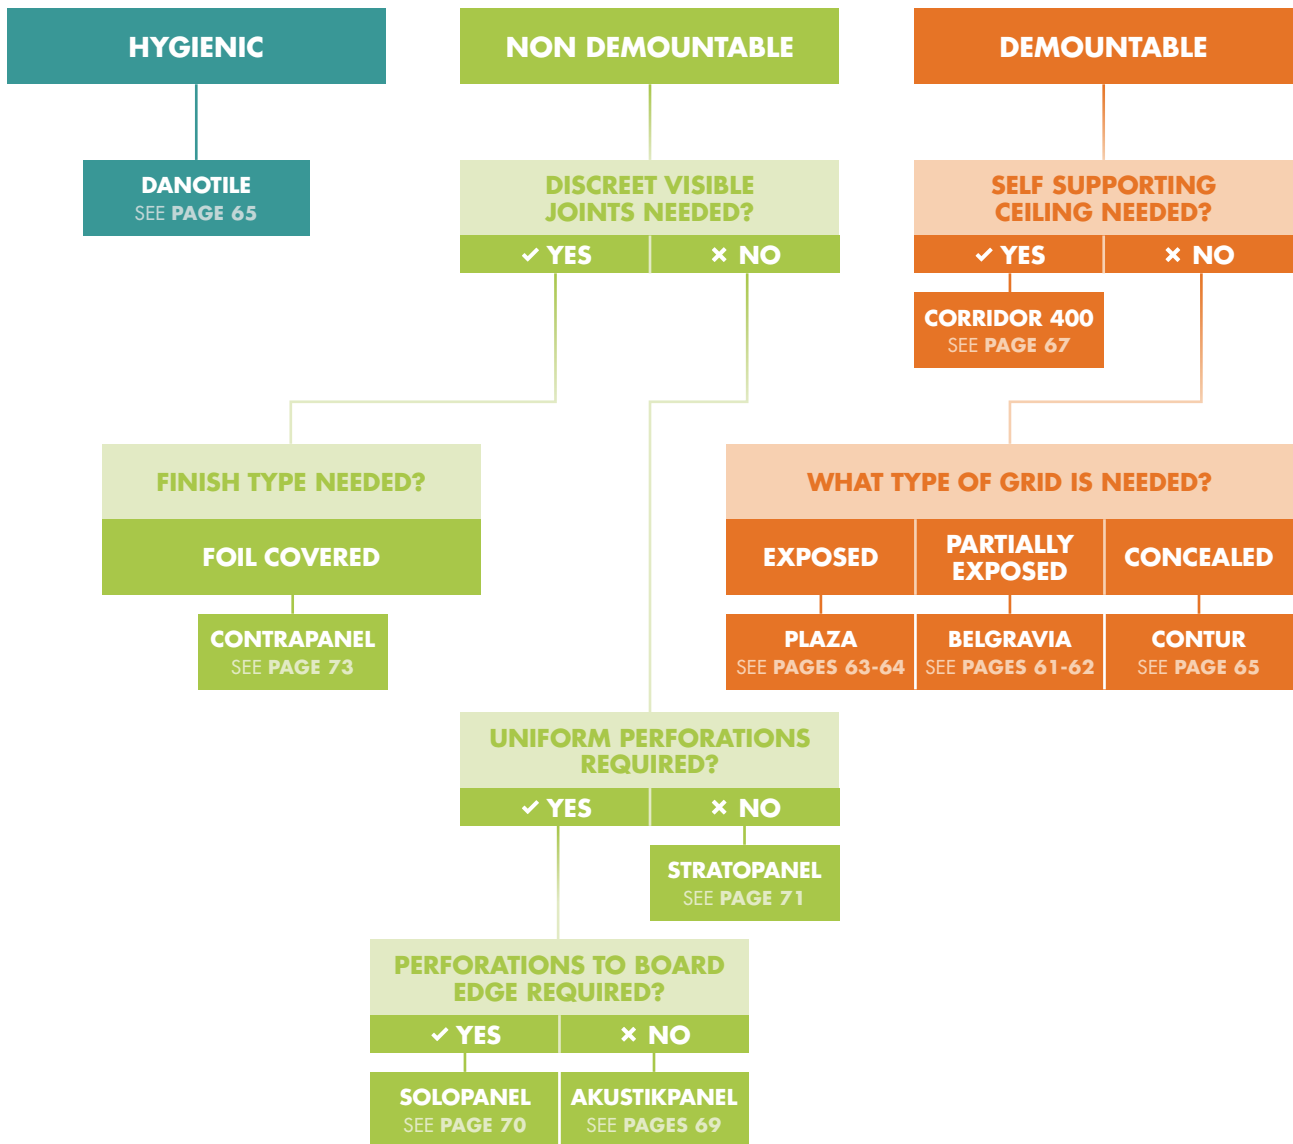

**ALL RECOMMENDATIONS IN THIS DOCUMENT ARE KNAUF GUIDANCE ONLY. FINAL SPECIFICATION IS DEPENDENT UPON PERFORMANCE REQUIREMENTS AND EXISTING BUILD-UP.**



**FOR FURTHER INFORMATION, CONTACT OUR TECHNICAL TEAM:  
LIVE WEBCCHAT OR PHONE 0800 521 050 (OPTION 2): 09:00 – 17:00  
OR WRITE TO TECHNICAL-UK@KNAUF.COM  
WE HAVE A SPECIFICATION TO SUIT YOUR REQUIREMENTS!**




## DEMOUNTABLE CEILINGS – T-GRID

### KNAUF BELGRAVIA S24

Belgravia acoustic tiles offer a classic, highly robust and durable acoustic ceiling with a high acoustic performance. Belgravia suspended ceiling, with its recessed grid, is exceptionally easy to install and demount for servicing. This type of gypsum ceiling is ideal for buildings requiring easy maintenance and servicing of installations, while retaining the highest acoustic performance and a calm, contemporary ceiling expression.



#### PRODUCT DETAILS



##### EDGE E S24

Partially exposed grid.  
Non-perforated border around the edge of the tile.  
Surface: white painted.

MICRO	GLOBE	QUADRIL	TANGENT	PLAIN
Square 3x3mm c/c 8.33mm	Circle Ø6mm c/c 15mm	Square 12x12mm c/c 30mm	Obround 4x14mm c/c 10/20mm	PLAIN

#### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/ PACK	WEIGHT (kg)
MICRO	E	M1	12.5	600	600	58846	✗	8	25
GLOBE	E	G1	12.5	600	600	58844	✗	8	25
QUADRIL	E	Q1	12.5	600	600	58845	✗	8	25
TANGENT*	E	T1	12.5	600	600	172971	✗	8	25
PLAIN	E	P1	12.5	600	600	58563	✗	8	28

Compliance: EN 14190. Material Pricing Group: QL

\*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.

Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.




## DEMOUNTABLE CEILING – T-GRID

### KNAUF BELGRAVIA S15

Belgravia acoustic tiles offer a classic, highly robust and durable acoustic ceiling with a high acoustic performance. Belgravia suspended ceiling, with its recessed grid, is exceptionally easy to install and demount for servicing. This type of gypsum ceiling is ideal for buildings requiring easy maintenance and servicing of installations, while retaining the highest acoustic performance and a calm, contemporary ceiling expression.




#### PRODUCT DETAILS



##### EDGE E S15

Partially concealed grid.  
Non-perforated border around the edge of the tile.  
Surface: white painted.



##### EDGE E+ S15

Partially concealed grid.  
Perforated to board edge.  
Surface: white painted.

<b>MICRO</b> Square 3x3mm c/c 8.33mm	<b>GLOBE</b> Circle Ø6mm c/c 15mm	<b>QUADRIL</b> Square 12x12mm c/c 30mm	<b>UNITY 3</b> Square 3.5x3.5mm c/c 8.33mm	<b>UNITY 4</b> Circle Ø4mm c/c 10mm

#### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/ PACK	WEIGHT (kg)
MICRO	E	M1	12.5	600	600	58843	✗	8	26
GLOBE	E	G1	12.5	600	600	58841	✗	8	26
QUADRIL	E	Q1	12.5	600	600	58842	✗	8	26
UNITY 3	E+	U3	12.5	600	600	469237	✗	8	26
UNITY 4	E+	U4	12.5	600	600	532691	✗	8	26

Compliance: EN 14190. Material Pricing Group: QL



**E+ OPTION HAS PERFORATIONS TO THE EDGE OF THE BOARD**

Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock

## DEMOUNTABLE CEILING — T-GRID

### KNAUF PLAZA S15 & S24

Plaza acoustic ceiling tiles are designed with a straight edge for installation in an exposed T-grid, ensuring a highly robust suspended ceiling. Plaza ceiling tiles with Unity 3 perforation achieve up to Class A sound absorption and are classified as impact resistant acoustic ceilings, ideal for areas with robustness requirements such as within the education sector, and areas with security requirements such as showrooms. The perforated ceiling tiles are made from gypsum, providing easy access to services in the ceiling void, quick fitting of fixtures, and a long service life thanks to the durability and sustainability of the sound absorbing material.



### PRODUCT DETAILS



#### EDGE A S15/S24 (9.5mm)

Exposed grid.

Non-perforated border around the edge of the tile.

Surface: white painted.

All 9.5mm Plaza tiles can be used with both 15mm (S15) and 24mm (S24) grids.

<b>MICRO</b> Square 3x3mm c/c 8.33mm	<b>GLOBE</b> Circle Ø6mm c/c 15mm	<b>QUADRIL</b> Square 12x12mm c/c 30mm	<b>PLAIN</b>

### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/ PACK	WEIGHT (kg)
MICRO	A	M1	9.5	600	600	58838	✗	10	23
GLOBE	A	G1	9.5	600	600	58825	✗	10	23
QUADRIL	A	Q1	9.5	600	600	58824	✗	10	23
PLAIN	A	P1	9.5	600	600	50344	✗	10	31

Compliance: EN 14190. Material Pricing Group: QL

Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

## DEMOUNTABLE CEILING – T-GRID

### KNAUF PLAZA S15 & S24

Plaza acoustic ceiling tiles are designed with a straight edge for installation in an exposed T-grid, ensuring a highly robust suspended ceiling. Plaza ceiling tiles with Unity 3 perforation achieve up to Class A sound absorption and are classified as impact resistant acoustic ceilings, ideal for areas with robustness requirements such as within the education sector, and areas with security requirements such as showrooms. The perforated ceiling tiles are made from gypsum, providing easy access to services in the ceiling void, quick fitting of fixtures, and a long service life thanks to the durability and sustainability of the sound absorbing material.



### PRODUCT DETAILS

	<p><b>EDGE A S15/S24 (12.5mm)</b> Exposed grid. Non-perforated border around the edge of the tile. Surface: white painted.</p>		<p><b>EDGE A+ S15/S24 (12.5mm)</b> Exposed grid. Perforations to tile edge. Surface: white painted.</p>
--	--	--	---

All 12.5mm Plaza tiles with an A edge can be used with both the 15mm (S15) or 24mm (S24) grids.  
All 12.5mm Plaza tiles with an A+ edge must be used with the relevant 15mm (S15) or 24mm (S24) grid.

<p><b>TANGENT</b> Obround 4x14mm c/c 10/20mm</p>	<p><b>UNITY 3</b> Square 3.5x3.5mm c/c 8.33mm</p>	<p><b>UNITY 4</b> Circle Ø4mm c/c 10mm</p>	<p><b>UNITY 8 15 20</b> Various circles Ø8/15/20mm</p>

### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/PACK	WEIGHT (kg)
TANGENT	A	T1	12.5	600	600	173226	✘	8	26
UNITY 3	A+	U3	12.5	600	600	469233 (S15)	✘	8	26
	A+	U3	12.5	600	600	473243 (S24)	✘	8	26
UNITY 4	A+	U4	12.5	600	600	532687 (S24)	✘	8	26
U8 15 20	A+	U8 15 20	12.5	600	600	473245 (S24)	✘	8	26

Compliance: EN 14190. Material Pricing Group: QL



**A+ OPTION HAS PERFORATIONS TO THE EDGE OF THE BOARD**

☒ not able to order through EDI. Specific product configuration details required. Please contact Knauf Customer Services to order.  
Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.  
\*Minimum order quantity 50m<sup>2</sup>











## DEMOUNTABLE CEILING – T-GRID

### KNAUF CONTUR S24

Contur offers simple aesthetics combined with high functionality. Once installed, Contur acoustic ceiling tiles conceal the T-grid, offering an opportunity to create a monolithic acoustic ceiling that is completely demountable. Contur acoustic tiles require low installation depth (down to 63mm) and are therefore ideal as a suspended ceiling in renovation projects.



### PRODUCT DETAILS

EDGE D					EDGE D+		
							
Concealed grid. Non-perforated border around the edge of the tile. Surface: white painted.					Concealed grid. Perforated to board edge. Surface: white painted.		
							
<b>MICRO</b> Square 3x3mm c/c 8.33mm	<b>GLOBE</b> Circle Ø6mm c/c 15mm	<b>QUADRIL</b> Square 12x12mm c/c 30mm	<b>TANGENT</b> Obround 4x14mm c/c 10/20mm	<b>PLAIN</b>	<b>UNITY 3</b> Square 3.5x3.5mm c/c 8.33mm	<b>UNITY 4</b> Circle Ø4mm c/c 10mm	<b>UNITY 8 15 20</b> Various circles Ø8/15/20mm

### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/PACK	WEIGHT (kg)
MICRO	D	M1	12.5	600	600	54460	✗	8	29
GLOBE	D	G1	12.5	600	600	24799	✗	8	29
QUADRIL	D	Q1	12.5	600	600	24804	✗	8	29
TANGENT*	D	T1	12.5	600	600	173220	✗	8	29
PLAIN	D	P1	12.5	600	600	24929	✗	8	31
UNITY 3	D+	U3	12.5	600	600	471331	✗	8	29
UNITY 4	D+	U4	12.5	600	600	532683	✗	8	29
U8 15 20	D+	U8 15 20	12.5	600	600	471325	✗	8	29

Compliance: EN 14190. Material Pricing Group: QL



**D+ OPTION HAS PERFORATIONS TO THE EDGE OF THE BOARD**

\*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied. Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.



## DEMOUNTABLE CEILING — T-GRID

### KNAUF DANOTILE

Danotile is a high performance hygiene ceiling tile, suitable for rooms with high cleaning and infection control requirements. The white foil covered robust surface tolerates tough cleaning and disinfection agents as well as pH levels from 2-13. As a clean-room certified gypsum ceiling, Danotile is widely used in healthcare facilities and kitchens.



#### PRODUCT DETAILS



#### EDGE A S15/S24 (6.5mm/9.5mm)

Exposed grid.  
Surface: white painted.

All 6.5mm and 9.5mm Danotile can be used with both 15mm (S15) and 24mm (S24) grids.



PLAIN

#### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/ PACK	WEIGHT (kg)
PLAIN	A	P1	6.5	600	600	57998	✓	280	696
	A	P1	6.5	600	1200	57999	✓	140	696
	A	P1	9.5	600	600	227092	✗	180	572

Compliance: EN 14190. Material Pricing Group: QK

Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

#### STOCK AVAILABILITY

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock


## DEMOUNTABLE SELF-SUPPORTING CEILINGS

### KNAUF CORRIDOR 400

Corridor 400 acoustic ceiling is a unique ceiling solution for narrow rooms and corridors. The gypsum ceiling with its distinct and unified look is installed without any cross runners or suspension hangers, on a self-supporting system with a flex runner. Therefore, a Corridor acoustic ceiling is extremely quick to install; up to 3 times faster installation than a traditional T-grid ceiling in a corridor. The acoustic ceiling planks are free spanning between the walls, and can span up to 2.4m.



#### PRODUCT DETAILS



##### EDGE D

Free-spanning tile with visible trim at short ends.  
Non-perforated border around edge of tile.  
Surface: white painted.

MICRO	GLOBE	QUADRIL	TANGENT	PLAIN
Square 3x3mm c/c 8.33mm	Circle Ø6mm c/c 15mm	Square 12x12mm c/c 30mm	Obround 4x14mm c/c 10/20mm	PLAIN

#### STANDARD PRODUCTS

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
			THICKNESS	WIDTH	LENGTH			ITEMS/ PACK	WEIGHT (kg)
MICRO	M1	M1	9.5	400	1200	213300	✗	4	19
	M1	M1	9.5	400	1800	213302	✗	4	29
	M1	M1	9.5	400	2400	213304	✗	4	38
GLOBE	G1	G1	9.5	400	1200	213295	✗	4	19
	G1	G1	9.5	400	1800	213297	✗	4	29
	G1	G1	9.5	400	2400	213299	✗	4	38
QUADRIL	Q1	Q1	9.5	400	1200	213305	✗	4	19
	Q1	Q1	9.5	400	1800	213307	✗	4	29
	Q1	Q1	9.5	400	2400	213309	✗	4	38
TANGENT*	T1	T1	9.5	400	1200	213310	✗	4	19
	T1	T1	9.5	400	1800	213312	✗	4	29
	T1	T1	9.5	400	2400	213314	✗	4	38
PLAIN	P1	P1	9.5	400	1200	213290	✗	4	21
	P1	P1	9.5	400	1800	213292	✗	4	31
	P1	P1	9.5	400	2400	213294	✗	4	52

Material Pricing Group: QL

COMPATIBILITY	DESCRIPTION	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	ITEMS / PACK
CORRIDOR 400		WIDTH	LENGTH	DEPTH			
✓	Flexrunner	65	1200	44	198603	✗	4
✓		65	1800	44	198652	✗	4
✓		65	2400	44	198660	✗	4

[1] Material Pricing Group: QM. [2] Material Pricing Group: QN.

**NB: Flexrunner must also be ordered to complete this system.**

\*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.

Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

## NEED A BREATH OF FRESH AIR?

The Knauf acoustic ceiling range comes with an innovative air-purifying technology called Cleaneo, as standard.

The Cleaneo feature within the gypsum core helps to decompose some of the harmful volatile organic compounds (VOC's) that are emitted into the room by everyday building materials, furniture and cleaning products, some of which have been linked to allergies, asthma, and even cancer.

Since we spend up to 90% of our time indoors, it is important that the air we breathe in isn't contaminated with pollutants such as alcohol, aldehydes, ketones and esters – typical emissions from everyday items such as cleaning products.








Cleaneo technology can help to reduce some of these emissions, helping to make the air we breathe safer and cleaner. One of the ways we:

***Build for the world we live in***

## CLEaneo TECHNOLOGY

### THIS IS WHERE THE REAL MAGIC HAPPENS

### AIR PURIFICATION IN ACOUSTIC GYPSUM MATERIALS




## NON-DEMOUNTABLE CEILING

### KNAUF AKUSTIKPANEL

Ceiling and wall lining offering a seamless and discreet look, with coherence between walls and ceilings. Possibility to create curved acoustic shapes on site or from the factory. No visible joints after finishing. Available in a squared 'quadril' perforation type with a choice of perforation layouts on the boards.

#### ONE SIZE OF QUADRIL PERFORATION (FOUR-SIDED TAPERED EDGE)



**4 Sided Tapered**  
Tapered Edge on 4 sides  
Joints filled with Uniflott



**QUADRIL**  
Square  
12x12mm  
c/c 30mm

DESIGN	EDGE	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	FLEECE	PALLET DETAILS		
		THICKNESS	WIDTH	LENGTH				COLOUR	BOARDS	m <sup>2</sup>
BQ8	TE	12.5	1200	2400	432055	✗	White	25	72	0.74
BQ8	TE	12.5	1200	2400	432102	✗	Black	25	72	0.74
BQ8	TE	12.5	1200	2400	432103	✗	Grey	25	72	0.74

Area of perforation: BQ7 = 10% BQ8 = 16% BQ9 = 10% BQ10 = 17%. Compliance: EN 14190. Material Pricing Group: Q2

The perforations are in the grey highlighted region of the board only



BQ8

Special Conditions – All Knauf Akustikpanel FF and SK Edge components are subject to extended lead times. Please contact Customer Services for availability. **Full pallet quantities only.**




## NON-DEMOUNTABLE CEILING

### KNAUF SOLOPANEL

Continuous perforations to the edge offer a fluid, monolithic look, with coherence between walls and ceilings. Acoustic gypsum lining for both wall surfaces and ceilings, with no visible joints after finishing. Create your perfect aesthetic finish by choosing either the 1 or 2 perforation size options



#### ONE SIZE OF GLOBE PERFORATION (UFF EDGE)



DESIGN	EDGE	DIMENSIONS (mm)					MATERIAL NO.	EX STOCK	FLEECE	PALLET DETAILS			
GLOBE		A	B	THICKNESS	WIDTH	LENGTH			COLOUR	BOARDS	m <sup>2</sup>	TONNES (APPROX.)	
G8/18	UFF	8	18	12.5	1188	1998	539622 <sup>CF</sup>	✗	White	25	59.4	0.63	
G8/18	UFF	8	18	12.5	1188	1998	539622 <sup>CF</sup>	✗	Black	25	59.4	0.63	
G15/30	UFF	15	30	12.5	1200	1980	621350 <sup>CF</sup>	✗	White	25	59.4	0.60	
G15/30	UFF	15	30	12.5	1200	1980	621350 <sup>CF</sup>	✗	Black	25	59.4	0.60	

Area of perforation: G6/18 = 8.7% G8/18 = 15.5% G10/23 = 14.8% G15/30 = 19.6%. Compliance: EN 14190. Material Pricing Group: Q2  
<sup>CF</sup> not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.


#### TWO SIZES OF GLOBE PERFORATION (UFF EDGE)



DESIGN	EDGE	DIMENSIONS (mm)					MATERIAL NO.	EX STOCK	FLEECE	PALLET DETAILS			
GLOBE		A	B	C	THICKNESS	WIDTH	LENGTH		COLOUR	BOARDS	m <sup>2</sup>	TONNES (APPROX.)	
G8/12/50	UFF	8	12	50	12.5	1200	2000	612611	✗	White	25	60.0	0.66
G8/12/50	UFF	8	12	50	12.5	1200	2000	611754	✗	Black	25	60.0	0.66
G12/20/66	UFF	12	20	66	12.5	1188	1980	621357 <sup>CF</sup>	✗	White	25	58.9	0.60
G12/20/66	UFF	12	20	66	12.5	1188	1980	621357 <sup>CF</sup>	✗	Black	25	58.9	0.60

Area of perforation: G8/12/50 = 13.1% G12/20/66 = 19.6%. Compliance: EN 14190. Material Pricing Group: Q2  
<sup>CF</sup> not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.

#### ONE SIZE OF QUADRIL PERFORATION (UFF EDGE)



DESIGN	EDGE	DIMENSIONS (mm)					MATERIAL NO.	EX STOCK	FLEECE	PALLET DETAILS			
GLOBE		A	B	THICKNESS	WIDTH	LENGTH			COLOUR	BOARDS	m <sup>2</sup>	TONNES (APPROX.)	
Q8/18	UFF	8	18	12.5	1188	1998	539651 <sup>CF</sup>	✗	White	25	59.4	0.60	
Q8/18	UFF	8	18	12.5	1188	1998	539651 <sup>CF</sup>	✗	Black	25	59.4	0.60	
Q12/25	UFF	12	25	12.5	1200	2000	539661 <sup>CF</sup>	✗	White	25	60.0	0.60	
Q12/25	UFF	12	25	12.5	1200	2000	539661 <sup>CF</sup>	✗	Black	25	60.0	0.60	

Area of perforation: Q8/18 = 19.8% Q12/25 = 23%. Compliance: EN 14190. Material Pricing Group: Q2  
<sup>CF</sup> not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.

Special Conditions – All Knauf Solopanel components are subject to extended lead times.  
 Please contact Customer Services for availability. Full pallet quantities only.

#### STOCK AVAILABILITY


- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock

## NON-DEMOUNTABLE CEILING

### KNAUF STRATOPANEL

Continuous random perforation pattern offering a fluid, monolithic look. Seamless lining for wall and ceiling surfaces. Offering a unique aesthetic feature, while still offering high acoustic properties and the long lasting properties of gypsum.

#### RANDOM GLOBE PERFORATION (UFF EDGE)



**UFF Edge**  
Joints filled with Uniflott.



**Q8/15/20**  
Various circles  
Ø 8/15/20 mm



**Q12/20/35**  
Various circles  
Ø 12/20/35 mm

DESIGN	EDGE	DIMENSIONS (mm)						MATERIAL NO.	EX STOCK	FLEECE	PALLET DETAILS		
		A	B	C	THICK-NESS	WIDTH	LENGTH				COLOUR	BOARDS	m <sup>2</sup>
G8/15/20	UFF	8	15	20	12.5	1200	2000	539670 <sup>CF</sup>	✘	White	25	60.0	0.67
G8/15/20	UFF	8	15	20	12.5	1200	2000	539670 <sup>CF</sup>	✘	Black	25	60.0	0.67
G12/20/35	UFF	12	20	35	12.5	1200	1875	621359 <sup>CF</sup>	✘	White	25	56.3	0.64
G12/20/35	UFF	12	20	35	12.5	1200	1875	621359 <sup>CF</sup>	✘	Black	25	56.3	0.64

Compliance: EN 14190. Material Pricing Group: Q2

<sup>CF</sup> not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.

\*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.


Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

## NON-DEMOUNTABLE CEILING

### KNAUF CONTRAPANEL

Acoustic performance and impact resistance in one solution, with a distinct unified look. Tested in accordance with EN 13964 – the toughest requirements for impact resistance. No filling or painting required, and a time-saving installation in just a few steps. Foil covered surface – easy to clean. Ideal for high activity rooms such as gymnasiums and sports halls, due to its exceptional strength.

#### PRODUCT DETAILS



##### EDGE B

Bevelled edge.  
Visible joints.  
Surface: washable, white surface.



##### GLOBE

Circle  
Ø6mm  
c/c 15mm

The perforations are in the grey highlighted region of the board only



DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	LOOSE ON PALLETS
			THICKNESS	WIDTH	LENGTH			
GLOBE	B	G1F	12.5	600	1200	111878	✘	50

Compliance: EN 14190. Material Pricing Group: QL

#### CONSUMPTION OF WHITE SCREWS FOR KNAUF CONTRAPANEL

SCREWS	LENGTH mm	MATERIAL NO.	EX STOCK	NOS. PER PACK	DESCRIPTION
Screw WS32T, white	32	198794	✘	100	For one layer gypsum on wood
Screw no. 408, white	42	199109	✘	100	For two layers gypsum on wood
Screw WS25S, white	25	219774	✘	100	For one layer gypsum on steel
Screw WS25S, white	25	219773	✘	1000	For one layer gypsum on steel
Screw WS38S, white	38	219780	✘	100	For two layers gypsum on steel

Compliance: EN 14566. Material Pricing Group: QN. Template for screw placement included in each pallet for size 600x1200 and size 600x1800mm.

PANEL SIZE mm	FOR CEILING OR WALLS FURRING CC 300 mm	FOR WALLS FURRING CC 200 mm
600 x 1200	16 each/board	20 each/board
600 x 1800	22 each/board	28 each/board
600 x 2400	28 each/board	36 each/board

Additional delivery charges may apply. Please contact Knauf Customer Services for more information.


## SOUND ABSORBING WALL PANEL

### KNAUF ADIT

Instant acoustic wall panels, suitable as a DIY product, comes as a ready to install kit. Highly effective solution for improving acoustic performance in existing rooms. Exceptionally fast and easy installation. Easy cleaning and maintenance thanks to the foil-covered, robust surface. Fully customisable; Adit panels can be printed on.



### PRODUCT DETAILS



#### EDGE B

Bevelled edge, visible joints. Non-perforated border around edge of board  
Surface: laminated.



#### TANGENT

Obround  
4x14mm  
c/c 10/20mm

DESCRIPTION	EDGE	DESIGN	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS
			THICKNESS	WIDTH	LENGTH			
TANGENT	T1	B	9.5	450	2400	180369	✘	8

Compliance: EN 14190. Material Pricing Group: QL

### EACH KNAUF ADIT PACK CONTENTS:

- 2 pcs. Adit panels 450 x 2400mm
- 4 pcs. galvanised Z-profiles
- 8 pcs. 30mm Danopor
- 4 pcs. galvanised end closing profiles for Z-profiles
- 4 pcs. white varnished end profiles
- 4 pcs. hold down clips
- 4 pcs. hold down clips
- 2 pcs. mounting templates
- 1 pcs. mounting instruction







Knauf ADIT is also available with print of your own choice. Contact Knauf Customer Services for more information.



















## NON-DEMOUNTABLE CEILINGS – ACCESSORIES

	DESCRIPTION			MATERIAL NO.	EX STOCK	ITEMS / PACK
White painted screws for Knauf Contrapanel	For one layer gypsum on wood		32	198794	×	100
	For two layers gypsum on wood		42	199109	×	100
	For one layer gypsum on steel		25	219774	×	100
	For one layer gypsum on steel		25	219773	×	1000

Material Pricing Group QN

Special Conditions – All Knauf Acoustic and Design range components are subject to extended lead times. Please contact Customer Services for availability.

## SUSPENSION SYSTEMS SUMMARY

COMPATIBILITY							DESCRIPTION	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	ITEMS / PACK
DANOTILE	CONTUR 24	BELGRAVIA 24	BELGRAVIA 15	PLAZA 15	PLAZA 24	CORRIDOR 400		WIDTH	LENGTH	DEPTH			
						✓	Main runner 	35	3700	38	343273 <sup>1</sup>	✗	16
✓	✓	✓			✓		Main runner type DX2 	24	3700	38	447854 <sup>1</sup>	✗	20
✓		✓			✓		Cross tee type DX2 	24	600	38	788109	✗	40
✓		✓			✓			24	1200	38	788110	✗	40
✓			✓	✓			Main runner type DX2 	15	3700	38	772515 <sup>1</sup>	✗	20
✓			✓	✓			Cross tee type DX2 	15	600	38	772521	✗	40
✓			✓	✓				15	1200	38	772522 <sup>1</sup>	✗	40
✓	✓	✓	✓	✓	✓		Wall angle type MIE2024 	20	3000	24	434023 <sup>1</sup>	✗	40
						✓	Wall angle MI4020 	20	3000	40	772542 <sup>1</sup>	✗	20
						✓	Shadow line trim type MS14 	20+	3000	20+	762908 <sup>1</sup>	✗	20
✓		✓	✓	✓	✓	✓	Shadow line trim type MS15 	15+	3050	8+25	762907 <sup>1</sup>	✗	30
	✓						Spacer bar 		600		760656 <sup>2</sup>	✗	50
	✓			✓	✓		Direct Hanger 			80	316304 <sup>2</sup>	✗	100
	✓			✓	✓						100	316302 <sup>2</sup>	✗
✓	✓	✓	✓	✓	✓	✓	Quick hanger (The size specification indicates the min and max range) 	100 – 300			469861 <sup>2</sup>	✗	100
✓	✓	✓	✓	✓	✓	✓		300 – 600			469868 <sup>2</sup>	✗	100
✓	✓	✓	✓	✓	✓	✓		600 – 1000			469872 <sup>2</sup>	✗	100
✓	✓	✓	✓	✓	✓	✓		1000 – 1250			469876 <sup>2</sup>	✗	100
✓	✓	✓	✓	✓	✓	✓		1250 – 1500			469878 <sup>2</sup>	✗	100
	✓						Clips G, Q, M, T and R perf 			1/11	198364 <sup>2</sup>	✗	
						✓	Flexrunner 	65	1200	44	198603 <sup>2</sup>	✗	4
						✓		65	1800	44	198652 <sup>2</sup>	✗	4
						✓		65	2400	44	198660 <sup>2</sup>	✗	4

[1] Material Pricing Group: QM. [2] Material Pricing Group: QN.

# ACOUSTIC AND DESIGN

## PAINTING SERVICE

### PAINTING METHOD: SPRAY PAINTED

**Quality:** Surface covered only – little/no paint in perforation holes.

**Application:** Can be applied on all perforations. We recommend this for light colours ONLY\*

### PAINTING METHOD: IMMERSED

Maximum size 625x1250

**Quality:** Fully painted / the panel is dipped and the perforation holes are coloured.

**Application:** Can be applied on all perforations. Available for all colours.

### UNTREATED PRODUCTS PAINTED STANDARD WHITE (NCS 0701 Y24R AS RAL 9003)

**Quality:** Fully painted / the panel is dipped and the perforation holes are coloured.

**Application:** Can be applied on all perforations. Available for all colours.

PRICES AVAILABLE ON REQUEST.

Please contact [cservice@knauf.com](mailto:cservice@knauf.com) to enquire and include the RAL or NCS colour reference.

\* We define light colours as the following:

**RAL:** 1013, 1014, 1015, 7035, 7047, 9001, 9002, 9010, 9016, 9018

**NCS:** If the first 2 digits are less than or equal to 10 and the second 2 digits are less than or equal to 10 (e.g. S0510-Y, S0505-B20G, S1010-R60B) **OR** If the last 2 digits = 00, then the first 2 digits may be up to 15 (e.g. S1500 N)





9.

## **AQUAPANEL®**

**Knauf AQUAPANEL® is a range of cement boards, specifically designed to be resistant to water damage. They can be used as render carriers on external walls and soffits, as tile backers for internal walls and floors in wet areas and as rooftop boards. A comprehensive range of jointing and finishing accessory products complete these fully warranted high performance systems.**



## AQUAPANEL® CEMENT BOARDS

**Knauf AQUAPANEL® Cement Board technology** sets new standards for the design and construction of buildings across Europe. Knauf AQUAPANEL® boards will not deteriorate in water and offer very high impact resistance.

### KNAUF AQUAPANEL® CEMENT BOARD INDOOR

**Designed to be used as a high-performance tile backing board and is also ideal as a general building board.** This is a tough, impact-resistant glass-fibre-reinforced cement tile backer for use in wet and humid areas. At 11kg/m<sup>2</sup>, the new board is 25% lighter, making the installation easier and faster than before. A bending radius of 1m can be achieved without the need to cut the board into strips.




DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
12.5	900	1200	519734	✓	55	59.4	0.65
12.5	900	2400	508257	✓	55	118.8	1.30
12.5	1200	2400	519708	✓	55	158.4	1.74

Compliance: ETA-07/0173. Material Pricing Group: Q1 Note: 2400mm long boards are recommended for use in commercial applications.

### KNAUF AQUAPANEL® CEMENT BOARD FLOOR TILE UNDERLAY

**Ideal for refurbishment projects where a tiled floor is desired.** This board is made from tough Portland cement and has a coated fibre mesh embedded in the core. It is an ideal solution for refurbishments where a tiled floor is required and at only 6mm thick, room height is not compromised. It will not rot or warp.




DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
6	900	1200	240211	✓	50	54.0	0.46

Material Pricing Group: Q1

### KNAUF AQUAPANEL® CEMENT BOARD SKYLITE

**Offers a lightweight solution for both interior and exterior ceilings and soffits.**

This is a lightweight 8mm cement board suitable for interior ceilings in wet and humid areas as well as some exterior soffits dependent on specification. Contact Knauf for exterior specification. See **p 35-37** for associated coated metal components for the substructure of Knauf AQUAPANEL® Interior and Exterior Ceiling Systems.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PALLET DETAILS		
THICKNESS	WIDTH	LENGTH			BOARDS	m <sup>2</sup>	TONNES (APPROX.)
8	900	1200	433850	✓	80	86.4	0.90

Compliance: ETA-13/0608. Material Pricing Group: Q1

## AQUAPANEL® FIXINGS

### KNAUF AQUAPANEL® MAXI SCREWS (SN)

Corrosion-protected screws for fixing Knauf AQUAPANEL® to light gauge steel profiles (up to 0.7mm) as part of Knauf AQUAPANEL® Interior and Exterior systems. They have a needle point and countersunk heads. The 39 and 55 variants can also be used for timber frame.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS PER CARTON	kg (APPROX.)
25	4.2	87319	✓	1000	1.8
39	4.2	87283	✗	100	0.39
39	4.2	53500	✓	500	2.0
55	4.2	95644	✓	250	2.0

Compliance: EN 14566. Material Pricing Group: Q1

### KNAUF AQUAPANEL® MAXI SCREWS (SN) COLLATED

Collated 39mm screws. Each pack has 10 belts with 100 screws per belt. Corrosion-protected screws for fixing Knauf AQUAPANEL® to timber frames and light gauge steel profiles (up to 0.7mm) as part of Knauf AQUAPANEL® Interior and Exterior systems. They have a needle point and countersunk heads.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	DIAMETER			ITEMS PER CARTON	kg (APPROX.)
39	4.2	87317	✗	1000	3.0

Compliance: EN 14566. Material Pricing Group: Q1

### Knauf AQUAPANEL® Exterior Stainless Steel Screws (SN)

40mm stainless steel screws specially developed for fixing Knauf AQUAPANEL® Cement Board Outdoor to timber substructures.



DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK SIZE
LENGTH	DIAMETER			
40	4	87197	✗	250

Compliance: EN 14566:2008 + A1:2009. Material Pricing Group: Q1

## AQUAPANEL® ACCESSORIES

**Knauf AQUAPANEL® accessories** are used in conjunction with the **Knauf AQUAPANEL® Cement Boards** to create high quality and economical systems for use on the exterior and interior of any building.

### KNAUF AQUAPANEL® JOINT FILLER – GREY

This is a cement-based material for filling joints and embedding Knauf AQUAPANEL® Tapes and Knauf AQUAPANEL® Reinforcing Mesh as part of the Knauf AQUAPANEL® Exterior and Interior Ceiling systems.




BAG SIZE		MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg				BAGS	TONNES (APPROX.)
20		131094	✓	48	0.96

Shelf Life: 12 Months. Estimating Guide: One bag will cover approximately 28m<sup>2</sup>. Compliance: EN 998. Material Pricing Group: Q1. Available in part pallet quantities.

### KNAUF AQUAPANEL® TAPE

This is a 100mm wide glass fibre tape with an alkaline-resistant coating. It is embedded into Knauf AQUAPANEL® Joint Filler – Grey, AQUAPANEL® Joint Filler and Skim Coat – White, or tile adhesive, to reinforce joints as part of a Knauf AQUAPANEL® Exterior or Interior system.




ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS PER CARTON	kg (APPROX.)
50	100	429471	✓	12	4
20	100	465546	✓	18	5.3

Estimating Guide: 2.1m/m<sup>2</sup>. Material Pricing Group: Q1

### KNAUF AQUAPANEL® EXTERIOR REINFORCING TAPE

This is a 200mm wide meshed glass fabric. It is embedded in Knauf AQUAPANEL® Joint Filler - Grey to reinforce exterior joints where paint or alternative finishes are to be applied on top of the Knauf AQUAPANEL® Exterior Basecoat, as part of the Knauf AQUAPANEL® Exterior and Knauf AQUAPANEL® Ceiling systems.



ROLL SIZE		MATERIAL NO.	EX STOCK	CARTON DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS PER CARTON	kg (APPROX.)
50	200	424086	✗	12	10

Estimating Guide: 2.1m/m<sup>2</sup>. Material Pricing Group: Q1. Available in part carton quantities.

### KNAUF AQUAPANEL® REINFORCING MESH

This is a 1m wide, alkaline-resistant glass fabric mesh designed for complete cover reinforcement of Knauf AQUAPANEL® Exterior Basecoat as part of the Knauf AQUAPANEL® Exterior system, or for use internally with Knauf AQUAPANEL® Joint Filler and Skim Coat – White.



ROLL SIZE		MATERIAL NO.	EX STOCK	PALLET DETAILS	
LENGTH (m)	WIDTH (mm)			ROLLS PER PALLET	kg (APPROX.)
50	1	770764	✗	33	375

Estimating Guide: 1.1m/m<sup>2</sup>. Material Pricing Group: Q1. Available in part pallet quantities.

## AQUAPANEL® ACCESSORIES

### KNAUF AQUAPANEL® BOARD PRIMER

Pre-mixed synthetic dispersion for priming Knauf AQUAPANEL® Cement Board Indoor after jointing and filling.



TUB SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			TUBS	TONNES (APPROX.)
15	49279	✘	24	0.36

Shelf life: 18 months. Estimating Guide: Coverage 40-60g/m<sup>2</sup>, 1:2 dilution ratio with water. Material Pricing Group: Q1. Available in part pallet quantities.

### KNAUF AQUAPANEL® JOINT FILLER AND SKIM COATING – WHITE

This powdered compound is for use with Knauf AQUAPANEL® Cement Board Indoor as either a skim coat or joint filler. When using as a joint filler Knauf AQUAPANEL® Reinforcing Mesh must be embedded.



BAG SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			BAGS	TONNES (APPROX.)
20	131095	✔	48	0.96

Shelf life: 12 months. Estimating Guide: 4.2kg/m<sup>2</sup> for full surface skim. Compliance: EN 998. Material Pricing Group: Q1. Available in part pallet quantities.

### KNAUF INTERIOR SKIM

Ready-mixed water-resistant skim coat for use over Knauf AQUAPANEL® Interior and Knauf AQUAPANEL® Ceiling systems to create a smooth and level finished surface, ready for painting.



BAG SIZE	MATERIAL NO.	EX STOCK	PALLET DETAILS	
kg			BAGS	TONNES (APPROX.)
25	258278	✔	40	1.0

Shelf life: 9 months. Estimating Guide: Coverage 18m<sup>2</sup> per bag at 0.8 mm thickness. Material Pricing Group: Q1. Available in part pallet quantities.




The image is a composite graphic. The top portion shows a perspective view of a bright, modern hallway with glass walls and a highly reflective floor. A man in a red shirt and dark pants is walking away from the camera, pulling a black suitcase. The glass walls reflect the interior and exterior. On the right side, there is a vertical stack of several rows of light-colored, rectangular flooring panels with a distinctive wavy, ribbed top surface. The bottom left corner features a blue triangular graphic element containing the number '10.' in white. The bottom right corner shows a close-up of the flooring panels, highlighting their texture and interlocking design.

# 10.

## Flooring Panels

**Our comprehensive range of dry floor screed panels offers a solution for almost any floor, including raised hollow applications. Knauf industry-leading specialist flooring systems are easier to install than conventional wet screeds and conduct heat more efficiently, making them ideal for use with underfloor heating systems.**

# Choose the right products for your substrate

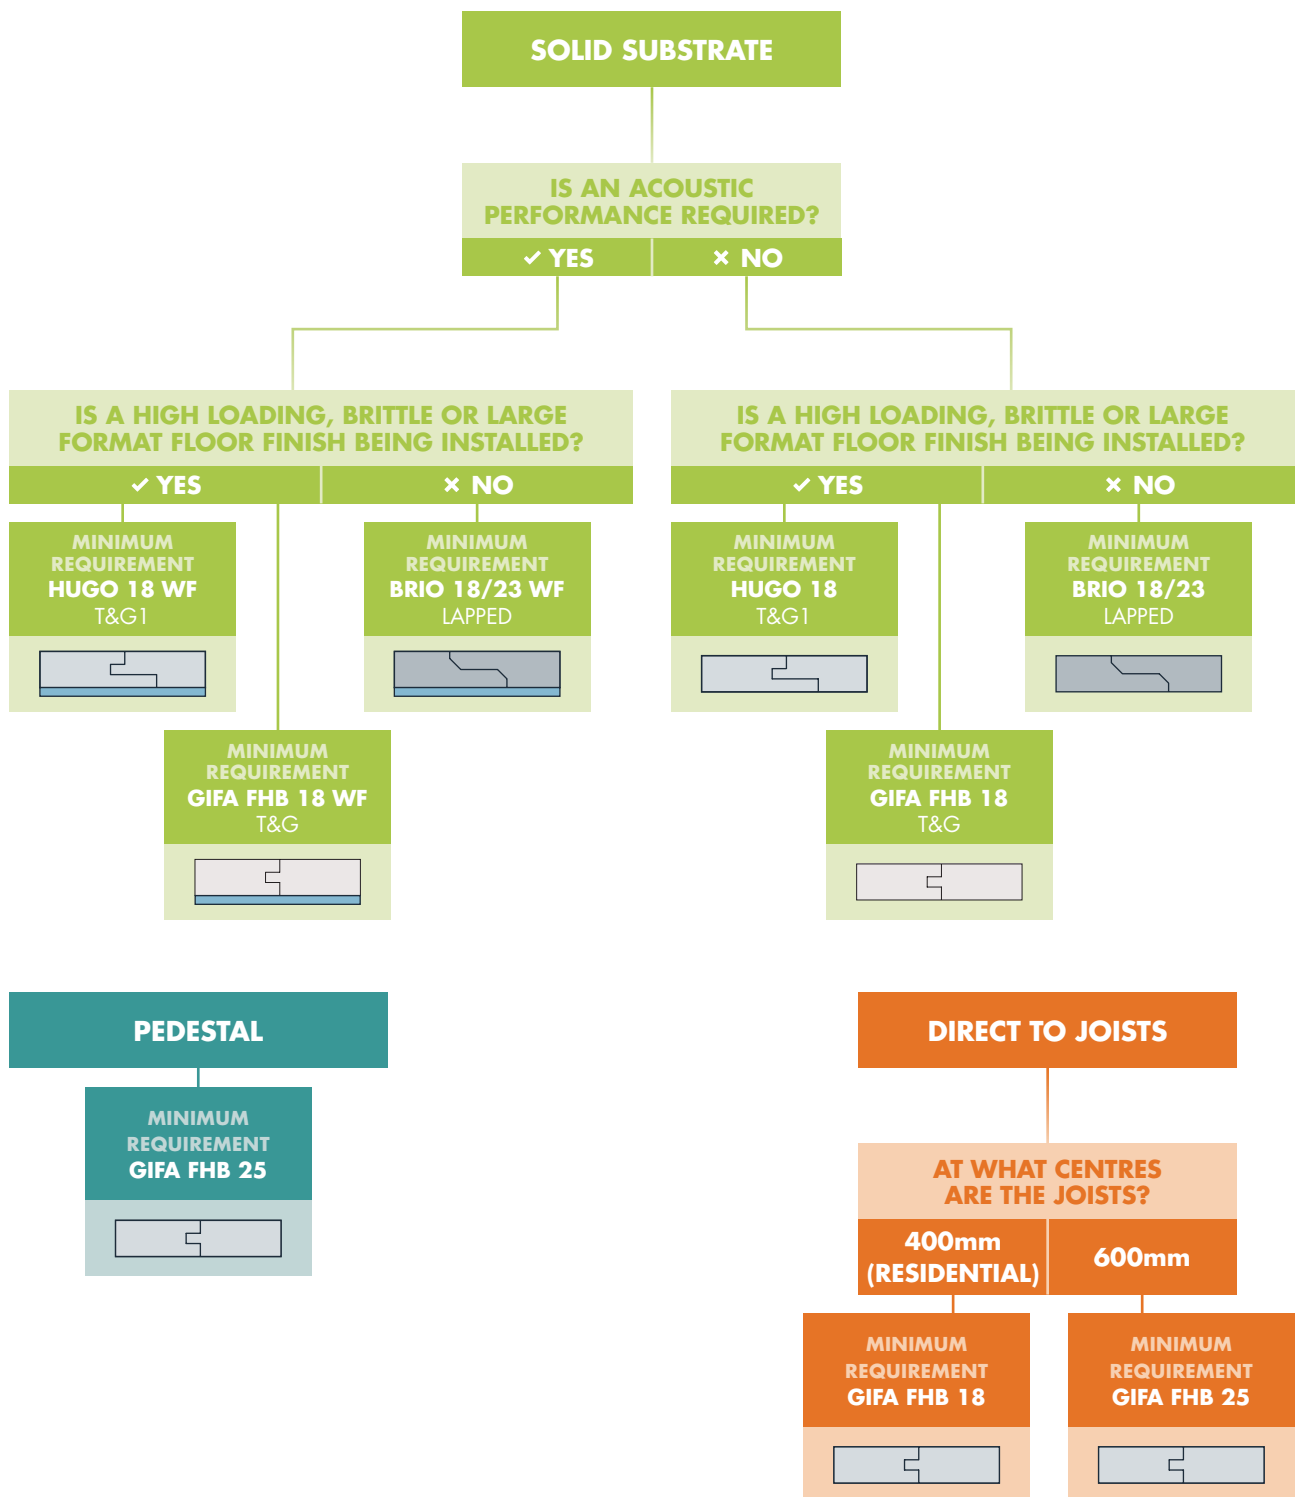

INCREASED PERFORMANCE CHARACTERISTICS CAN BE ACHIEVED USING A THICKER VERSION OF THE BOARD SHOWN ABOVE, WHERE AVAILABLE. ALL BOARD RECOMMENDATIONS IN THIS DOCUMENT ARE KNAUF GUIDANCE ONLY. FINAL SPECIFICATION IS DEPENDENT UPON FLOOR STRUCTURE, FLOOR FINISH, POINT LOADING, PERFORMANCE REQUIREMENTS AND EXISTING BUILD-UP.



FOR FURTHER INFORMATION, CONTACT OUR TECHNICAL TEAM:  
 LIVE WEBCHAT OR PHONE 0800 521 050 (OPTION 2): 09:00 - 17:00  
 OR WRITE TO TECHNICAL-UK@KNAUF.COM  
 WE HAVE A SPECIFICATION TO SUIT YOUR REQUIREMENTS!

# KNAUF FLOORING PANELS

## DRY SCREED FLOOR PANELS

Knauf dry screed panels are high quality interlocking flooring systems using gypsum fibreboard technology. The systems are installed and ready for traffic in a fraction of the time of traditional wet screeds. Knauf dry screed panels are light whilst still providing a tough impact resistant surface. Thermally transparent, they are ideal for underfloor heating systems.

### KNAUF LOW DENSITY FLOOR PANELS

Low density boards provide an economical solution that is quick and easy to install where heavy loading or brittle flooring finishes are not being applied.

	DIMENSIONS (mm)			EDGE PROFILE	DENSITY kg/m <sup>3</sup>	MATERIAL NO.	EX STOCK	PALLET DETAILS		
	TOTAL THICKNESS	WIDTH	LENGTH					BOARDS	m <sup>2</sup>	TONNES (APPROX.)
Brio 18	18	600	1200	Lapped	1100-1200	82667	✓	70	50.4	1.19
HUGO 18	18	600	1200	T&G1	1100-1200	550815	✓	50	36.0	0.81
HUGO 23	23	600	1200	T&G1	1100-1200	602387	✓	35	28.8	0.72
Brio 23	23	600	1200	Lapped	1100-1200	82670	✓	50	36.0	1.10

Compliance: EN 15283-2. Material Pricing Groups: Q3 for Lapped, Q4 for T&G1. Single pallet delivery options available on request.



SEE PAGES 91-96 FOR OUR RANGE OF FLOORING ACCESSORIES

### KNAUF HIGH DENSITY FLOOR PANELS (GIFA)

Structural boards able to span between joists and provide the perfect stable base for brittle or heavy flooring finishes in high loading application areas.




	DIMENSIONS (mm)			EDGE PROFILE	DENSITY kg/m <sup>3</sup>	MATERIAL NO.	EX STOCK	PALLET DETAILS		
	TOTAL THICKNESS	WIDTH	LENGTH					BOARDS	m <sup>2</sup>	TONNES (APPROX.)
FHB 18	18	600	1200	T&G	1500-1600	453665	✓	50	36.0	1.06
FHB 25	25	600	1200	T&G	1500-1600	31256	✓	35	25.2	1.04
FHB 28	28	600	1200	T&G	1500-1600	31545	✓	30	21.6	1.00
FHB 32	32	600	600	T&G	1500-1600	31559	✓	50	18	0.95
FHB 32	32	600	1200	T&G	1500-1600	31326	✓	25	18	0.95
FHB 38	38	600	600	T&G	1500-1600	88636	✓	40	14.4	0.91
FHB 38	38	600	1200	T&G	1500-1600	88635	✓	20	14.4	0.91

Compliance: EN 15283-2. Material Pricing Groups: Q4 for T&G. Single pallet delivery options available on request.



SEE OUR WIDE RANGE OF PEDESTALS ON PAGES 95-96

### Edge Profile

 <b>HUGO</b> T&G1	 <b>BRIO</b> LAPPED	 <b>GIFA FHB</b> T&G
--	--	---

# KNAUF FLOORING PANELS

## ACOUSTIC PANELS

### KNAUF ACOUSTIC DRY SCREED PANELS

Knauf dry screed panels backed with wood-fibre to provide enhanced acoustic performance and excellent impact sound reduction.

	DIMENSIONS (mm)			EDGE PROFILE	DENSITY kg/m <sup>3</sup>	MATERIAL NO.	EX STOCK	PALLET DETAILS		
	TOTAL THICKNESS	WIDTH	LENGTH					BOARDS	m <sup>2</sup>	TONNES (APPROX.)
Brio 18 WF	28	600	1200	Lapped	1100-1200	82669	✓	50	36	0.97
HUGO 18 WF	28	600	1200	T&G1	1100-1200	607370	✓	30	21.6	0.56
HUGO 23 WF	33	600	1200	T&G1	1100-1200	607371	✗	25	18	0.62
FHB 18 WF	28	600	1200	T&G	1500-1600	516417	✓	30	21.6	0.64
Brio 23 WF	33	600	1200	Lapped	1100-1200	82671	✓	40	28.8	0.97

Compliance: EN 15283-2. Material Pricing Groups: Q3 for Lapped, Q4 for T&G and T&G1. Single pallet delivery options available on request. Density excludes WF layer.

### KNAUF ACOUSTIC RESILIENT PANEL




Knauf Acoustic Resilient Panel is a 250kg/m<sup>3</sup> wood fibre with a square edge. Ideal for use in either single or double layers under Knauf flooring panels to improve impact sound insulation.



DIMENSIONS (mm)			EDGE PROFILE	DENSITY kg/m <sup>3</sup>	MATERIAL NO.	EX STOCK	PALLET DETAILS		
TOTAL THICKNESS	WIDTH	LENGTH					BOARDS	m <sup>2</sup>	TONNES (APPROX.)
10	600	1200	Square	250	205256	✓	226	162.8	0.42

Compliance: EN 13986. Material Pricing Group: Q3

### Edge Profile

 <b>HUGO</b> T&G1	 <b>BRIO</b> LAPPED	 <b>GIFA FHB</b> T&G
--	--	---



# WHY USE KNAUF DRY SCREED FLOORING?



- ✓ **No** water required.
- ✓ **No** disposing of contaminated water.
- ✓ **No** pumping equipment.
- ✓ Reduced substructures/foundations.
- ✓ Easy to install
- ✓ Lightweight and thin, yet robust.
- ✓ Thermally transparent.
- ✓ Trafficable after 24 hours.

Amount of water required  
per m<sup>2</sup> sand/cement screed:

**11L** for **75mm** sand/cement

**60L** for **40mm** liquid screed approx.

SCAN THE QR CODE  
TO WATCH OUR VIDEO  
ABOUT THE BENEFITS OF  
OUR DRY SCREED RANGE





11.

## Flooring Accessories

**Knauf has a range of accessories manufactured and designed to maximise the performance of the flooring system.**

# KNAUF FLOORING ACCESSORIES

## DRY SCREED FLOOR ACCESSORIES

### KNAUF BRIO SCREWS

Knauf Brio Screws are used to firmly hold Knauf Brio or Knauf Brio WF Panels together to ensure the adhesive bonds effectively. Always use the correct length to avoid damage to the underfloor and pipes.




	DIMENSIONS (mm)		MATERIAL NO.	EX STOCK	PACK DETAILS	
	LENGTH	DIAMETER			ITEMS/PACK	kg (APPROX.)
Brio 18 Screws	17	4.2	708526	✓	500	0.7
Brio 23 Screws	22	4.2	708531	✓	500	0.9

Material Pricing Group: Q3. Estimating Guide: 1m<sup>2</sup> per 10 screws. 50m<sup>2</sup> per pack of 500 screws.

### KNAUF FLOORING EDGE STRIPS

Knauf Flooring Edge Strip is a mineral wool perimeter strip for use with Knauf Brio and Knauf GIFAfloor systems.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
LENGTH	HEIGHT	WIDTH			ITEMS/PACK	kg (APPROX.)
1200	100	13	450687	✓	50	6.6
1200	100	13	108502	✓	100	13.2

Material Pricing Group: Q3. Estimating Guide: 1.1m per m<sup>2</sup> of floor.

### KNAUF SCHNELLGRUND FLOOR PRIMER

Knauf Schnellgrund Floor Primer is a quick-drying primer to be applied to all Knauf flooring panels ready for surface finishing. Knauf Schnellgrund Floor Primer can also be used as a primer and dust proofer prior to sticking pedestals to the substrate.



TUB SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			TUBS	TONNES (APPROX.)
5	448267	✗	60	0.3

Material Pricing Group: Q3. Estimated Coverage: 62.5m<sup>2</sup> per 5kg tub, when used on Knauf Brio and Knauf GIFAfloor. Available in part pallet quantities.

# KNAUF FLOORING ACCESSORIES

## DRY SCREED FLOOR ACCESSORIES

### KNAUF UNIFLOTT

Knauf Uniflott can be used as a joint and surface filler for Knauf Brio and Knauf GIFAfloor.



BAG SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
kg			BAGS	TONNES (APPROX.)
25	253631	✓	42	1.05

Shelf life: 9 months. Compliance EN 13963, Type 4B. Available in part pallet quantities. Material Pricing Group: P8

### KNAUF GIFABOND BLUE (SINGLE LAYER JOINT ADHESIVE)

Knauf GIFAbond Blue is a flooring joint adhesive, supplied in a bottle for easy application by hand to the tongue and groove edge. For use on Knauf GIFA, Hugo, and Brio flooring boards. EMICODE® EC1 Plus rated for very low emissions.



BOTTLE SIZE	MATERIAL NO.	EX STOCK	PACK DETAILS	
ml			ITEMS/PACK	kg (APPROX.)
1200	676976	✓	6	7.2

Material Pricing Group: Q4. Estimated Coverage: 23m<sup>2</sup> per bottle for 600 x 1200 panels. 12 month shelf life.




# KNAUF FLOORING ACCESSORIES

## DRY SCREED FLOOR ACCESSORIES

### KNAUF GIFAfloor ACOUSTIC ISOLATING STRIP

Knauf GIFAfloor Acoustic Isolating Strip, 60mm x 3mm x 20m, is for Knauf LBS systems.




DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
THICKNESS	WIDTH	LENGTH (m)			ITEMS/PACK	kg (APPROX.)
3	60	20	91287	✓	5	2.9

Material Pricing Group: Q4

### KNAUF RESILIENT ISOLATION STRIP

A purpose made self-adhesive strip which isolates the floor deck from the top of the joist in acoustic floor systems allowing improved acoustic performance.



DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
THICKNESS	WIDTH	LENGTH (m)			ITEMS/PACK	kg (APPROX.)
12	50	5	258303	✓	9	6

Material Pricing Group: PO



# 12.

## **GIFAfloor Access Systems**

**Knauf offers a wide range of products which combine to create floor access solutions for a range of floor finishes and applications.**

# KNAUF GIFAFLOOR ACCESS SYSTEMS


## ACCESS FRAME SYSTEMS

All access frame systems accept 600mm x 600mm access panels, plus all frames and profiles have an adjustable floor finish protective edge.



### KNAUF GIFAFRAME ACCESS PANEL

Knauf GIFAFloor Access Panel is a 1500kg/m<sup>3</sup> gypsum fibreboard, with an engineered chamfered edge and plastic protective strip.



	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
	THICKNESS	WIDTH	LENGTH			m <sup>2</sup>	kg (APPROX)
R34	34	600	600	518872	✘	0.36	19.7
R42	42	600	600	518875	✘	0.36	24.4

Material Pricing Group: Q4

### KNAUF GIFAFRAME

Knauf aluminium access frames provide access points for single layer FHB25 using access panel Knauf R34.



	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
	TO ACCEPT	WIDTH	LENGTH			ITEMS/PACK	kg (APPROX)
AF6 25/34	R34	600	600	30080	✘	1	1.9

Material Pricing Group: Q4

### KNAUF GIFAFRAME UNIVERSAL FOR SINGLE LAYER

Knauf aluminium access frames provide access points for Knauf FHB28, FHB32 and FHB38 using access panels Knauf R42.



	DIMENSIONS (mm)			MATERIAL NO.	EX STOCK	PACK DETAILS	
	TO ACCEPT	WIDTH	LENGTH			ITEMS/PACK	kg (APPROX)
UAF6 38/42	R42	600	600	139306	✘	1	2.5

Material Pricing Group: Q4

### KNAUF GIFAFRAME INSTALLATION PACK

Knauf installation packs contain: 12 adjustable packers to suit different FHB floor height. The pack contains 12 adjustable packers for the access panel to sit on, plus M4 screws to fix the packers in place.



	MATERIAL NO.	EX STOCK	PACK DETAILS	
			ITEMS/PACK	kg (APPROX.)
Installation pack FHB 28/32	139307	✘	12	0.2

Material Pricing Group: Q4.

# KNAUF GIFAFLOOR ACCESS SYSTEMS

## ACCESS FRAME COMPONENTS

Knauf GIFAFloor Access Frame Components allow for construction of multi-panel runs of access panels and for bespoke access panels.



### KNAUF GIFAFRAME PROFILE ACCESSORIES

Knauf aluminium access frame jointing plates for 25mm systems.

	MATERIAL NO.	EX STOCK	PACK DETAILS
			ITEMS/PACK
Straight Jointing Plate	77807	×	1
90° Jointing Plate	77808	×	1

Material Pricing Group: Q4





# 13.

## Appendix

Use our quick index to find the product you need,  
and also read our terms and conditions in full.  
Thank you for your business.

## INDEX

### A

Acoustic 'C' Studs	27
Acoustic and Design	58-75
Access Frame Systems	91
Acoustic Dry Screed Panels	84
Acoustic Panels	84
Acoustic Resilient Panel	84
Adhesives	24-25, 88
Adit	72
Airless Finish	54
Akustikpanel	68
Angle Sections	34, 43
AQUAPANEL® Cement Board SkyLite	77
AQUAPANEL® Interior System	77
AQUAPANEL® Cement Board Indoor	77
AQUAPANEL® Accessories	79-80
AQUAPANEL® Cement Board Floor Tile Underlay	77
AQUAPANEL® Fixings	78

### B

Baseboard	14
Beads	51-52
Belgravia S15	61
Belgravia S24	60
Betokontakt	57
Blackstar Screws	37
Bonding Compound (Plasterboard Adhesive)	24
Brio	83-84
Brio Screws	87

### C

'C' Channel	31,43
'C' Channel Connector	31
'C' Studs	27
CD Ceiling and Wall Liner	33
CD 'U' Mounting Bracket	33
Ceiling and Wall Lining	33
Channel Intersection Connector	31
Coated Metal	35, 37
Collated Drywall Screws	39
Contrapanel	71
Contur S24	64
Core Board	18
Core Board Channel	30
Corner Beads	51
Corner Flex Tape	50
Corridor 400	66
Corrosion Resistant Paint	37
Cove	26
Cove Adhesive	26
'C-T' Stud	30

### D

Danotile	68
Deep Flange 'U' Channel	29
Dry Screed Floor Panels	83-84
Dry Screed Floor Accessories	87-89
Demountable Ceilings - T-grid	60-65
Drywall Angle Bead	51
Drywall Edge Bead	52
Drywall Screws	38-40

### E

Easy Plaster	56
Edge Beads	52
Edge Strips	87

## INDEX

### F

FHB	83-84
FHB WF	84
Fibre Tape	50
Fill & Finish	48
Fill & Finish 30 Premium	46
Fill & Finish 60 Premium	46
Fill & Finish Light	48
Finishing Solutions	53-57
Fireboard	20, 42
Fire Encasement	42-43
Fire Panel	15
Fixings and Accessories	38-40
Fixing Channel	34
Fixing Clip	34, 42
Flexible Metal Tape	52
Flooring Accessories	86-89
Flooring Edge Strips	87
Flooring Panels	83-84

### G

GIFA FHB	83-84
GIFAbond Blue (Single Layer Joint Adhesive)	88
GIFAfloor Access Systems	90-92
GIFAfloor Acoustic Isolating Strip	89
GIFAframe	91
GIFAframe Access Panel	91
GIFAframe Profile Accessories	92
GIFAframe Universal for Single Layer	91
Glass Fibre Tape	42, 50

### H

High Performance Boards	15-22
-------------------------	-------

### I

'I' Stud	28
Isolation Strip	89
Insulating Laminates	23
Internal Bead	57
Intumescent and Acoustic Mastic	44

### J

'J' Channel	30
Jackpoint Screws	39
Joint Adhesive - GIFA	88
Joint Cement Premium	96
Joint Filler (Uniflott)	47
Joint Filler Premium	46
Jointing	45, 52
Jointing Corner Beads	51
Jointing Edge Beads	52
Jointing Products and Accessories	45-52

### L

Low Density Floor Panels	83
--------------------------	----

### M

Metal Sections	26-37
Metal Accessories	34
MF Ceiling Channel	32
MF Connecting Clip	32
MF Nut and Bolt	32
MF Perimeter Channel	32
MF Primary Support Channel	32
Moisture Panel	17
'MW' Stud	28

## INDEX

### N

Non-Demountable Ceilings	68-71
Non-Demountable Ceiling Accessories	73
Nonius Hangers	36

### P

Painting Service	75
Passive Fire Protection Range	41-43
Performance Plus	18
Performance Plus Screws	40
Plank	14
Plasterboard Accessories	24
Plasterboard Adhesive (Bonding Compound)	24
Plasterboard Sealer	24
Plasterboards	12-22
Plaza S15 & S24	62-63
Powdered Jointing	46-47
Primer	24, 87
ProRoll Light	56
ProRoll Max	56
Putty Pads	44

### R

Ready-mixed Jointing	48
Ready-mixed Finishes	54-57
Resilient Isolation Strip	89
Resilient Bar	28

### S

Safeboard	20
Safeboard Joint Filler	50
Schnellgrund Floor Primer	87
Screws	38-40
Self-Supporting Ceilings	66
Self Tapping Screws	39-40
Shaftwall	30
SkyLite	77
Soffit Cleat	31
Solopanel	69
Sound Absorbing Wall Panel - Knauf Adit	72
Soundshield Plus	16
Sound Panel	16
Staggered Stud Clips	28
Standard Boards	13
Strap Hanger	32
Stratopanel	70
Suspension Systems Summary	74

### T

Technical Services	8
Thermal Laminate	23
Training Services	9



**INDEX****U**

---

'U' Channel	29
'U' Channel Perimeter Support	31
UKCA Marking	6
Uniflott	47, 88
Uniflott Applicator	47
Universal Bracket	31
'UW' Channel	29

**V**

---

Vapour Panel	15
Vidiwall	22
Vidiwall Screws	40

**W**

---

Wafer Head Screws	40
Wafer Head Self Tapping	40
Wallboard	13
Wallboard Primer	24
Wood Screws	39

**X**

---

XPS Laminate Plus	23
-------------------	----







## CUSTOMER SERVICE

UK: 0800 521 050  
Eire: 01 4620739  
cservice@knauf.com

## TECHNICAL SERVICE

0800 521 050 (Option 2)  
Live Webchat: 09:00 - 17:00  
technical-uk@knauf.com

## ADDRESSES

Knauf  
Kemsley Fields Business Park  
Sittingbourne  
Kent  
ME9 8SR

Knauf  
87 Broomhill Road  
Tallaght  
Dublin 24  
D24 WR85

## WEBSITE

[www.knauf.co.uk](http://www.knauf.co.uk)  
[www.knauf.ie](http://www.knauf.ie)

## SOCIAL MEDIA

 KnaufUK  
 KnaufUK  
 Knauf UK & Ireland  
 @Knauf\_UK

Creation Date: 01/12/2023  
Revision Reference: 001  
Revision Date: 02/01/2024