


Fine Thread Drywall Screw



Speedline Fine Thread Drywall Screws

- Corrosion resistant, self-tapping steel screws with Phillips recess and bugle head
- Ideal for fixing board to stud up to 0.79mm
- Available in bright zinc and black phosphate finish
- Sizes include (mm) 25, 32, 38, 42, 50, 65, 75, 100

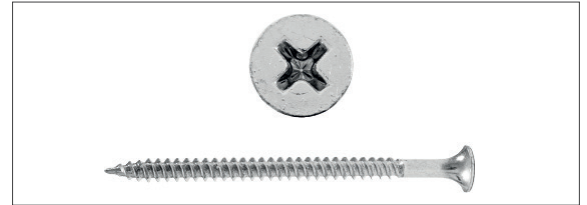

Speedline Fine Thread Collated Drywall Screws

- Suitable for use with a wide range of auto feed screwdrivers
- The collated drywalls allow quick installation of screws into plasterboard
- Available in bright zinc and black phosphate finish
- Sizes include (mm) 25, 35, 38, 45, 50

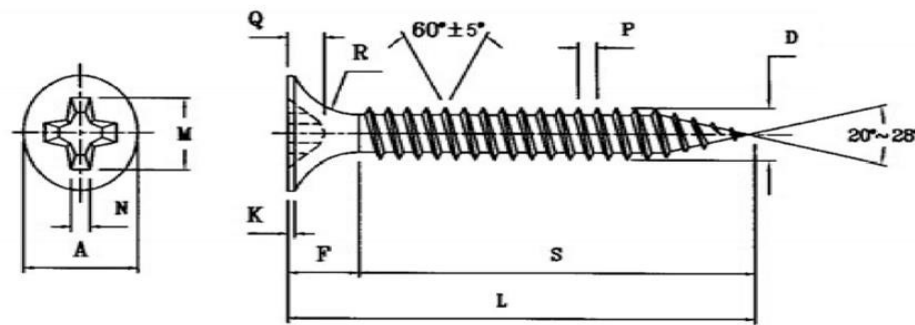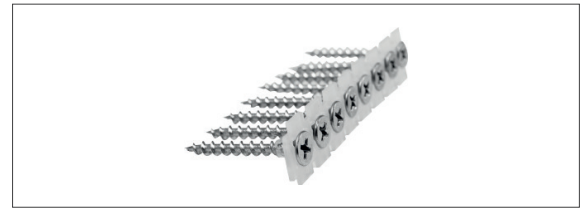

Size	Head Dia. (A)	F	Major Dia. (D)	Pitch (P) +/- 10%	Recess Depth (Q)	R	Recess Width (M)	Drive Size	Torque Kg-cm
3.5	7.8 - 8.5	6.00	3.3 - 3.6	1.49	2.6 - 3.1	4.40	5.10	2	23 min
3.9	7.8 - 8.5	6.00	3.7 - 4.0	1.69	2.6 - 3.1	4.40	5.10	2	31 min
4.2	7.9 - 8.5	6.00	4.0 - 4.3	1.81	2.6 - 3.1	4.60	5.10	2	38 min
4.8	8.8 - 9.4	6.00	4.7 - 5.0	2.30	2.6 - 3.1	4.60	5.10	2	60 min

Unit mm

Information	
Surface Hardness	Min 595 HV
Core Hardness	Max 450 HV
Material	C1018 ~ C1022
Depth of Hardness	M3.5 - M3.9 : 0.05 - 0.18mm M4.2 - M4.8 : 0.10 - 0.25mm
Maximum out of Straightness Limit	L < 100mm = L x 0.152 ÷ 25.4 e.g. L = 75mm = 75 x 0.152 ÷ 25.4 = 0.45mm

Length Tolerance	
≤80mm	± 1.50mm
81-100mm	± 1.75mm

Screw Length	Thread Length
<55mm	S=Full Thread
56mm - 80mm	S=50mm
>81mm	S=60mm