



Prelude 24 Corrosive Resistant TL⁺

Exposed 24mm grid system for higher humidity environments.

Key Features


- Special paint finish and coated Cross Tee clips for enhanced corrosion resistance
- 700 hours salt spray test (EN ISO 9227)
- Durability Class C (EN 13964)
- Ideal for high humidity areas

Physical Data

- Material: galvanised steel with additional protective treatment
- Surface finish: baked polyester paint
- Colour: Global White,




Prelude 24 Corrosive Resistant – Universal Peakform Main Runner & Superlock Clip (Build-to-Bulb Connection)

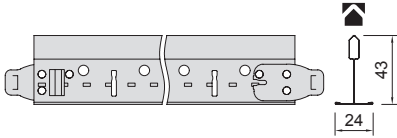


Item No.	Dimensions (mm)				Standard Colours
	Length	Width	Height	Slot Centres	Global White
28 40 42	3600	24	43	100	•

Prelude 24 Corrosive Resistant – TL+ Cross Tees (Hook System, Butt Cutt)




14 30 32	1200	24	38	300	•
14 20 32	600	24	38	-	•

Perimeter Solution



Item No.	Description	Dimensions (mm)		Standard Colours
		Length	Height	Global White
T 1924 LB	Corrosive resistant perimeter angle	3050	24	•

Accessories



A CR7890
Universal retaining clip

Sustainability



25



A+



EN 13964
E1

Fire Reaction



EEA

Euroclass A1
EN 13501-1

Performances & Features



If you would like to order a sample or have any queries about this product please contact our Technical Sales Team on **0800 371 849** or email enquiries@zentia.com