



PRODUCT DESCRIPTION

Rocksilk® Soffit Linerboard Fixings are designed for installing Rocksilk® Soffit Linerboard Standard and Extra onto reinforced concrete or composite steel ceilings.

The tube washers and metal retaining discs are available in black and off-white to match the colour of the facings on Rocksilk® Soffit Linerboard Standard and Extra.

BENEFITS

- Available in black or off-white to match the colour of Rocksilk® Soffit Linerboard Standard and Extra.
- Suitable for concrete, timber or steel decks below 0.7mm thick.
- Tube washer design creates less thermal bridging, allowing lower U-values than alternative fixing methods.

CERTIFICATION



APPLICATIONS



Structural soffit floors

PERFORMANCE

Rocksilk® Soffit Linerboard Concrete Screws

Material	Steel SAE1022 case hardened
Head type	Multiple layer organic
Coating	Oval, TX25 recess
Drilling capacity	Up to 0.7mm S275 steel
Pull-out strength	Concrete C25/30 – 1.98kN Concrete C25/40 – 2.24kN

Rocksilk® Soffit Linerboard Tube Washers

Material	Polypropylene
Pull over value	1.55kN
Head size	75mm

Rocksilk® Soffit Linerboard Pressure Plates

Material	Galvanised Steel
Hole size	6.5mm
Head size	70mm

ROCKSILK® SOFFIT LINERBOARD CONCRETE SCREWS

Length (mm)	Pack Quantity	Nominal Diameter	Product Code
75mm	100	6.1mm	728762
85mm	100	6.1mm	728761
100mm	100	6.1mm	728760
175mm	100	6.1mm	728767
200mm	100	6.1mm	728768
225mm	100	6.1mm	728769
250mm	100	6.1mm	728770
275mm	100	6.1mm	728774



ROCKSILK® SOFFIT LINERBOARD TUBE WASHERS

Length (mm)	Pack Quantity	Tube Diameter	Product Code
100mm White	800	13.6mm	728754
125mm White	700	13.6mm	728755
150mm White	600	13.6mm	728756
200mm White	500	13.6mm	728759
100mm Black	800	13.6mm	728712
125mm Black	700	13.6mm	728751
150mm Black	600	13.6mm	728752
200mm Black	500	13.6mm	728753




ROCKSILK® SOFFIT LINERBOARD PRESSURE PLATES

Colour	Pack Quantity	Product Code
White	100	728765
Black	100	728763



Rocksilk® Soffit Linerboard Standard thickness	Perimeter fix - plastic to concrete		Centre fix – metal to concrete	
	Tube	Screw	Pressure Plate	Screw
130mm	100mm Black x 4	85mm x 4	70mm Black	175mm
160mm	125mm Black x 4	85mm x 4	70mm Black	200mm
185mm	150mm Black x 4	85mm x 4	70mm Black	225mm
220mm	200mm Black x 4	75mm x 4	70mm Black	250mm

Rocksilk® Soffit Linerboard Extra thickness	Perimeter fix - plastic to concrete		Centre fix – metal to concrete	
	Tube	Screw	Pressure Plate	Screw
136mm	100mm White x 4	100mm x 4	70mm White	175mm
166mm	125mm White x 4	100mm x 4	70mm White	200mm
191mm	150mm White x 4	100mm x 4	70mm White	225mm
226mm	200mm White x 4	85mm x 4	70mm White	275mm

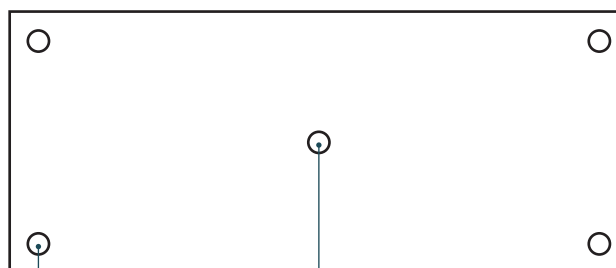

4 x Perimeter tube washer and screw

Central pressure plate and screw

Application

Rocksilk® Soffit Linerboard Fixings are used for installing Rocksilk® Soffit Linerboard Standard and Rocksilk® Soffit Linerboard Extra onto the underside of reinforced concrete or composite steel floor slabs. The tube washers and metal retaining discs are available in black or off-white to match the colour of the facings of Rocksilk® Soffit Linerboard Standard or Rocksilk® Soffit Linerboard Extra.

Four perimeter tube washers and one central metal retaining disc should be used to secure each slab into position.

System Testing

Knauf Insulation maintains declared product characteristics and qualities which are defined in detail in its Declaration of Performances (DoPs) and product literature. The product literature also includes information relating to Knauf Insulation's requirements and recommendations for installation of its products when being used as part of a system.

Any party using, or planning to use, our products in a system (with or without system testing) where performance may be dependent on product characteristics not declared on our DoPs or our product literature, must contact our Technical Service Team.

Knauf Insulation will not accept liability for any failure in system performance due to product characteristics not declared on DoPs or product literature, or not agreed in a Service Level Agreement. In such an event, any warranty given in relation to those products will be invalidated.

Real Performance

Glass and rock mineral wool are easier to install correctly than other insulants, such as rigid boards, because they adapt to any slight imperfections in the substrate and knit together, eliminating any air gaps. Mineral wool is engineered to adapt to any imperfections, and any settlement/movement over time, so it maintains close contact and preserves thermal performance for the life of the building.

Evidence shows the absence of air gaps is crucial to achieving real performance in the relevant application. Any insulation material that doesn't deliver 'as-built' thermal performance is failing in its primary purpose, and therefore presents an unnecessary risk as the construction industry seeks to close the performance gap.

Handling and Storage

Rocksilk® Soffit Linerboard Fixings should be stored properly and handled in such a way as to ensure that the products remain undamaged.

The cardboard boxes used for the supply of Rocksilk® Soffit Linerboard Fixings are designed for short-term protection only. For longer term protection on site, the product should either be stored indoors or under cover and off the ground.

If damaged, the products should be discarded.

Knauf Insulation Ltd

PO Box 10, Stafford Road, St.Helens, Merseyside, WA10 3NS UK **Customer Service:** 01744 766 766

All rights reserved, including those of photomechanical reproduction and storage in electronic media. Extreme caution was observed when putting together and processing the information, text and illustrations in this document. Nevertheless, errors cannot be completely ruled out. The publisher and editors cannot assume legal responsibility or any liability for incorrect information and consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of possible errors pointed out. For the most up-to-date document versions and product information, please always refer to our website.