



## Product Information Sheet



### Product Name


## ISOVER Spacesaver Roll

A mineral wool roll for domestic attic floors. Rolls pre-perforated to 3 x 386cm and 2 x 580cm widths to fit between common joist spacings.

ISOVER G3 Touch - all our mineral wool products are manufactured using G3 Touch technology High performance mineral wool insulation, naturally strong & gentle - made from recycled materials.



# ISOVER Spacesaver Roll

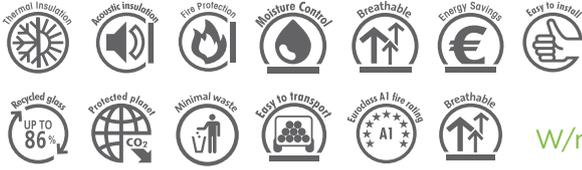

W/mK 0.044



## Benefits and Features

<b>Thermal</b>	Conductivity 0.044 W/mK.	<b>Strength</b>	Excellent Recovery and strength.
<b>Acoustic</b>	Excellent Acoustic Performance.	<b>Easy to Install</b>	Friction fits between timber joists. Easy to install.
<b>Fire</b>	Excellent Fire Safety - A1 Fire Rated, highest possible rating. Completely fire safe - Euroclass A1 fire rating when classified in accordance with BS EN 13501-1.	<b>Environmental credentials</b>	Made from recycled glass. Minimal manufacturing and on-site wastage. Low carbon footprint at manufacture and during transport.



## Standards & Certification

<b>Quality</b>	We hold a Quality Management Standard BS EN ISO 9001: 2008 for manufacturing.	<b>Indoor Air Quality</b>	Awarded the highest standard in indoor air quality - Eurofins "Gold" Label  The Gold Certificate means that ISOVER mineral wool is certified as an outstanding material in terms of Indoor Air Quality emissions regulations.
<b>CE</b>	All products are manufactured in accordance with the CE marking requirements under the Construction Products Regulation,	<b>Durability</b>	Fire Performance Euroclass classification of the product is related to the organic content, which cannot increase with time. Thermal conductivity of mineral wool products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air. (See std EN13162:2012 Annex ZA,Table ZA.1) Will not accelerate corrosion with steel, copper or aluminium. Will not sustain vermin, nor breed or promote fungi or bacteria.
<b>Product Standards</b>	All our products are manufactured in accordance with product standard: BS EN 13162: 2008 and BS EN 13172 Evaluation of Conformity.		
<b>Environment</b>	ISOVER is an ISO 14001:2004 (Environmental Management System) accredited manufacturing facility. This accreditation ensures that all products are manufactured to the stringent standards set out by this management system. EN ISO 13162 EMS 551706 003 BS EN ISO 9001: 2000		

## Variants


	Thickness (mm)	Width (mm)	Length (mm)	Pack area (m <sup>2</sup> )	Pack per pallet
Spacesaver G3 Touch	100	1160	12180	14.13	24
Spacesaver G3 Touch	150	1160	8050	9.34	24
Spacesaver G3 Touch	170	1160	7030	8.15	24
Spacesaver G3 Touch	200	1160	5200	6.03	24

# ISOVER Spacesaver Roll Application

## Attic Floors

### Insulation Between & Over Joists

- 1 ISOVER insulation between joists
- 2 Second layer of ISOVER insulation cross laid over joists
- 3 Vario<sup>®</sup> membrane + tapes
- 4 Gyproc WallBoard

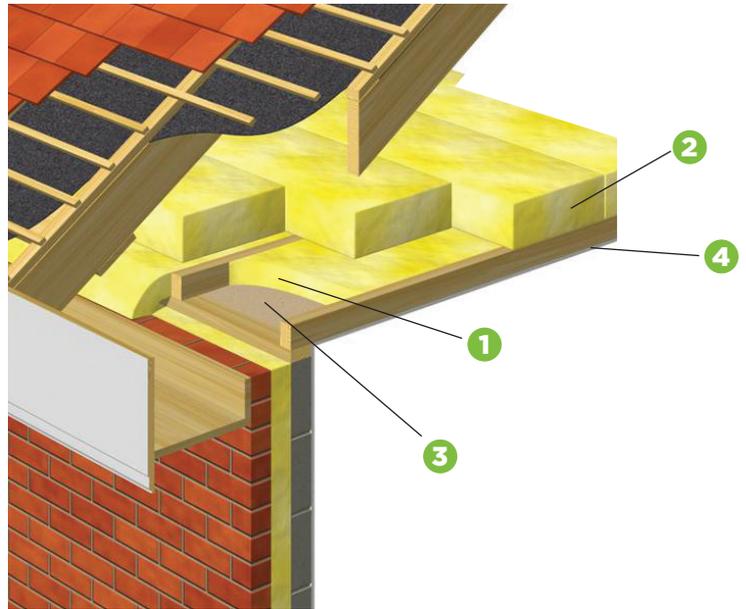

Insulation 1st layer	Insulation 2nd layer	Airtightness/Moisture Control	Board Lining	U-value W/m <sup>2</sup> K
100mm Spacesaver	140mm Heatshield	Vario <sup>®</sup> membrane + tapes	12.5mm Gyproc WallBoard	0.16
150mm Spacesaver	150mm Spacesaver	Vario <sup>®</sup> membrane + tapes	12.5mm Gyproc WallBoard	0.15
150mm Spacesaver	200mm Spacesaver	Vario <sup>®</sup> membrane + tapes	12.5mm Gyproc WallBoard	0.13
200mm Spacesaver*	200mm Spacesaver	Vario <sup>®</sup> membrane + tapes	12.5mm Gyproc WallBoard	0.11

For more applications and product details please visit [www.isover.ie](http://www.isover.ie)



Please contact us for more information on this and other applications:

**Free Phone (ROI):** 1800 744480

**Free Phone (NI):** 0845 3990159

**Email:** [tech.ie@saint-gobain.com](mailto:tech.ie@saint-gobain.com)



**SAINT-GOBAIN**

**ISOVER Ireland**

Unit 4, Kilcarbery Business Park,

Nangor Road, Dublin 22

Tel: +353 (0)1 6298400

Email: [info@isover.ie](mailto:info@isover.ie)

[www.isover.ie](http://www.isover.ie)